P-S-300C
March 10, 1972
SUPERSEDING
Fed. Spec. P-S-300B

FEDERAL SPECIFICATION

SCOURING BRICKS AND HOLDER

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope This specification covers the requirements for scouring bricks and brick holder (see 6.1).

1.2 Classification. The scouring brick and holder shall be of one type and the bricks shall be of the following sizes, as specified (see 6.2).

Size 1 - 3 by 3 by 6 inches.
Size 2 - 4 by 4 by 8 inches.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of solicitation for offers or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-A-591 - Aluminum Alloy Castings.
UU-P-268 - Paper, Kraft, Untreated, Wrapping.
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Shipping, Fiberboard.
PPP-B-665 - Boxes; Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676 - Boxes, Setup.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge from the Business Service Centers at the General Services Administration Regional Office in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-L-10547 - Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:17Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of solicitation for offers or request for proposal shall apply.

National Bureau of Standards (NBS) Handbook

H-28 - Screw Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 S. Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Material. Material shall be as specified herein. Materials not definitely specified shall be in accordance with good commercial quality for the purpose intended.

3.1.1 Pumice stone. The pumice stone shall be a natural, whitish-grey, cinder-like lava rock with a loose, spongy, frothy, cellular texture, free of hard particles that might damage the surface of the grill or griddle.

3.1.2 Aluminum alloy. Aluminum alloy shall conform to composition No. 13, A-13, 43, 360, A-360 or 380 of QQ-A-591.

3.1.3 Thumbscrews. Thumbscrews shall be made from good commercial quality corrosion resistant metal having a tensile strength suitable for the purpose intended or steel, coated with cadmium to resist corrosion, and shall be threaded in accordance with Screw Thread Standards for Federal Services, Unified National Coarse Thread Series, NBS H28. The steel thumbscrews shall show no signs of corrosion when tested as described in 4.3.2.

3.2 General requirements.

3.2.1 Scouring bricks. Scouring bricks, cut from the material specified in 3.1.1 shall be cut to the following dimensions: Size 1 - 3 by 3 by 6 inches; Size 2 - 4 by 4 by 8 inches. All dimensions shall be plus or minus 1/4 inch. The texture and abrasive quality of the pumice rock shall be so selected that the finished brick is suitable for scouring burned foods and carbons from grills and griddles without marring the surface. The brick shall not impart any odor or flabor to the grill or griddles when tested as specified in 4.3.1.

3.2.2 Holder. The holder shall be cast from one of the alloy compositions specified in 3.1.2. The holder incorporating a handle shall be a clamp on flange style, made in 2 pieces, adjustable and designed to be secured to the applicable size brick by adjustment of 2 thumbscrews. The dimensions of the holder shall be approximately 5-1/2 inches lengthwise, 3-1/4 inches widthwise, adjustable to 4-1/4 inches widthwise. One piece of the holder unit shall be in the form of a handle and flange. Each

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:17Z
Check the source to verify that this is the current version before use.

end of the handle shall be drilled through in a plane parallel to the base of the holder. The holes that receive the other half of the holder shall be approximately 3/4 inch in diameter. The holes that receive the thumbscrews from the opposite side of the holder shall be of adequate size to clear 1/4-inch diameter thumbscrews. When the holder is placed on the brick, there shall be enough clearance between the underside of the handle and the brick to permit comfortable holding and utilization of the unit by hand. The other piece of the holder shall consist of a single casting incorporating a flange, two guides of sufficient length for insertion in the other half of the holder with a 1/4 inch threaded boss on each end for receiving the thumbscrews. The guides shall be grooved for clearance of the thumbscrews.

3.2.3 Thumbscrews. Thumbscrews shall be plain or flat point; 1/4 inch in diameter; 20 threads per inch; national coarse thread series 3; and shall be not less than 3-1/4 inches in length overall. the length of the threaded portion of the screw shall be 2-3/4 ± 1/16 inches.

3.3 Identification marking. The holder shall be marked in a permanent manner with the name of the manufacturer, or an abbreviation thereof, or trademark of such known character that the source of manufacture can be readily identified.

3.4 Illustration. The illustration shown herein as figure 1 is for the purpose of identification and is not intended to preclude any brick holder which otherwise meets the requirements of this specification.

3.5 Workmanship. The bricks shall not be cracked, chipped, or broken, and shall be free of any defect that may impair the use of the end item. Holders shall be smoothly finished and the castings shall be free of blowholes, porosity cracks, and sharp edges that may cause injury. The occurrence of defects shall not exceed the acceptable quality level specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor's inspection responsibility. Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. The Government reserves the right to perform any inspections where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection for acceptance. Inspection shall be in accordance with the provisions of MIL-STD-105, except where otherwise indicated.

4.2.1 Certificate of compliance. The contractor shall submit a certificate of compliance to the contracting officer certifying that the materials used in the bricks and the component parts of the holder conform to the requirements prescribed herein.

4.2.2 End item inspection. A lot shall consist of all the holders and scouring bricks of the same size submitted for acceptance at one time. The sample unit shall be one completely fabricated scouring brick with holder.

4.2.2.1 Visual examination. A visual examination of the end item shall be made in accordance with the defects listed in table I. The inspection level shall be level 1 and the acceptable quality level (AQL) shall be 6.5 expressed in terms of percent defective.

TABLE I. Examination of defects

Examine		Defect
Appearance:	Brick	Any cracks, large chips, broken areas. Any noticeable odor. Hard sharp imbedded particles.
	Holders	Any blowholes, cracks, or sharp protrusions.
Workmanship:	Bricks	Not uniform porosity.
	Holders	Not design specified. Thumbscrews missing, not readily adjusted.

4.2.2.2 Dimensional examination. A dimensional examination of the end item shall be made in accordance with the defects listed in table II. The inspection level shall be S-3 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:17Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensional examination

Examine	Defect
Bricks: Length Width Thickness	Any dimension that varies from specified dimension by more than 1/4 inch.
Holders	Not adjustable to fit both size bricks.

4.2.2.3 Examination of preparation for delivery. An examination of the preparation for delivery shall be made in accordance with the defects listed in table III. The sample unit shall be one shipping container completely prepared for delivery. The inspection level shall be level S-2 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

TABLE III. Examination of preparation for delivery

Examine	Defect
Packaging	Not level specified. Materials and construction not as specified.
Packing	Not level specified. Separator sheets not in position, missing. Any component missing, nonconforming, damaged or otherwise defective, affecting serviceability.
Count	Less than the specified or indicated quantity.
Weight	Gross weight exceeds specified requirements.
Markings	Interior or exterior markings (as applicable) omitted, illegible, incorrect, incomplete, or not in accordance with contract requirements.

4.3 Tests.

4.3.1 Odor/flavor test. Pour a liberal amount of cooking oil on a warm grill plate. Scour with one surface of scouring brick and examine for compliance with 3.2.1.

4.3.2 Corrosion test (steel thumbscrews). Thumbscrews shall be placed in boiling 10 percent (by weight) aqueous solution of sodium chloride for a period of not less than 15 minutes. The part upon being removed from the solution shall be immediately immersed for at least one hour in a 10 percent (by weight) aqueous solution of sodium chloride at room temperature of 68 to 85 degrees F. The part shall then be removed from this solution and without having adhering liquid wiped off, allowed to dry for at least 24 hours at room temperature (68 to 85 degrees F.) and then wiped free of any residue and examine for compliance with 3.1.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C, as specified (see 6.2).

5.1.1 Level A. Each brick and each holder shall be individually wrapped in paper conforming to UU-P-268, grade B, basis weight not less than 60 lbs. (24 x 36-500). The wrapping shall be secured with tape conforming to type III, grade B of PPP-T-45. Alternatively, each brick and each holder shall be packaged in a close-fitting box conforming to PPP-B-566, PPP-B-665, or PPP-B-676. The box shall be closed in accordance with the closure requirements of the box specification.

5.1.2 Level B.

5.1.2.1 Bricks. Each brick shall be wrapped as specified in 5.1.1.

5.1.2.2 Holders. Twelve holders, wrapped as specified in 5.1.1, shall be packaged in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification.

5.1.3 Level C. The bricks and holders shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:17Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Bricks. Bricks of one size, packaged as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-621, class 2; PPP-B-601, overseas type; PPP-B-585, class 3; PPP-B-636, class weather resistant. The bricks shall be cushioned with separator sheets of corrugated fiberboard or cellulose cushioning material to afford protection against shipping and breakage. Boxes shall be closed, sealed and strapped in accordance with the appendix to the applicable box specification. The gross weight of the wood boxes shall not exceed 150 pounds; of the fiberboard boxes, 70 pounds.

5.2.1.2 Holders. The holders, packaged as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-621, class 2; PPP-B-601, overseas type; PPP-B-585; class 3; or PPP-B-636, class weather-resistant. Each wood box shall be lined with a case liner conforming to and sealed in accordance with MIL-L-10547. The fiberboard boxes shall be closed and sealed with tape in accordance with the appendix to the box specification. Boxes shall be strapped in accordance with the appendix to the applicable box specification. The gross weight of the wood boxes shall not exceed 100 pounds; of the fiberboard boxes, 70 pounds.

5.2.2 Level B.

5.2.2.1 Bricks. Twenty-four bricks size 4 by 4 by 8 inches, or thirty-six bricks, size 3 by 3 by 6 inches shall be packed in a close-fitting box conforming to PPP-B-636, class domestic.

5.2.2.2 Holders. Four packages of holders, packaged as specified in 5.1.2.1, shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification.

5.2.3 Level C. The bricks and holders, packaged as specified in 5.1.3, shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification rules and National Motor Freight Classification rules.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. In addition to any special markings required by the contract or order, all interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special markings required by the contract or order, all interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The scouring bricks and holder are intended for use in the scouring and cleaning of grills and griddles.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Size of scouring brick required (see 1.2).
(c) Selection of applicable packaging and packing levels (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:17Z
Check the source to verify that this is the current version before use.

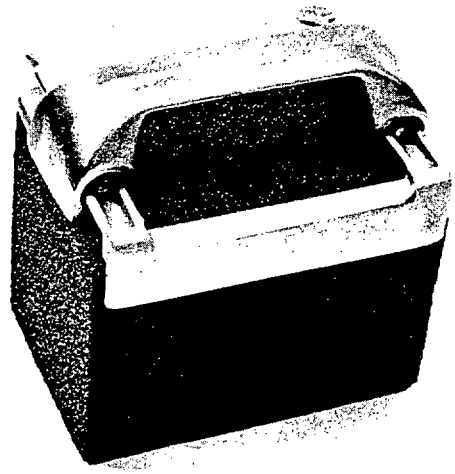


Figure 1

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:17Z
Check the source to verify that this is the current version before use.