INCH-POUND

MIL-C-44124B
30 September 1991
SUPERSEDING
MIL-C-44124A
7 October 1988

MILITARY SPECIFICATION

COVER, BODY ARMOR, FRAGMENTATION PROTECTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a cover for the ground troops fragmentation protective vest body armor.

1.2 Classification. The cover shall be one class in the following sizes as specified (see 6.2).

Class 1 - Deleted (see 6.5)
Class 2 - Desert camouflage pattern (3 color)

Sizes

X-Small
Small/Medium
Large/X-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8470

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bag, Plastic, Folded Garment
A-A-50199	-	Thread, Polyester Core, Cotton-, or Polyester-Covered
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-F-10884	-	Fasteners, Snap
MIL-F-21840	-	Fastener Tapes, Hook and Loop, Synthetic
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-W-43668	-	Webbing, Textile, Bulked Nylon
MIL-C-44034	-	Cloth, Twill, Camouflage Pattern, Cotton and Nylon for Desert Uniform

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Chromatic Transference Scale

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, P.O. Box 12215, Durham, NC 27709.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Basic material. The cloth for the class 2 cover shall conform to class 3 of MIL-C-44034.

3.2.1.1 Printed seconds. The cloth for the front facing (shoulder pad, lower side only), armhole facing (front, top, and under), armhole facing (back, top, and under), armhole facing (yoke, back, and front), back yoke, diagonal slot reinforcement piece, vertical slot reinforcement piece, and grenade hanger reinforcement piece shall be camouflage pattern basic material, ground shade cloth, or printed seconds cloth. Ground shade cloth shall be dyed in conformance to MIL-C-44034 prior to overprinting of the camouflage pattern. Ground shade cloth shall meet the physical, mechanical, and dimensional requirements for finished fabric specified in MIL-C-44034.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

Printed seconds shall be cloth which has been rejected only for defects pertaining to color, infrared reflectance, or camouflage print patterns cited in MIL-C-44034.

3.2.2 Webbing, nylon. All nylon webbing shall be 1 inch wide, dyed Tan 380 conforming to type III (alternate) of MIL-W-43668.

3.2.3 Fastener tape, hook, and loop. The hook and loop fastener tapes shall conform to type IV, class 1 of MIL-F-21840, except that the color shall be Tan 380. The width shall be as specified in table II, as applicable.

3.2.4 Thread. The thread for all stitching shall be cotton-, or polyester-covered polyester core, color khaki P-1, C.A. 66019 conforming to A-A-50199. The thread sizes shall be as specified in table II. The dyed thread shall show colorfastness to laundering equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering.

3.2.5 Fasteners, snap. The snap fasteners shall conform to style 2A, finish 2 of MIL-F-10884. The male component shall be the stud with either size 1 or size 2 eyelet, and the female component shall be the socket with either size 1 or size 2 button. The size selected shall meet the requirements for a secure clinch of the assembled materials.

3.2.6 Size, identification, and instruction label. The cover shall have a combination size, identification, and instruction label conforming to type VI, class 14 of DDD-L-20. The item description for class 2 shall be "Cover, PASGT Vest, Camouflage Pattern: Desert". The label shall show fastness to accelerated laundering. Format and contents of the instruction label shall be as follows:

INSTRUCTIONS

1. Wear as cover over PASGT VEST in desert area.
2. Follow instruction sheet for attaching cover to vest.
3. When opening vest for ventilation, fold vest front flap back. Attach front left and right tape fastener to vest front fasteners: AVOID OVERHEATING THE BODY.
4. Cover can be hand laundered. Make sure all soap is thoroughly rinsed out.
5. DO NOT STARCH.

3.2.7 Instruction sheet for attaching cover to vest. Each cover shall be furnished with an instruction sheet. The instruction sheet shall be printed on white bond paper. The contents and printing of the instruction sheet shall be in accordance with figure 1.

3.3 Construction. The construction shall conform in all respects to the requirements specified in table II and herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

3.3.1 Stitches, seams, and stitchings. All stitches, seams, and stitching types except bartacking shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams occur. Unless otherwise specified in table II, seam allowances for all stitching shall be 3/8 ± 1/16 inch.

3.3.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.3.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin runouts occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or runoff stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area, continue over the defective area, and continue a minimum of 1 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.3.1.2 Types 401, 502, 503, 504, 515, 516, and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.3.1.1.1a and 3.3.1.1.1b except substitute 3/4 inch for 1 inch wherever 1 inch appears.

3.3.1.3 Bartacks. Bartacks shall be as specified in table II, and be free from thread breaks and loose stitching.

3.3.1.4 Thread ends. All thread ends shall be trimmed to a length of not more than 1/4 inch.

3.3.2 Setting of snap fasteners. A hole shall be prepunched to receive the button and eyelet components of the snap fasteners. The hole shall be smaller than the outside diameter of the button and eyelet barrels so that the barrel must be forced through the hole. The hole shall not be punched in the setting operation with the button or eyelet barrel. The fasteners shall be securely clinched without cutting the adjacent materials and no more than three splits shall occur in the button or eyelet barrels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

3.3.3 Fusing of ends of nylon webbing. All ends of nylon webbing shall be fused. The apparatus used to fuse the webbing ends shall be capable of providing sufficient heat to provide a smooth edge and with the cut ends of the webbing yarns all fused together. Fusing of the webbing ends shall be accomplished prior to being assembled for stitching.

3.3.4 Location marks. Marks for showing location of component parts on the cover may be done with the use of drill holes. Drill holes on the cover shall be located such that the holes are completely and permanently covered by the component part.

3.4 Repairs. Except as otherwise specified herein, repairs are not allowed to be made to the cover.

3.5 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a Government furnished shaper pattern is forwarded, the component shall conform to that pattern.

3.6 Patterns. Standard patterns, which provide an allowance for all seams will be furnished by the Government and shall be used by the contractor as a guide for cutting working patterns only. The standard patterns shall not be altered in any manner and the working patterns shall be cut to conform exactly with the standard patterns.

3.6.1 Pattern parts. The component parts of the cover shall be cut from material as specified in accordance with pattern parts indicated in table I.

TABLE I. List of pattern parts

Material	Nomenclature	Cut
Cloth, twill, cotton and nylon, desert camouflage (see 3.2.1 and 3.2.1.1)	Back	1
	Front, left and right	2
	Collar, under	1
	Collar (top) and front yoke (combination), left and right	2
	Shoulder pad, upper and lower	4
	Front facing, inside	2
	Armhole facing, front, top and under	4
	Armhole facing, back, top and under	4
	Armhole facing, yoke, back and front	2
	Back yoke	1
	Diagonal slot reinforcement piece	2
	Grenade hanger reinforcement piece	2
	Vertical slot reinforcement piece, front and back	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts (cont'd)

Material	Nomenclature	Cut
Webbing, nylon 1 inch wide	Inside side strap (Five pieces: top and bottom left and right, and center strap)	2
	Grenade hanger	2
Fastener tape, 2 inches wide	Armhole facing loop tape, long	8
	Armhole facing loop tape, short	10
	Finished side strap shaper	

3.7 Manufacturing operations requirements. The cover shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations, as long as the intended finish appearance of the item is not effected by the change in sequence. Any basting or holding stitching required to facilitate manufacture is permissible, provided the thread is removed or does not show in the finished cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut cover. a. Cut cover in strict accordance with patterns furnished which show size, shape, directional lines, placement of components, and notches for proper assembling of all parts. All parts shall be cut so that at assembly the camouflage printed surfaces face out. b. Cut all parts out of one piece of material except all reinforcements and facings may be cut from ends. c. Each webbing or fastener tape component shall be cut in the required length as specified or as indicated by patterns, ± 1/8 inch. Fuse all cut ends of webbing components (see 3.3.3).						
2.	Replacement of damaged parts. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in table IV shall be removed from production and replaced with non-defective and properly matched components.						
3.	Mark, ticket, or bundle. Mark, ticket, or bundle cut parts of the cover to insure uniform size and proper assembly throughout the cover. Any method of marking may be used except: a. Metal fastening devices. b. Sew-on tickets. c. Adhesive type tickets which leave traces of adhesive on the material upon removal of the tickets.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Attach label to back yoke. Position the combination label on the bottom center (as worn) of the back yoke, 2 ± 1/4 inches from the bottom raw edge. Stitch on all four sides with stitching 1/8 ± 1/16 inch from edge of label. Stitching shall not be through printing on label.	301	LSbj-1	10-14	50	50	
5.	Overedge stitching of components. All overedge stitching shall be with a 3/16 ± 1/16 inch stitch gage.						
	a. Overedge back piece as follows:	502, 503 or 504	EFd-1	8-10	70	70	
	(1) Along the armholes and neckline edges including the shoulder seam allowance for joining the back to the fronts. (See optional stitching in operation 18.a.)						
	(2) Along the vent side edges at the bottom from the bottom edge to the end of the angular cut.						
	b. Overedge each front piece as follows:	502, 503 or 504	EFd-1	8-10	70	70	
	(1) Along the armhole, shoulder seam allowance for joining the front to the back and the neckline edges. (See optional stitching in operation 18.a.)						
	(2) Along the vent side edge at the bottom from the bottom edge to the end of the angular cut.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Overedge stitching of components. (cont'd)						
	c. Overedge top and back edges of the front facings.	502, 503 or 504	EFd-1	8-10	70	70	
	d. Overedge separately the edges of the top and bottom shoulder pad cover along the short reversed (inward) curved area and between the notches for the elastic openings.	502, 503 or 504	EFd-1	8-10	70	70	
	e. Overedge each combination top collar-front yoke piece along the edges which join with the back yoke (neck and shoulder) and also along the center joining seam.	502, 503 or 504	EFd-1	8-10	70	70	
	f. Overedge the back yoke along the neckline and shoulder joining seam edges.	502, 503 or 504	EFd-1	8-10	70	70	
	g. Overedge the inner edge (joins with armhole edge of cover assembly) of each armhole facing piece. (See optional stitching in operation 18.a.)	502, 503 or 504	EFd-1	8-10	70	70	
	h. Overedge around entire periphery of the grenade hanger reinforcement pieces.	502, 503 or 504	EFd-1	8-10	70	70	
	i. Overedge undercollar along neckline edge.	502, 503 or 504	EFd-1	8-10	70	70	
6.	Make vertical slots on front pieces.						
	a. Position vertical slot reinforcement piece on outside of front piece with the cut lines (indicated by solid line on pattern) of each superimposed upon each other within 1/16 inch. Stitch reinforcement to front	301		10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make vertical slots on front pieces. (cont'd)						
	with two parallel rows of stitching 9/16 ± 1/16 inch apart with the cut line centered between the rows of stitching, ± 1/16 inch. Stitching shall be carried across the ends 1/8 ± 1/16 inch from the ends of the cut lines.						
	b. Cut opening of slot through reinforcement and front along the cut line and tongue notch the ends of the opening. Turn reinforcement through the cut opening and fully work out edges, forming the slot. Topstitch around slot 1/8 ± 1/16 inch from the folded edges. During the stitching operation reinforce each end of the slot with a line tack positioned horizontally across the end(s). The finished length of the slot shall be 1-5/8 ± 1/8 inches.	301		10-14	50	50	
	c. Stitch reinforcement piece to front all around with the stitching 1/8 to 3/16 inch from overedged edges.	301	LSbj-1	10-14	50	50	
7.	Make vertical slots on back piece.						
	Make two vertical slots on back piece in the same manner as specified in operations 6a, b, and c.						
8.	Attach grenade hangers to front pieces, typical left and right, and stitch reinforcement to front.						
	a. Position grenade hanger webbing on front outer side in location indicated on pattern, ± 1/8 inch, with cloth reinforcement smooth on the underside and located centrally under the hanger webbing.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
8.	Attach grenade hangers to front pieces, typical left and right, and stitch reinforcement to front. (cont'd)						
	b. Bartack hanger to front with four vertical 7/8 to 1 inch long bartacks. The two inner bartacks shall be located as shown by notches on pattern, ± 1/8 inch. The two end bartacks shall be located 3/16 ± 1/16 inch from the ends of the webbing.	Bartack		42 per bartack	50	50	
	c. Between the second and third bartacks stitch across top and bottom edges of the webbing with stitching located 1/8 ± 1/16 inch from edge forming loops in each end of the webbing only. As an option, the stitching may continue across the webbing forming box stitch pattern.	301		8-10	50	50	
	d. Secure cloth reinforcement to front with a box stitch pattern with stitching located 1/4 ± 1/8 inch from edges of grenade hanger. This operation to be performed with outer surface of front facing up using the edges of the grenade hanger as a guide.	301		8-10	50	50	
9.	Make shoulder pad covers.						
	a. With the inside surface facing up, (typical top and under shoulder pad cover pieces) fold edges between the notches indicated on the pattern back 3/8 ± 1/16 inch and stitch down with row of stitching located 1/8 ± 1/16 inch from folded edge.	301	EFa-1	10-14	50	50	
	b. With the outer surfaces facing each other, superimpose the top piece on the under piece with the edges evenly aligned. Stitch the cover together in three places along the edges. The edges shall not	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make shoulder pad covers. (cont'd)						
	be joined between the areas of the fold backs and the edges that are overedged. The seam allowance for joining shall be 1/4 inch.						
	c. Turn pad cover right side out and force out edges. Edge stitch 3/16 ± 1/16 inch from edge in three places leaving the same areas unstitched as specified in operation 9b. The length of the opening after stitching shall be 1-1/8 ± 1/8 inches.	301	SSe-2(b)	10-14	50	50	
10.	Make diagonal slot on front pieces.						
	a. Position diagonal slot reinforcement piece on outside of front piece with the cut lines (indicated by solid line on pattern) of each superimposed upon each other within 1/16 inch. Stitch reinforcement to front with two parallel rows of stitching 7/16 ± 1/16 inch apart with the cut line centered between the rows of stitching, ± 1/16 inch. Stitching shall be carried across the ends 1/8 ± 1/16 inch from the ends of the cut lines.	301		10-14	50	50	
	b. Cut opening of slot through reinforcement and front along the cut line and tongue notch the ends of the opening. Turn reinforcement through the cut opening and fully work out edge, forming the slot. Topstitch around slot 1/8 ± 1/16 inch from the folded edges. During the stitching operation, reinforce each end of the slot with a line tack positioned vertically across the end(s). The finished length of the slot shall be 6-3/8 ± 1/8 inches.	301		10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make diagonal slot on front pieces. (cont'd)						
	c. Turn in raw edges of reinforcement piece 3/8 ± 1/16 inch and stitch to front all round with stitching 1/8 ± 1/16 inch from folded edge.	301	LSd-1	10-14	50	50	
11.	Attach fastener tapes on front pieces below slots.						
	a. Cut a 1-1/2 ± 1/8 inches length of 2 inches wide hook fastener tape and position on inside of front under slot opening in location shown on pattern, ± 1/8 inch. Stitch to front around all four sides 1/8 ± 1/16 inch from edges.	301	LSbj-1	10-14	50	50	
	b. Cut a 1-3/4 ± 1/8 inches length of 1 inch wide loop fastener tape and position on outside of front under slot opening in location shown on pattern, ± 1/8 inch. Stitch to front around all four sides, 1/8 ± 1/16 inch from edges.	301	LSbj-1	10-14	50	50	
12.	Form corners of vents on fronts and back pieces.						
	At each vent, fold back bottom edge face to face 1-1/4 ± 1/8 inches. Fold raw edge back to back 1/4 to 3/8 inch. Stitch along the side edges of the vent the length of the fold back. Turn vent corner right side out and work out corner.	301		10-14	50	50	
13.	Attach front facings to front, typical left and right.						
	a. Position front and front facing face to face with bottom and neck edges evenly aligned. Stitch facing to front from top edge, along neckline, down front and	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Attach front facings to front, typical left and right. (cont'd)						
	across bottom of front to back edge of facing. Stitch margin shall be 3/8 ± 1/16 inch except stitching across bottom shall be 1-1/4 ± 1/8 inches from edges.						
	b. Trim corner if necessary and turn facing right side out. Work out corner fully. Topstitch along edge of facing from top edge to bottom and along the bottom with stitch margin 3/16 ± 1/16 inch. Continue stitching along back edge of facing from bottom to top and across top edge with stitch margin 3/16 ± 1/16 inch. Prior to continuing the stitching along the back, the bottom hem required in operation 15 shall be formed.	301	SSe-2(b) and LSbj-1	10-14	50	50	
14.	Join shoulders of fronts and back.						
	Join fronts to back at shoulder. Turn seam allowance toward the back and raise stitch 3/16 ± 1/16 inch from seam.	301	LSq-2	10-14	50	50	
15.	Hem bottoms of fronts and back and stitch down vent edges.						
	Hems at bottoms of fronts and back shall be formed by folding edge(s) back 1-3/8 inches, fold raw edge under 1/4 ± 1/16 inch and stitch 1/16 to 1/8 inch from folded edge. Hem shall finish 1-1/8 ± 1/8 inches wide. During stitching of the hem(s), simultaneously stitch down the fold backs of the vent edges with stitching 1/8 ± 1/16 inch from the folded edges.	301	EFb-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Stitch left and right shoulder pad covers to neckline of cover.						
	a. Determine center of bottom piece of shoulder pad cover and mark.						
	b. Position center mark at shoulder seam of cover and stitch bottom piece of shoulder pad cover opening to neckline of cover. Center of shoulder pad cover shall finish on the center of the cover shoulder seam within 1/8 inch. Front edge of cover, as marked on pattern, shall be towards front of cover.	301	SSa-1	10-14	50	50	
17.	Assemble front and back armhole facings.						
	a. Join the ends of top ply of the front and back top armhole facings together. Turn and raise stitch joining seam allowance with stitching located 3/16 ± 1/16 inch from joining seam.	301	LSq-2	10-14	50	50	
	b. Join the ends of top ply of the front and back under armhole facings together. Turn and raise stitch joining seam allowance with stitching located 3/16 ± 1/16 inch from joining seam.	301	LSq-2	10-14	50	50	
	c. Position under facing on top facing face to face with the outer edges evenly aligned and with the end joining seams superimposed on each other within 1/8 inch. Stitch around the entire periphery of the outside edge.	301	SSe-2(a)	10-14	50	50	
	d. Turn facing right side out and topstitch 3/16 ± 1/16 inch from the folded edge.	301	SSe-2(b)	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Assemble armhole facing to cover, typical left and right sides.						
	a. With outer surface of cover facing up, align edges of facing with armhole edge of cover. The front and back halves of the facing shall face the front and back sides of the cover respectively. Join the armhole cover, with the shoulder seam of cover and the facing seam matching, ± 1/8 inch. The raw edges of the bottom of the facings shall be even with the raw edges of the cover front and back at the armhole. Stitch armhole facing to cover around entire armhole. For 515, 516, or 519 stitching, the safety stitch shall be 3/8 ± 1/16 inch from edge and the gage for overedge stitching shall be 3/16 ± 1/16 inch.	301 or 401 or 515, 516 or 519		10-14 10-14 10-14	50 50 50 (Chain stitching) 70 (All overedge stitching)	50 70 70 70	
	NOTE: If 515, 516, or 519 stitch type is used, overedging of the armholes on the front and back pieces required in operations 5a(1) and 5b(1) and overedging of the inner edges of the armhole facing pieces required in operation 5g shall be omitted.						
	b. Join side seams of cover and armhole facing with a continuous row of stitching from inner edge of armhole facing to top of vent opening (at side seams). Safety stitch shall be 3/8 inch gage and overedge stitching shall be 3/16 ± 1/16 inch.	515, 516 or 519	SSa-2	10-14	50 (Chain stitching) 70 (All overedge stitching)	70 70	
	c. Turn facing to the inside of the cover and topstitch 3/16 ± 1/16 inch from the folded edge.	301	SSe-2	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Attach loop fastener tape on armhole facings. General Requirements a. The fastener tapes shall be attached around the periphery of the armhole facing with the outer edges aligned with outer edge of facing, +0, -3/16 inch. Ends of tapes shall be overlapped 1/8 inch minimum but not more than the amount necessary to properly fit the tapes around the facings. All tapes shall be attached with stitching along all edges of the tapes located 1/8 ± 1/16 inch from the edges. The tapes and facing shall finish without pleats or puckers. The tape may be joined prior to assembling to facing by prestitching the overlaps. b. The fastener tapes consist of four long pieces and five short (wedge) pieces cut in accordance with the patterns, ± 1/8 inch. The tapes shall be attached on the surface of the armhole facing which faces out. The nine pieces of fastener tapes shall be attached on the facing as follows in the order indicated. (1) Attach three short wedge pieces on the top portion with the center piece centered within 1/8 inch on the joining seam of the facing. The long edge of the wedge shall be along the outer edge of the facing. (2) On each side below the short pieces attach a long piece. (3) On each side below the long pieces attach a short wedge piece with the long edge along the inner edge of the facing.	301		10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN/ LOOPER	THREAD COVER
19.	Attach loop fastener tape on armhole facings. (cont'd)						
	(4) On each side below the short pieces attach a long piece.						
20.	Make yoke and collar assembly.						
	a. With the inside surface of the combination top collar-front yoke facing up (typical left and right), fold front yoke side edge back 1-1/4 ± 1/8 inches. Fold raw edge under 1/4 ± 1/16 inch at side and top. Stitch along the folded edges 1/16 to 1/8 inch from edge.	301	EFb-1	10-14	50	50	
	b. Join combination top collar-front yoke pieces at the center seam.	301	SSa-1	10-14	50	50	
	c. Join top collar-front yoke sub-assembly to back yoke at the shoulders and along the neckline simultaneously with stitching 1/4 ± 1/16 inch from raw edges.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 50	
	d. Turn shoulder seam allowance toward front yoke(s) and raise stitch through all plies with stitching 1/8 to 3/16 inch from joining seam.	301	LSq-2	10-14	50	50	
	e. Turn neckline seam allowance toward outer edge of collar and raise stitch 1/16 to 1/8 inch from folded edge.	301	LSq-2(b)	10-14	50	50	
	f. Stitch under collar to top collar-front yoke sub-assembly around periphery of under collar.	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14	50 50	50 50	
	g. Turn collar right side out and work out edges fully.	301	SSe-2(b)	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Hem bottoms of front and back yoke assembly.						
	Hems at bottoms of front and back yoke assembly shall be formed by folding edge back 1 inch, fold raw edge under 1/4 ± 1/16 inch and stitch 1/16 to 1/8 inch from folded edge. Hems shall finish 3/4 ± 1/8 inch wide.	301	EFb-1	10-14	50	50	
22.	Attach armhole facings to front and back yoke-collar assembly.						
	a. Position (face to face) edge of armhole facing on edge of armhole of front and back yoke with ends projecting equal distance beyond hems of yoke. Stitch along edges.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70	
	b. Turn facing to the inside and work out seam fully. Fold side edge under 1/4 ± 1/16 inch and ends fully under so that ends of facing are even with bottom edges of hems. Stitch across ends and along side edge with stitching 1/16 to 1/8 inch from the folded edges. Facing shall finish 1-1/8 ± 1/8 inches wide.	301	EFb-1	10-14	50	50	
	NOTE: As an option, operation 22b. may be omitted and the seaming be accomplished when attaching the hook fastener tape in operation 23.						
23.	Attach hook fastener tape to armholes of the front-back yoke assembly.						
	General Requirements						
	a. A 1 inch wide hook fastener tape shall be attached along the entire length of the yoke assembly armholes						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Attach hook fastener tape to armholes of the front-back yoke assembly. (cont'd)						
	on the facing. Tape(s) shall be attached with stitching along all sides and ends with stitch margin 1/8 ± 1/16 inch. Where edges overlap only the exposed edge need to be stitched down.						
	b. The tape edges shall be aligned with the edges of the armhole facing. If the optional method of attaching the facing specified in operation 22.b, is used, the edges and the ends of the facing shall be folded under as specified in operation 22.b. The fold under shall be caught in the stitching attaching the tape. The tapes and yoke shall finish without pleats or puckers.						
	c. In order to attach the tape so that it will lie flat without puckering, the following procedure shall be followed:						
	(1) Starting at bottom edge (hemmed) of yoke, stitch tape for a distance of approximately 5 inches. Cut across tape and overlap cut edges a sufficient amount to permit attaching of tape without puckering.	301		10-14	50	50	
	(2) Continue stitching along tape for an additional distance of approximately 3 inches. Cut across tape and spread cut edges apart (V is formed) a sufficient amount to permit attaching of tape without puckering.	301		10-14	50	50	
	(3) Continue stitching along tape for an additional distance of approximately 2 inches. Cut across tape and spread same as in (2) above. Tape should at this	301		10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Attach hook fastener tape to armholes of the front-back yoke assembly. (cont'd)						
	point be attached up to the shoulder joining seam of the combination top collar front yoke and the back yoke.						
	(4) Repeat operations (3), (2), and (1) above in the order listed.						
	(5) At each point where the tape was cut and spread apart (three places), cut a wedge shape piece of tape of sufficient size to overlap the cut edges of the tape. Stitch each piece all around.	301		10-14	50	50	
	d. The following method may be used as an alternate:						
	(1) Starting at bottom edge (hemmed) of yoke, stitch tape for a distance of approximately 4 inches. Cut across tape at an angle which will permit attaching of tape with minimum overlap to prevent puckering.	301		10-14	50	50	
	(2) Continue stitching along tape for an additional distance of approximately 3 inches. Cut across tape at an angle which will permit attaching of tape with minimum overlap to prevent puckering.	301		10-14	50	50	
	(3) Continue stitching along tape for an additional distance of approximately 3 inches to center of armhole facing. Cut across tape at an angle which will permit attaching of tape with minimum overlap to prevent puckering.	301		10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Attach hook fastener tape to armholes of the front-back yoke assembly. (cont'd)						
	(4) Repeat operations (3), (2), and (1) above in the order listed and cut across tape even with bottom edge facing. Continue stitching around periphery of tape with a row of stitching at each point of overlap.	301		10-14	50	50	
24.	Attach loop fastener tapes on front facings of the cover fronts.						
	Cut three each 1 ± 1/8 inch long 1 inch wide loop fastener tapes and position each one on front facing on left inside front of cover in locations shown on pattern, ± 1/8 inch. Stitch to cover along all edges of each piece, 1/8 ± 1/16 inch from edges.	301		10-14	50	50	
25.	Attach front closure loop tape on outer side of left front of cover.						
	For the front closure loop tape, cut a strip of 2 inches wide loop fastener tape to a length indicated on patterns, ± 1/8 inch. Position tape on the outer side of the left front of the cover in location shown on pattern, ± 1/8 inch. Stitch to front along sides and ends. Stitch 1/8 ± 1/16 inch from edges of tape.	301		10-14	50	50	
26.	Attach front closure hook fastener tape on inner side of right front of cover.						
	For the front closure hook tape, cut a strip of 2 inches wide hook fastener tape to a length indicated on patterns, ± 1/8 inch. Position tape on front facing on right inside front of cover in location	301		10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
26.	Attach front closure hook fastener tape on inner side of right front of cover. (cont'd) shown on pattern, ± 1/8 inch. (Location is shown on pattern for front piece.) Stitch to front along sides and ends. Stitch 1/8 ± 1/16 inch from edge of tape.						
27.	Join collar-yoke assembly to cover.						
	a. Position the edge of the undercollar of the collar yoke assembly on the neckline of the cover. Ends of collar shall start and terminate as indicated on front pattern. Stitch bottom pieces only of shoulder pad cover to neckline of cover (DO NOT CLOSE OPENING OF SHOULDER PAD COVER). Stitch top pieces only of shoulder pad cover to undercollar. Stitch undercollar to cover in three places - from end to undercollar to shoulder pad cover (both ends) and between the shoulder pad covers.	301	SSa-1	10-14	50	50	
	b. Stitch margin shall be not more than 1/4 inch from ends of undercollar to shoulder pad cover and 1/4 ± 1/16 inch for all other stitching. The lapel notch shall finish 1-1/8 ± 1/8 inches. The shoulder pad cover opening(s) shall be 4-1/4 ± 1/4 inches after completion of the stitching.						
	c. Top stitch along periphery of collar with stitching 3/16 ± 1/16 inch from outer edge.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
28.	Make two side straps.						
	All webbing components shall be cut in the required length and configuration as indicated by the patterns, ± 1/8 inch. All ends shall be fused. The bottom and top straps shall be assembled and stitched to the center strap in accordance with the strap shaper pattern. Attachment of the individual straps shall be in the position shown on the shaper pattern, ± 1/8 inch, and shall be attached to the same side of the center strap. All stitching shall be in accordance with the diagrams on the shaper pattern with stitch margins 1/8 ± 1/16 inch.	301		10-14	50	50	
29.	Attach side straps to armhole facing of cover, typical left and right.						
	a. With the inside surface of the bottom portion of the armhole facing facing up, position the center strap and the top straps on the facing. The center strap shall be centered, within 1/8 inch, on the armhole facing end joining seam with end of strap located 1-1/4 ± 1/8 inches from outer edge of facing. Stitch strap to facing using a box stitch pattern as shown on the strap shaper pattern. Stitch margin shall be 1/8 ± 1/16 inch.	301		10-14	50	50	
	or						
	In lieu of box stitch, bartack each edge of webbing and position another bartack 1/8 inch above bottom end of armhole facing. The bartacks shall be 3/4 to 7/8 inch long.	Bartack		38 per bartack	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
29.	Attach side straps to armhole facing of cover, typical left and right. (cont'd)						
	b. Position the left and right top straps on the facing with the distances between the straps and the center strap the same as on strap shaper pattern, ± 1/8 inch. Stitch straps to facing with diamond box stitch pattern as shown on pattern. Ends of straps shall be located 1 ± 1/4 inch from outer edge of facing.	301		10-14	50	50	
	or						
	In lieu of box stitch, bartack each edge of webbing and position another bartack 1/8 inch above bottom end of armhole facing. The bartacks shall be 3/4 to 7/8 inch long.	Bartack		38 per bartack	50	50	
30.	Make and attach two front straps.						
	a. Cut two straps from 1 inch wide nylon webbing in the following length, as applicable. Fuse the cut ends.						

Size	Length, ± 1/8 inch
X-Small and small/medium	16-1/2
Large/X-large	17-1/2

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
30.	Make and attach two front straps. (cont'd)						
	b. With the inside surface of the front part of the yoke facing up, position the end of the front strap on the front side edge with end of strap 1-1/4 ± 1/8 inches from bottom edge of yoke. Edge of strap shall be aligned with side edge of yoke. Stitch strap to yoke with box pattern. Stitch margins shall be 1/8 ± 1/16 inch.	301		10-14	50	50	
	or						
	In lieu of box stitch, bartack each strap with two 3/4 to 7/8 inch bartacks; one positioned parallel to and 1/8 inch from the top edge of webbing and the other positioned parallel to and 1/8 inch above the bottom end of armhole facing.	Bartack		38 per bartack	50	50	
31.	Make bartacks.						
	The cover shall be bartacked in the following locations with 3/8 to 1/2 inch long bartacks:	Bartack		28 per bartack	50	50	
	a. At the bottom end of the side seam(s) (vent opening), bartack horizontally across end of seam. Locate at end of seam, 1/8 ± 1/16 inch.						
	b. On the shoulder pad covers, at the end of each 1-1/8 inches opening (two places each cover), bartack through shoulder pad cover. Superimpose bartack over and along the top stitching. The size of each opening after bartacking shall be as specified in operation 9.c.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
31.	Make bartacks. (cont'd) c. At the intersection of the lapel notch and the collar, bartack vertically along edge of collar and onto the front of the cover. Approximately 1/2 of the length of the bartack shall be on the collar. d. Turn yoke inside out. At each end of the shoulder pad cover(s) opening, bartack through all plies of material. Position bartack on and along the neckline joining seam catching the end of shoulder pad cover. The shoulder pad opening after bartacking shall be as specified in operation 27.						
32.	Install female snap fasteners. Install six female snap fasteners in the following locations. The socket component shall be on the inside of the cover: (1) In four places on the bottom edge of the cover at the side vents, install fastener through hem in the location shown on the pattern, ± 1/8 inch. (2) In two places at the bottom of the left and right fronts, install fastener through the front and front facing in the location shown on the pattern, ± 1/8 inch.						
33.	Install male snap fasteners. Install two male snap fasteners on each side strap through webbing tapes in locations shown on pattern, ± 1/8 inch. Install one male snap fastener on each						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
33.	Install male snap fasteners. (cont'd) front strap through webbing tape, 5/8 ± 1/8 inch from the bottom center edge. Stud component shall face the female fastener, as worn.						
34.	Clean cover. a. Trim and remove all thread ends. b. Remove all spots and stains and all visible size markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. Finished measurements shall conform to table III.

TABLE III. Table of measurements (inches)

Size	X-Small	Small/Medium	Large/X-Large	Tolerance
1/2 Chest 1/	23	26-1/2	29-1/2	± 1
Length 2/	24	26-3/4	27-1/2	± 1
Attach cover tapes by attaching back yoke hook fastener tape to armhole loop fastener tape, snap straps on the side and front of cover to their finished position, close front and lay flat on table.				

1/ 1/2 Chest - Measure from the folded edge to folded edge of the cover in line with base of armhole.

2/ Length - Measure on a straight line along center of back from top edge of neck to bottom edge of cover.

3.9 Workmanship. The finished cover shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether construction details which cannot be examined in the finished product are in accordance with specified requirements. This inspection shall include verification that the working patterns conform to the Government patterns in all respects, that cut parts conform to the patterns, and that holes punched for snap fasteners conform to 3.3.2. Whenever nonconformance is noted, corrections shall be made to the items affected and lot in-process. Items which cannot be corrected shall be removed from production.

4.4.3 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of one cover. The sample unit shall be one cover. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 15.0 for total (major and minor combined) defects.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor
Cloth	Any hole (except drill hole), cut, or tear	101	
	Any exposed drill hole		201

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Cloth (cont'd)	Any abrasion marks, broken or missing yarns, or multiple floats	102	
	Any mend, darn, or patch	103	
	Not cut in accordance with pattern with respect to material directional requirements		202
	Any needle chew	104	
Fastener tape	Cut or tear	105	
	Hooks crushed effecting closure	106	
Webbing	Any hole, cut, tear, or frayed edge	107	
	Needle chew:		
	- Up to 1/8 inch in length		203
	- More than 1/8 inch in length	108	
	Ends not fused as specified		204
Hardware (general)	Broken or malformed failing to serve intended purpose, corroded area, burr, or sharp edge	109	
	Finish omitted or not as specified		205
Snap fasteners	Any fastener not functioning properly; i.e., fails to snap closed, provide a secure closure, or open freely	110	
	NOTE: The fasteners shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure.		
	Clinched excessively tight cutting adjacent material	111	
	Clinched loosely permitting any component to rotate freely but not to the degree that any component can be expected to become detached during use		206
	Clinched loosely to the degree that components can be expected to become detached during use	112	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine		Defect	Classification Major	Classification Minor
Snap fasteners (cont'd)				
	NOTE:	Incomplete roll of end of button or eyelet barrel is evidence of improper and insecure clinching.		
		Incorrect style	113	
		More than three splits in eyelet or button barrels		207
		Not located as specified exceeding tolerance		208
Open seams		Up to and including 1/2 inch		209
		More than 1/2 inch	114	
	NOTE:	A seam shall be classified as an open seam when one or more stitches joining a seam are broken or when two or more consecutive skipped or runoff stitches occur.		
Raw edges (except where required or otherwise classified herein)		More than 1/4 inch when securely caught in stitching		210
	NOTE:	Raw edges not securely caught in stitching shall be classified as open seams.		
Seam and stitch type		Wrong seam or stitch type	115	
		Seam pleated or excessively puckered, clearly noticeable		211
Stitch tension		Tension loose resulting in loose bobbin or top thread		212
		Tension excessively tight resulting in puckering of material		213
Stitches per inch (all types of stitching)		One stitch less than minimum specified 1/		214
		Two or more stitches less than minimum specified 1/	116	
		Two or more stitches in excess of maximum specified 1/		215

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Stitches per inch (all types of stitching) (cont'd)			
	NOTE: Variation in the number of stitches per inch caused by operator speeding up the machine and pulling the material in order to sew over heavy places, or in turning corners shall be classified as follows:		
	Within the minor defect classification - no defect.		
	Within the major defect classification - minor defect.		
Rows of stitching	Any row omitted	117	
Thread breaks, skipped stitches or run-offs (on type 301 stitching)	Overstitched less than 1 inch in each direction beyond defective area		216
Thread breaks, skipped stitches or run-offs (on overedge stitching)	Overstitched less than 3/4 inch in each direction beyond the defective stitching area		217
	NOTE: On all types of stitching, thread breaks or two or more consecutive skipped or run-off stitches not overstitched shall be classified as open seams.		
Bartacks	Any bartack omitted	118	
	Any bartack not as specified or not in specified location		218
	Loose stitching, incomplete or broken		219
	Length or width not within specified tolerance		220

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Stitching ends (on type 301 stitching)	Ends of stitching not secured as specified (except when caught in other stitching or turned under in a hem)		221
Assembly (general)	Any fastener tape reversed, i.e., loop tape attached where hook tape is required or visa versa	119	
	Incorrect width fastener tape utilized, i.e., 1 inch wide used in lieu of 2 inches wide	120	
	Any required opening on shoulder pad cover (two on outside and one where attached to neckline of cover) stitched closed	121	
	Any fabric component assembled with camouflage printed surface facing wrong direction	122	
	Any slot (vertical or diagonal) omitted	123	
Components and assembly	Any component caught in any unrelated operation of stitching (not otherwise classified herein)	124	
	Any component part omitted or not attached as specified (not otherwise classified herein)	125	
Label	Misplaced, missing, incorrect, or illegible	126	
Instruction sheet	Omitted, printing or figures illegible		222
Cleanness	Any spot or stain clearly noticeable		223
	Thread ends not trimmed throughout as specified		224

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Location of fastener tapes	Hook tape(s) on inside of cover under diagonal opening(s) not located as specified, exceeding tolerance:		
	- Up to 1/4 inch		225
	- By more than 1/4 inch	127	
	Location of tapes not otherwise classified herein not located as specified, exceeding tolerance		226
Grenade hangers	Not attached in location specified, exceeding tolerance		227
	Opening between bartacks:		
	- Less than 3/4 inch	128	
	- 3/4 inch to 7/8 inch		228
Shoulder pad cover(s)	Bottom piece of shoulder pad cover not centered on cover shoulder seam exceeding tolerance:		
	- Up to 1/4 inch		229
	- By more than 1/4 inch	129	
	Finished size of either opening on outer edge of cover or the opening at the neckline:		
	- Larger than specified, exceeding tolerance		230
	- Smaller than specified, exceeding tolerance up to 1/8 inch		231
	- Smaller than specified exceeding tolerance by more than 1/8 inch	130	
Lengths of webbing and fastener tape components	Any not as specified exceeding tolerance		232
Side straps	Any strap component not assembled in the required position, exceeding tolerance		233

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Slide straps (cont'd)	Any strap not attached to cover in the specified location, exceeding tolerance		234
Length of vertical and diagonal slots	Larger than specified, exceeding tolerance		235
	Less than specified, exceeding tolerance:		
	- Up to 1/8 inch		236
	- By more than 1/8 inch	131	
Front straps	Not located as specified, exceeding tolerance		237
Stitch margin or gage	Not within specified tolerance (to be scored when condition exists on major portion of seam)		238
Seam allowances and hems	Any seam allowance or hem not within specified tolerance		239
Lapel notch	Finished dimension not as specified exceeding tolerance		240

1/ Defects annotated shall be scored only when the condition exists for 3 inches or more or in several areas with an accumulated distance of 5 inches or more, applicable to individual seams.

4.4.4 End item dimensional examination. The end items shall be examined for the dimensions specified in table III. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of one cover. The sample unit shall be one cover. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling. Bulged or distorted container.
Content	Number of covers per shipping container is more or less than specified. 1/

1/ For this defect, one shipping container in the sample shall be examined.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each cover, with all straps and front closure secured in place, shall be neatly folded in quarters to measure approximately 12 inches by 9 inches. Each folded cover, together with an instruction sheet (see 3.2.7) shall be unit packed in a snug-fitting, flat style, clear polyethylene film bag conforming to A-A-50083.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. The covers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Forty-eight covers of one class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, two in length, two in width, and twelve in depth within a shipping container. Inside dimensions of each shipping container shall be 24-1/2 inches in length, 18-1/2 inches in width, and 15 inches in depth (± 1/8 inch). Each shipping container shall be closed in accordance with method III and reinforced as specified in the appendix of PPP-B-636 except the inspection shall be in accordance with 4.4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Forty-eight covers, of one class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, two in length, two in width, and twelve in depth within a shipping container. Inside dimensions of each shipping container shall be 24-1/2 inches in length, 18-1/2 inches in width, and 15 inches in depth (± 1/8 inch). Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636 except the inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Covers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), covers, packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 90 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag to permit ready identification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The cover is intended for use over the Ground Troops Fragmentation Protective Body Armor Vest to provide desert camouflage.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access of samples, address the contracting activity issuing the invitation for bids or request for proposal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

6.5 Supersession data. The class 1 desert camouflage pattern (6 color), cotton/nylon twill cover has been deleted as it is no longer required.

6.6 Subject term (key word) listing.

Desert camouflage
Ground troop
PASGT
Protection
Vest

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

(Project 8470-0149)

Review activities:

Army - MD
Navy - MC
Air Force - 82
DLA - CT

User activity:

Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.

COVER, DESERT PASGT VEST
INSTRUCTION SHEET FOR ATTACHING COVER TO VEST

WHEN YOU RECEIVE YOUR COVER . . .
MAKE SURE THAT IT IS FREE OF TEARS, CUTS OR OTHER DEFECTS
THAT COULD RENDER IT UNSERVICEABLE

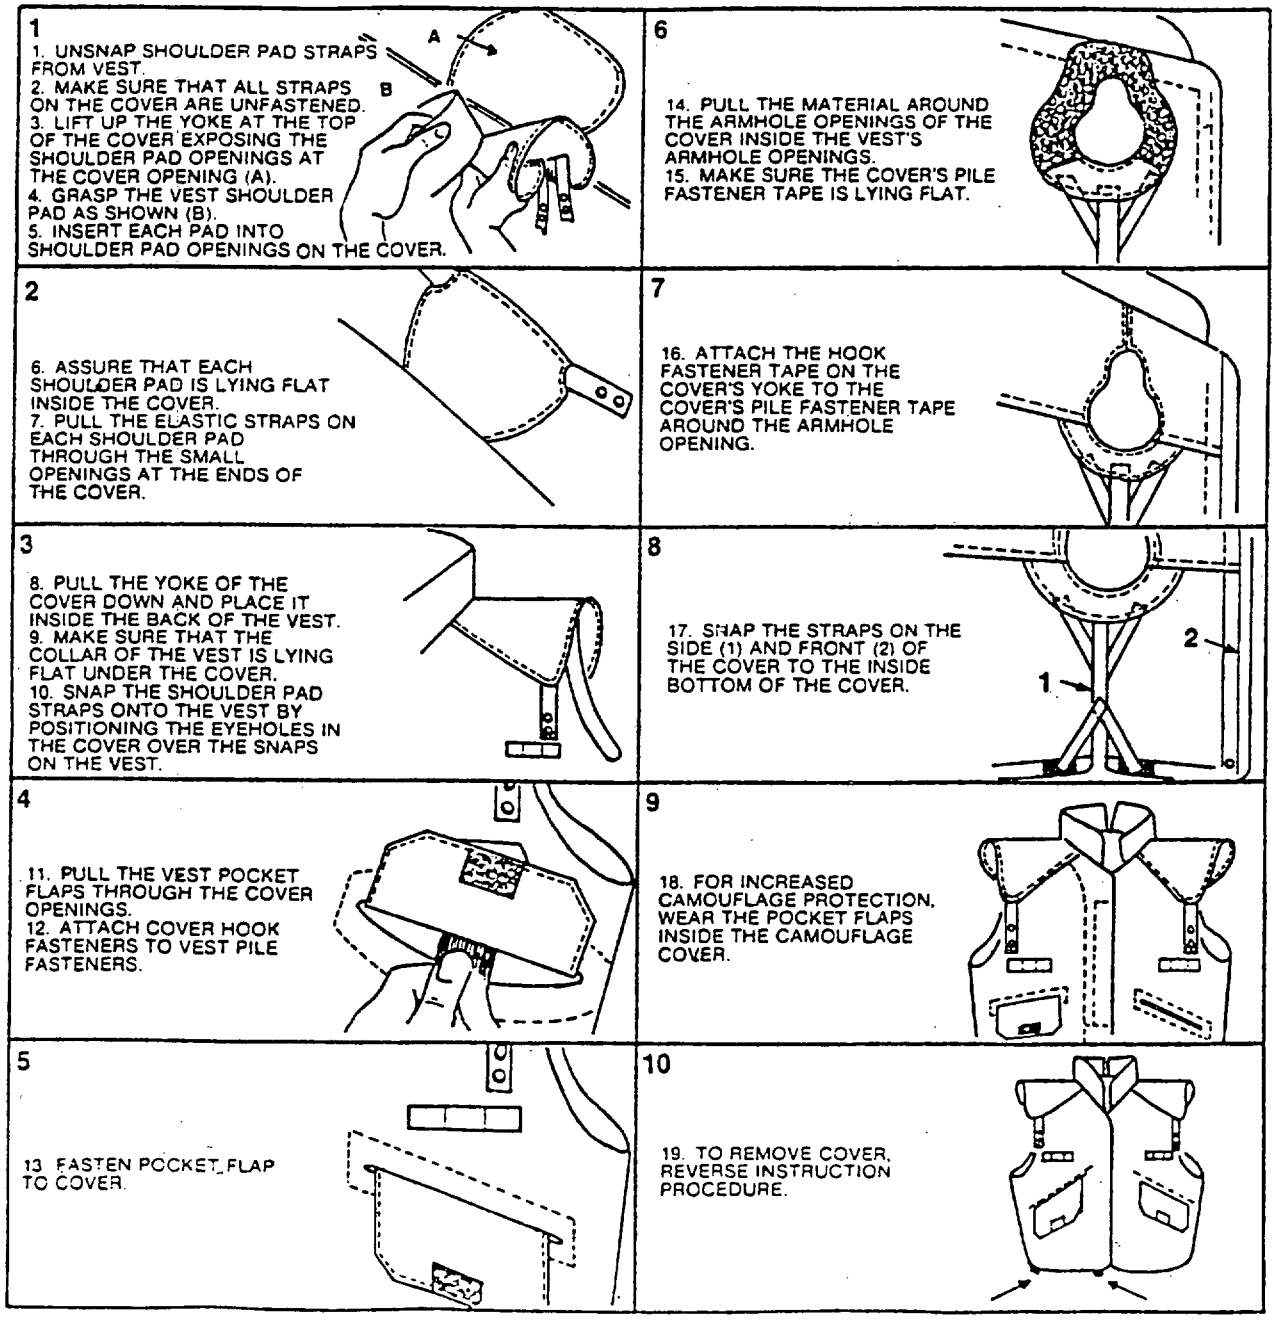


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:03Z
Check the source to verify that this is the current version before use.