FEDERAL STANDARD

FILMSTRIP, PHOTOGRAPHIC, SUPER 8 MILLIMETER, FORMAT FOR

Authority - This standard is issued pursuant to the Federal Property and Administrative Services Act of 1949, as amended, and its application to both super 8 millimeter filmstrips and equipment is mandatory on all Federal Agencies.

S1. Purpose and scope. This standard establishes the general requirements for dimensions of film and picture format of super 8 millimeter photographic filmstrip which have been adopted to achieve the highest degree of uniformity and standardization for the Federal Supply System.

S2. Application. Specifications and procurement documents for super 8mm filmstrip projectors, continuous loop projectors, film cartridges and cassettes, and associated super 8mm film handling equipment shall specify that all filmstrip equipment shall be compatible with super 8mm filmstrip conforming to the requirements of this standard.

S3. Applicable documents. The documents referenced below form a part of this standard to the extent specified herein. Unless otherwise specified, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American National Standards Institute, Inc., (ANSI) Publications:

PH22.31-1967 (R 1973)	Specifications for Motion Picture Safety Films.
PH22.56-1971	Nomenclature for Motion Picture Film Used in Studios and Processing Laboratories.
PH22.149-1967 (ISO 1700)	Dimensions for 8mm Motion Picture Film, Perforated Super 8, IR-1667.
PH22.154-1969	Dimensions of Projectable Image Area on Super 8 Motion Picture Film.
PH22.155-1967 (R 1973) (Agrees with ISO 1781)	Specifications for Projector Usage of Super 8 Motion Picture Film.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

S4. Definitions.

S4.1 Super 8mm filmstrip. A super 8mm film suitable for single frame or sequential scene projection which may be actuated by a separate tape sound track.

S4.2 Safe title area. In rear projection equipment, the safe title area is that area in which graphics will not be cut off by the mask surrounding the rear projection screen.

S4.3 Stop notch. A notch on the film which permits the film to be stopped at a preselected point.

S4.4 Other terms. Other terms, as applicable to the filmstrip, shall be as defined in ANSI PH22.56-1971.

S5. Standard characteristics.

S5.1 Film type. The film type shall be safety film as specified in ANSI PH22.31-1967.

S5.2 Format. Dimensions of film, picture format and orientation of the image area shall conform to the applicable provisions of the following ANSI standards: PH22.149-1967, PH22.154-1969 and PH22.155-1967.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:56Z
Check the source to verify that this is the current version before use.

S5.3 Safe title area. The safe title area shall be 83 percent of the projectable image, i.e. 3.33mm x 4.41mm (0.131 in x 0.173 in), centered within the projectable image.

S5.4 Length. The filmstrip length may be as short as 0.61 meter (2 feet) and as long as 15.24 meters (50 feet) and consist of as many as 3600 frames.

S5.5 Layout. The overall layout shall start at the FOCUS frame followed by a total of twenty-four OPAQUE frames, in turn followed by the first TITLE frame. The last PROGRAM frame shall contain the word END. Special instructions may be placed on the following frames (see figure 1).

S5.6 Focus frame. The focus frame shall contain a design to permit sharp focus on the screen.

S5.7 Stop notch. The dimensions of the stop notch shall be as shown in figure 2. Stop notches shall be appropriately placed as required by the program. The initial stop notch shall be five frames after the FOCUS frame.

S5.8 Leader. An opaque leader of approximately 150mm (6 inches) shall be provided before the FOCUS frame.

S5.9 Trailer. An opaque trailer of approximately 150mm (6 inches) shall be provided after the last PROGRAM frame.

S6. Changes. When a Federal agency considers that this standard does not provide for its essential needs, written request for changing or adding to the standard, supported by adequate justification, shall be sent to the Administration. This justification shall explain wherein the standard does not provide for essential needs. The request shall be sent in duplicate to the General Services Administration, Federal Supply Service, Mechanical and Electrical Division, Washington, DC 20406. The Administration will determine the appropriate action to be taken and will notify the agency.

S7. Conflict with referenced documents. Where the requirements stated in this standard conflict with any requirement in a referenced document, the requirements of this standard shall apply. Nature of conflict between the standard and referenced document shall be submitted in duplicate to the General Services Administration, Federal Supply Service, Mechanical and Electrical Division, Washington, DC 20406.

S8. Supersession data. This standard supersedes Military Standard MIL-STD-1854A, 11 April 1975.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:56Z
Check the source to verify that this is the current version before use.

Military Custodians:

Army - EL
Navy - AS
Air Force - 70

User Activities:

Army - MI, AV
Navy - TD

Preparing Activity:

GSA - FSS

Civil Agency Coordinating Activities:

Commerce
CSC
DOT
EPA
Energy Research Dev. Adm.
FCC
GSA - FSS
HEW
HUD
Interior
Justice
Labor
NASA
Small Business Adm.
State
Treasury - IRS
USIA
USDA
VA

This document is available from the General Services Administration (GSA), acting as an agent for the Superintendent of Documents. A copy for bidding and contracting purposes is available from GSA Business Service Centers. Copies are for sale at the GSA, Specification Sales, Building 197 (Washington Navy Yard), Washington, DC 20407 for 30 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:56Z
Check the source to verify that this is the current version before use.

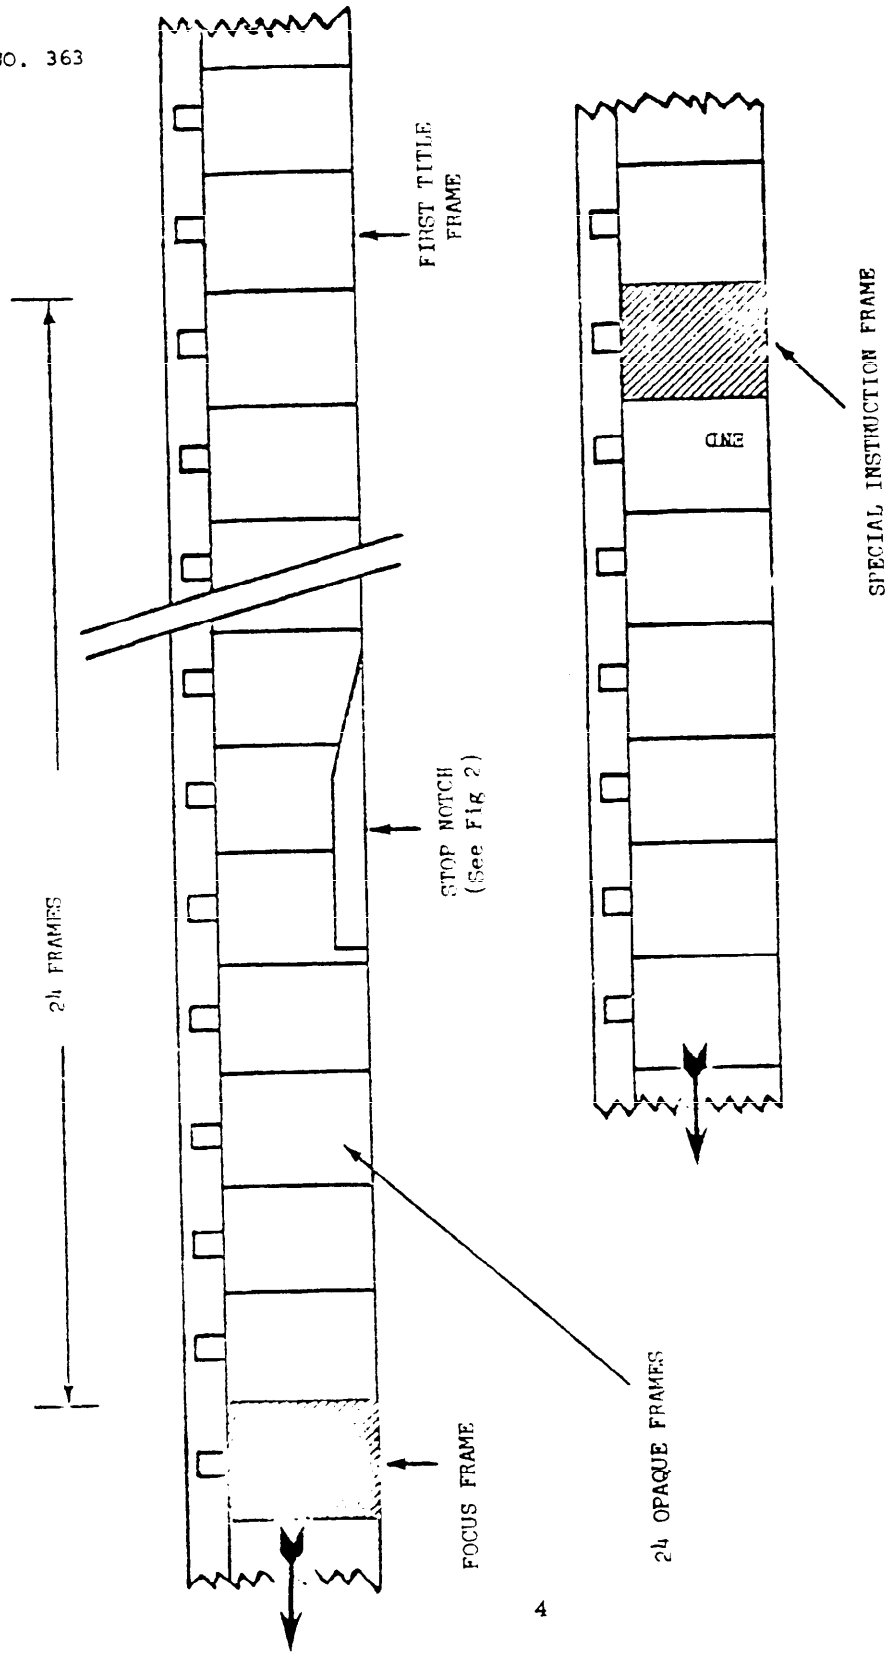


FIGURE 1. FILMSTRIP LAYOUT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:56Z
Check the source to verify that this is the current version before use.

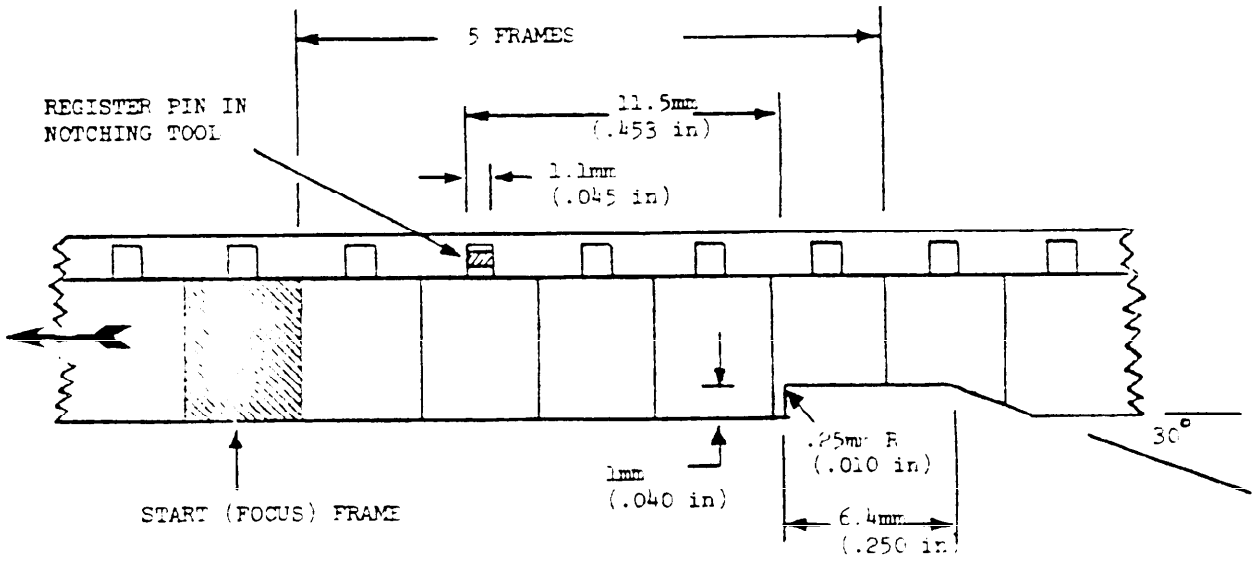


FIGURE 2. STOP NOTCH DETAIL FOR SUPER 8MM FILM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:56Z
Check the source to verify that this is the current version before use.