MIL-C-60104A(MU)
AMENDMENT 3
7 October 1968
SUPERSEDING
AMENDMENT 2
24 May 1968

MILITARY SPECIFICATION

CONTAINERS, SHIPPING, REUSABLE: 8246020 AND 10539215

This amendment forms a part of Military Specification MIL-C-60104A(MU), dated 10 August 1967.

Paragraph 2.1: Add the following drawings:

"A10555906	Primer, Silicone Adhesive
B10555904	Adhesive, Silicone
C10556000	Latch, Assembly"

Paragraph 3.3.2.2: Delete in entirety and substitute the following:

* "3.3.2.2 Extrusion attachment.- The sealing extrusions shall be attached to the container shells with an air curable adhesive sealant, conforming to Drawing B10555904 and Primer Drawing A10555906. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and a pressure-tight joint. Minimum cure time for sealant is twenty-four (24) hours."

Paragraphs 3.3.3 and 3.3.3.1: Delete in entirety and substitute the following:

"3.3.3 Latches.- Twelve (12) latches conforming to Drawing C10556000 shall be located and secured to lower sealing extrusion as shown on Figure 1. The latch incorporates a spring detent in the base plate which engages into provided offset in sealing extrusion when the latch is positioned into the extrusion rail. Stake the extrusion rail in two (2) places to prevent lateral movement of latch base plate. Each latch shall be properly adjusted and cotter pinned to assure uniform pressure on sealing gasket. Touch-up paint shall be applied to stake marks with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.3.3.1 Latch finish.- Latches shall be finished prior to assembly to container by Finish No. 21.3 of MIL-STD-171. Top coat paint color shall be X24087 of FED-STD-595."

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

Paragraph 3.5: Delete in entirety and substitute the following:

"3.5 Marking.- Marking legends shown on Figure 1 shall be applied by silk screen or stencil with paint conforming to TT-E-529, Color White 27875 of FED-STD-595."

Delete: "Figure 1" and substitute attached "Figure 1".

Delete: "Figure 3" and substitute attached "Figure 3".

* Delete: "Figure 4" and substitute attached "Figure 4".

* The outside margins have been marked to indicate where additions or deletions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A104

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

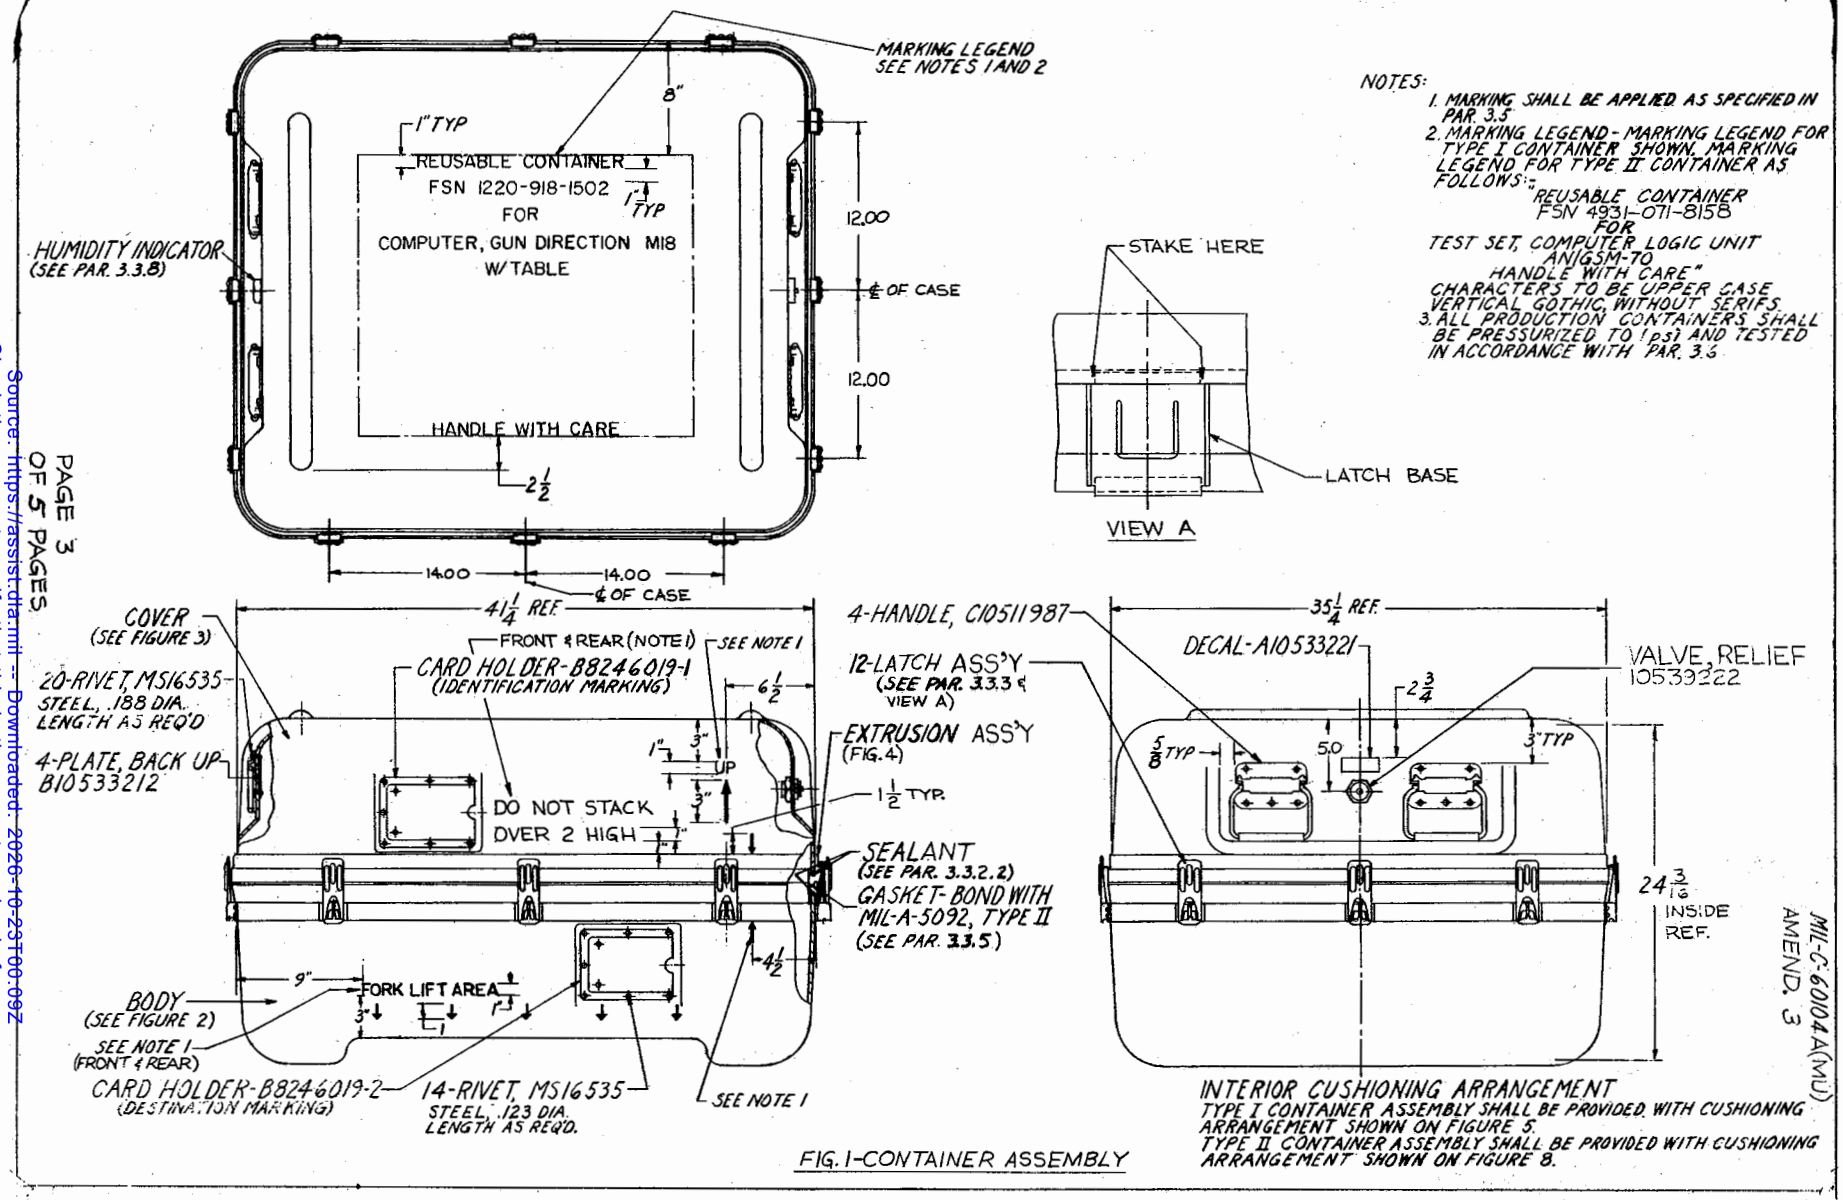


FIG. 1-CONTAINER ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

NOTES:
1. ALL PRODUCTION SHELLS SHALL BE INTERCHANGEABLE WITHIN .06 AND FIT FIG. 4
2. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2.
STARTING THICKNESS .375±.010
COLOR-OLIVE DRAB COLOR-X24087 OF FED-STD-595
FINISH-HAIRCELL GRAIN EXTERIOR, SMOOTH INTERIOR
* FORMED THICKNESS MEASURED TOP PORTION .160±.020
3. TOLERANCE UNLESS OTHERWISE SPECIFIED:
DECIMALS .X=±.06, .XX=±.03
ANGLES ±1°0'

SUGGESTED MATERIAL SOURCE:
U.S. RUBBER CO.
CHICAGO, ILL.
PART NO. R40-4313-CPA 1492



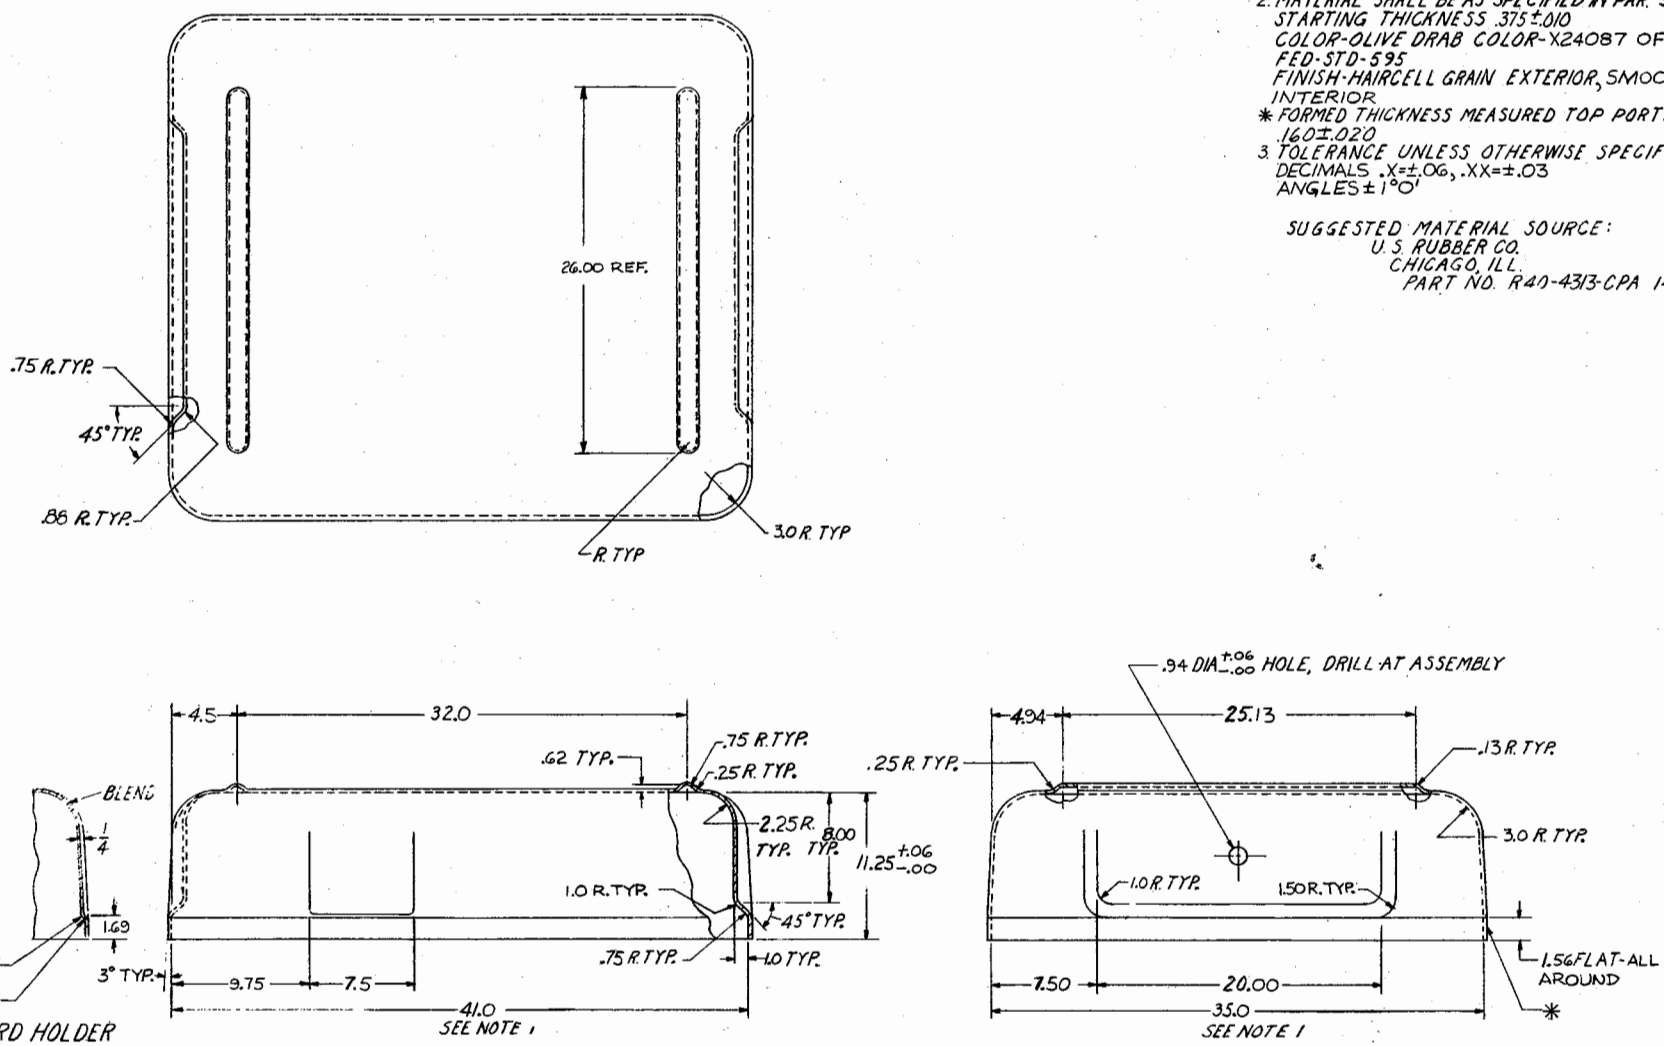


FIG. 3-COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

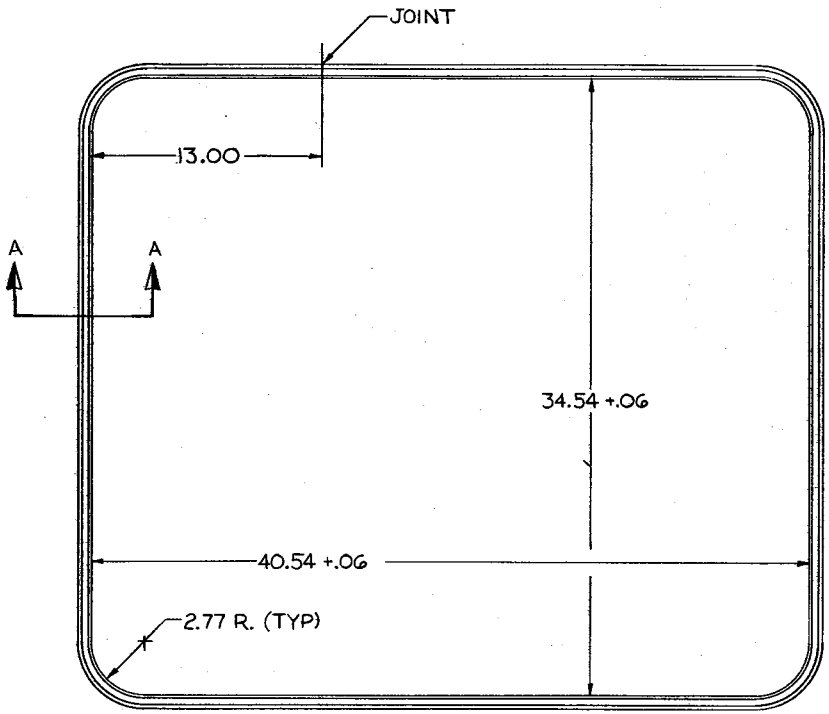

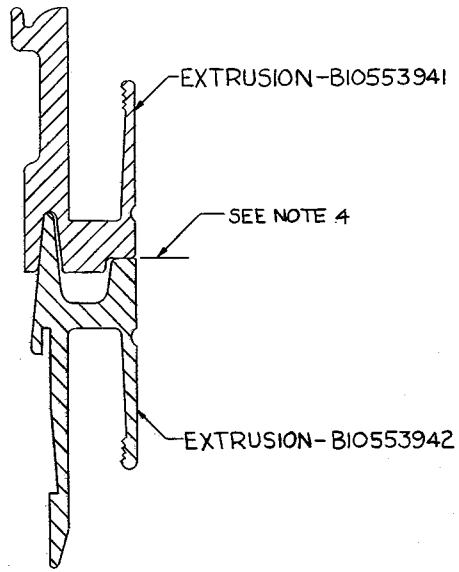

PARTIAL SECTION A-A
(TYPICAL)

NOTES:

1. COMPLETED EXTRUSIONS SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN TYPICAL SECTION A-A.
2. MUST MATCH SHELLS (FIGS. 2 & 3).
3. EXTRUSIONS SHALL BE FORMED, WELDED, AND FINISHED IN ACCORDANCE WITH PARA. 3.3.2 AND 3.3.2.1.
4. SURFACE SHOWN SHALL BE FLAT WITHIN .020 INCHES T.I.R. IN ANY 6 INCHES OF LENGTH AND .030 INCHES T.I.R. OVER ENTIRE LENGTH OF ANY SIDE OR END.

FIG. 4 - EXTRUSION ASSEMBLIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.