INCH-POUND
MIL-C-11015/32C
25 October 2021
SUPERSEDING
MIL-C-11015/32B
14 May 2001


MILITARY SPECIFICATION SHEET


CAPACITOR, FIXED, CERAMIC DIELECTRIC (GENERAL PURPOSE), (FEED-THRU), STYLE CK99

INACTIVE FOR NEW DESIGN AFTER 31 MARCH 1999.
FOR REPLACEMENT PURPOSES ONLY.
SEE TABLE II FOR SUBSTITUTION INFORMATION.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-11015.

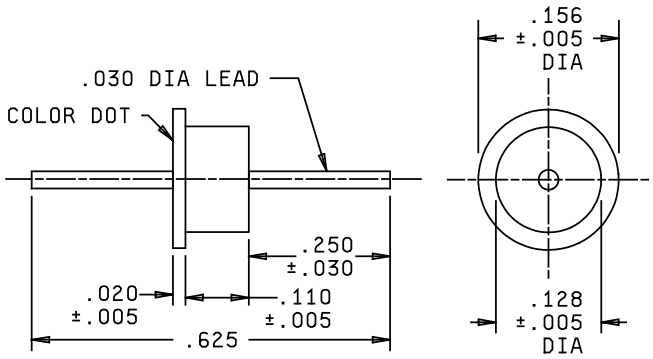



CIRCUIT DIAGRAM

Inch	mm	Inch	mm
.005	0.13	.128	3.25
.020	0.51	.156	3.96
.030	0.76	.250	6.35
.110	2.79	.625	15.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 inch (0.38 mm).

FIGURE 1. Style CK99 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Case type: Feed-through (solder mount). Solder used internally shall have a minimum melting point of +280°C.

Capacitance value: See table I.

Capacitance tolerance: ± 20 percent (M).

Rated temperature: -55°C to +125°C.

Rated voltage: See table I.

TABLE I. Style CK99 characteristics.

Part or identifying number (PIN)	Capacitance value (pF)	Rated voltage (V_{dc})	Color dot
CK99BW101M	100	200	Green
CK99BW501M	500	200	Brown
CK99BW122M	1,200	200	White
CK99BW272M	2,700	100	Red
CK99BW502M	5,000	50	Yellow

Dielectric withstanding voltage (DWV): In accordance with MIL-C-11015.

Dielectric:

Test voltage: 200 percent of dc rated voltage applied between the terminal and the mounting flange..

Body insulation: Not applicable.

Barometric pressure (reduced): In accordance with MIL-C-11015 and MIL-STD-202-105, condition C (70,000 feet).

Test potential: 200 percent of dc rated voltage applied between the terminal and the mounting flange.

Insulation resistance (IR): In accordance with MIL-C-11015 and MIL-STD-202-302, condition B, or rated voltage, whichever is less, 500 megohms, minimum, measured between the terminal and the mounting flange.

Dissipation factor (DF): 5.0 percent, maximum.

Shock (specified pulse): In accordance with MIL-C-11015 and MIL-STD-202-213, condition A (50 g's).

Vibration, high frequency: In accordance with MIL-C-11015 and MIL-STD-202-204, condition D (20 g's).

Mounting: Capacitors shall be rigidly mounted by the body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:58Z
Check the source to verify that this is the current version before use.

Thermal shock and immersion: In accordance with MIL-C-11015.

IR: 50 megohms, minimum.

Salt atmosphere (corrosion): In accordance with MIL-C-11015 and MIL-STD-202-101, condition A.

Terminal strength: Not applicable.

Moisture resistance: In accordance with MIL-C-11015.

IR: 50 megohms, minimum.

ΔCap.: Within ± 10 percent of initial measurement.

Solderability: In accordance with MIL-C-11015; 2 terminals.

Resistance to soldering heat: In accordance with MIL-C-11015.

Voltage-temperature limits: In accordance with MIL-C-11015 (symbol BW).

Life (at elevated ambient temperature): In accordance with MIL-C-11015.

Test potential: 200 percent of rated voltage.

IR: 100 megohms, minimum (at +85°C); 250 megohms, minimum (at +25°C).

DF: 8.0 percent maximum (at +25°C).

Marking: Capacitors shall be marked as shown on figure 1. See table 1 for color code. The PIN, capacitance, voltage, and the manufacturer's code or symbol shall be marked on the package container.

Supersession data: For new design, units from Military Specification, MIL-PRF-28861/12 should be used as specified in table II.

TABLE II. Supersession data.

Inactive PIN	Superseding Specification Sheet	Superseding PIN
CK99BW101M	MIL-PRF-28861/12	M28861/12-012GB
CK99BW501M	MIL-PRF-28861/12	M28861/12-014GB
CK99BW122M	MIL-PRF-28861/12	M28861/12-016GB 1/
CK99BW272M	MIL-PRF-28861/12	M28861/12-004GB
CK99BW502M	MIL-PRF-28861/12	M28861/12-006GB

1/ PIN CK99BW122M has a capacitance of 1,200 pF. PIN M28861/12-016GB has a capacitance of 1,000 pF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:58Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-C-11015, this document references the following:

MIL-PRF-28861/12
MIL-STD-202-101
MIL-STD-202-105
MIL-STD-202-204
MIL-STD-202-213
MIL-STD-202-302

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Air Force - 85
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2021-036)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T14:58Z
Check the source to verify that this is the current version before use.