MIL-L-11025F
27 May 1987
SUPERSEDING
MIL-L-11025E
18 June 1975

MILITARY SPECIFICATION

LEAD, PILE-DRIVER; WITH CATWALK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers pile driving leads, catwalks, and boom adapter plates compatible with cranes in military use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards, form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-P-514	- Plates, Identifications, Instructions and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3815

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:00Z
Check the source to verify that this is the current version before use.

MIL-C-3580 - Cranes and Crane-Shovels, Truck, Crawler, and Wheel Mounted, Full Resolving, and Their Attachments, Packaging of.

MIL-C-46168 - Coating Aliphatic Polyurethane, Chemical Agent Resistant.

STANDARDS

MILITARY

MIL-STD-130 - Identification Marking of US Military Property.

MIL-STD-889 - Dissimilar Metals.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

OSHA Standard 29 CFR, Section 1926.500(b) - Floor and Wall Openings, and Stairways.
OSHA Standard 29 CFR, Section 1910, Subpart D, paragraphs 1910.22, 1910.23, 1910.24 and 1910.27 - Walking/Working Surfaces.
OSHA Standard 29, CFR, Section 1910, Subpart E, paragraph 1910.37 - Means of Egress.

(Application for copies should be addressed to: Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

DRAWINGS

ME

TA13207E7680 - Lead, Pile-Driver Assembly.

(Copies of specifications, standards, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein, Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DoDISS specified in the solicitation Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the non-Government documents which is current on the date of the solicitation

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Code, Section IX, Welding Qualifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:00Z
Check the source to verify that this is the current version before use.

(Applications for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN WELDING SOCIETY, INC. (AWS)

D1.1 - Structural Welding Code, Steel.

(Application for copies should be addressed to the American Welding Society, Inc., 550 NW LeJeune Road, PO Box 351040, Miami, FL 33126.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specifications sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The pile-driver leads shall be in accordance with Top Assembly TA13207E7680 and as specified herein. The pile-driver leads shall consist of a top section, one or more lower sections, adapter plates, and a cat-walk assembly. These items may be procured separately, and the items required shall be as specified (see 6.2).

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or designated representative.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of pile-driver lead assembly and catwalk assembly from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish pile-driver lead assembly and catwalk assembly conforming to this specification.

3.3 Material. Material shall be as specified herein and on the applicable drawings.

3.4 Lead sections.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:00Z
Check the source to verify that this is the current version before use.

3.4.1 Top section. Top lead sections shall conform to TA13207E7680. Each top section shall be furnished with capscrews, lockwashers, and nuts for attaching the pile-driver adapter plates.

3.4.2 Lower section. Lower lead sections shall conform to TA13207E7680. Each lower section shall be furnished with capscrews, lockwashers, and nuts for attaching the lower section to the top section.

3.5 Adapter plates. Adapter plates shall conform to TA13207E7680, except that when specified (see 6.2), adapter plates shall conform to figure 1 and shall be comparable with the manufacturer's make, size, and model of the crane boom with which the pile-driver assemblies to be used. Figure 1 adapter plate material shall conform to TA13207E7680 adapter plate material.

3.6 Catwalk. The catwalk assembly shall conform to TA13207E7680. Each catwalk assembly shall be furnished with capscrews, bolts, lockwashers, and nuts for assembling the catwalk and attaching to the lower lead section and crane.

3.7 Treatment and painting. The portions of the top and lower pile-driver lead sections, adapter plates, catwalk assembly, and their components normally painted, both internally and externally, shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified (see 6.2) top coat color shall be camouflage green 383 conforming to MIL-C-46168.

3.8 Identification marking. The top and lower pile-driver lead sections, adapter plates, and catwalk assembly shall be identified in accordance with MIL-STD-130. The marking shall be applied to the top and lower pile-driver lead sections, adapter plates, and catwalk assembly on plates conforming to MIL-P-514, type I, style 4, composition c of type I, grade A, class 1 material. Plates shall be attached by screws, bolts, or rivets in a conspicuous, protected location.

3.9 Workmanship. All parts, components, and assemblies of the pile-driver leads and catwalks-shall be free from defects such as incomplete welds, rust, cracks, kinks, sharp bends, and other defects that could impair the operation or serviceability of the pile-driver leads.

3.9.1 Steel fabrication. All bends and forming of material shall be done by methods that will not cause injury to the steel. Shearing and chipping, when required, shall be done neatly and accurately. Corners shall be square and true, and all sharp edges and burrs shall be removed. Flame-cutting may be employed instead of shearing or sawing. Burned surfaces of flame-cut material shall be ground or machined to remove ash and cooling checks. Precautions shall be taken to prevent overheating, and heated steel shall be allowed to cool slowly. All bends of a major character shall be made with steel dies or fixtures to insure uniformity of size and shape.

3.9.2 Bolted connections. Boltholes shall be accurately formed and drilled, and burrs and sharp edges shall be removed. All bolts, nuts, and screws shall be tight. Adjoining surfaces shall be flat and in full contact with each other.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:00Z
Check the source to verify that this is the current version before use.

3.9.3 Material deterioration prevention and control. The top and lower pile-driver lead sections adapter plates, and catwalk assembly shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the top and lower pile-driver lead sections adapter plates, and catwalk assembly may be exposed.

3.9.4 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.9.5 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.9.6 Recovered materials. For the purpose of this requirement, recovered materials are those which have been collected from solid wastes and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the pile-driver leads, adapter plates or catwalk assembly may be newly fabricated from recovered materials to the maximum extent practicable, provided they meet all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the pile-driver leads, adapter plates or catwalk assembly.

3.9.7 Welders and welding.

3.9.7.1 Welders. Before assigning any welder or welding operator to manual welding work covered by this specification, the contractor shall obtain certification that the welder or welding opreator has passed qualification tests as prescribed by either of the following listed codes for the type of welding operation to be performed and that such qualification is effective as defined by the particular code:

AWS D1.1, Structural Welding Code - Steel,
ASME Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

Certification shall be made available for review by the contracting officer or designated representative. The Government reserves the right to require recertification of any welder or welding operator.

3.9.7.2 Welding. The surface of parts to be welded shall be free from scale, paint, grease, and other foreign matter. When multiple layers of weld metal are required, each layer shall be thoroughly cleaned before depositing another layer. All welded parts and assemblies shall be free from cracks and other imperfections that may reduce the effectiveness of the part or assembly. All weldments shall be free from slag, flux, weld spatter, and other impurities. Work shall be positioned for flat welding whenever practicable No undercuts or overlays will be permitted on any weldment. Butt-type joints having members of

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:00Z
Check the source to verify that this is the current version before use.

equal thickness shall ‘be aligned within 10 percent of the thickness of the members involved. Where different steels are welded to each other, filler metal having strength of the lower strength steel shall be used. When the same steels, or steels having similar properties are used, the deposited filler metal shall develop the full design strength of the particular weld joint or weldment.

3.10 Mechanical properties. Mechanical properties of all welds shall be such that welds will transmit stress without failure or permanent deformation and have a strength equivalent to the parent material.

3.11 Machine work. Tolerances and gages for metal fits shall conform to the limitations specified in TA13207E7680. All holes shall be countersunk before tapping.

3.12 Interchangeability. All like components shall be interchangeable with respect to installation, performance, and quality.

3.13 Safety. The catwalk assembly shall be equipped with dual detachable guardrails, toeboards and non-slip surfaces and should otherwise meet the applicable provisions of the Occupational Safety & Health Act, Title 29 of the Code of Federal Regulations, Sections 1910, Subparts D&E, 1910.22, 1910.23, 1910.24, 1910.27, 1910.37 and Section 1926, 1926.500(b). The construction of the catwalk assembly shall also meet all other OSHA 29 CFR 1926 requirements for pile driving equipment. These safety related features shall be designed and fabricated to meet all requirements stipulated in federal law and applicable to the general public. These features shall be compatible and interface with structural details of the crane and pile driver leads.

4* QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor’s overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. Inspections shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:00Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article pile-driver lead assembly and catwalk sections shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Test. The first article pile-driver lead assembly and catwalk sections shall be tested as specified in 4.5.2. Failure of this test shall be cause for rejection.

4.4 Quality conformance inspection. Each pile-driver lead section and catwalk section shall be examined as specified in 4.5.1, Presence of one or more defects shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The pile-driver lead top sections, lower sections, adapter plates, and catwalk sections shall be examined for the following defects:

101. Dimension not as specified.
102. Size or location of holes not as specified.
103. Identification marking missing, illegible, or incorrect
104. Treatment and painting not as specified.
105. Color not as specified.
106. Materials not as specified.
107. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable stroage and operating environments.
108. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.
109. Contractor does not have documentation available for identification of material, material finishes, or treatment.
110. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the pile-driver leads, adapter plates or catwalk assembly.
111. Members containing rust, cracks, kinks, Or sharp bends.
112. Workmanship on sections or assemblies not as specified.
113. Parts and components missing or not as specified.
114. Safety requirements not met as specified.

4.5.2 Test. The components for a 55-foot pile-driving lead and catwalk assembly shall be assembled, erected, and attached to a crane boom, simulating the required procedure of setting up for actual pile-driving operations. After erection of the pile-driving leads and catwalk assembly, the unit shall be checked for cash of assembly, alinement, and fit. Interference of mating members, improper fit at joints, or nonconformance to 3.12 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:00Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging. The preservation, packing, and marking shall be examined and tested to determine compliance with Quality Assurance Provision of MIL-C-3580.

5. PACKAGING

5.1 preservation, packing, and marking. The pile-driver leads, catwalks, adapter plates, and technical publications shall be preserved, packed, and marked in accordance with MIL-C-3580, either boxed or unboxed as specified (see 6.2). The level of preservation and packing shall be level A, B, or C, as specified (see 6.2).

6. NOTES

6.1 Intended use. The pile-driver lead and catwalk assembly is intended to be used in conjunction with drop hammers weighing up to 300 pounds, and with diesel hammers weighing up to 12,000 pounds.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Items required (see 3.1).
c. Time frame required for submission of first article or when a first article is not required (see 3.2 4.3, and 6.3).
d. When adapter plate sets shall conform to figure 1 and the make, models and size of crane boom with which the pile-driving assembly is to be used (see 3.5).
e. Color required when other than as specified (see 3.7).
f. Level of preservation and level of packing required (see 5.1).
g. Whether boxed or unboxed shipment is required (see 5.1).

6.3 First article. When a first article inspection is required, the items should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article.

6.4 Subject term (key word) listing.

Catwalk, pile driver
Pile driver lead
Pile driving
Piles

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:00Z
Check the source to verify that this is the current version before use.

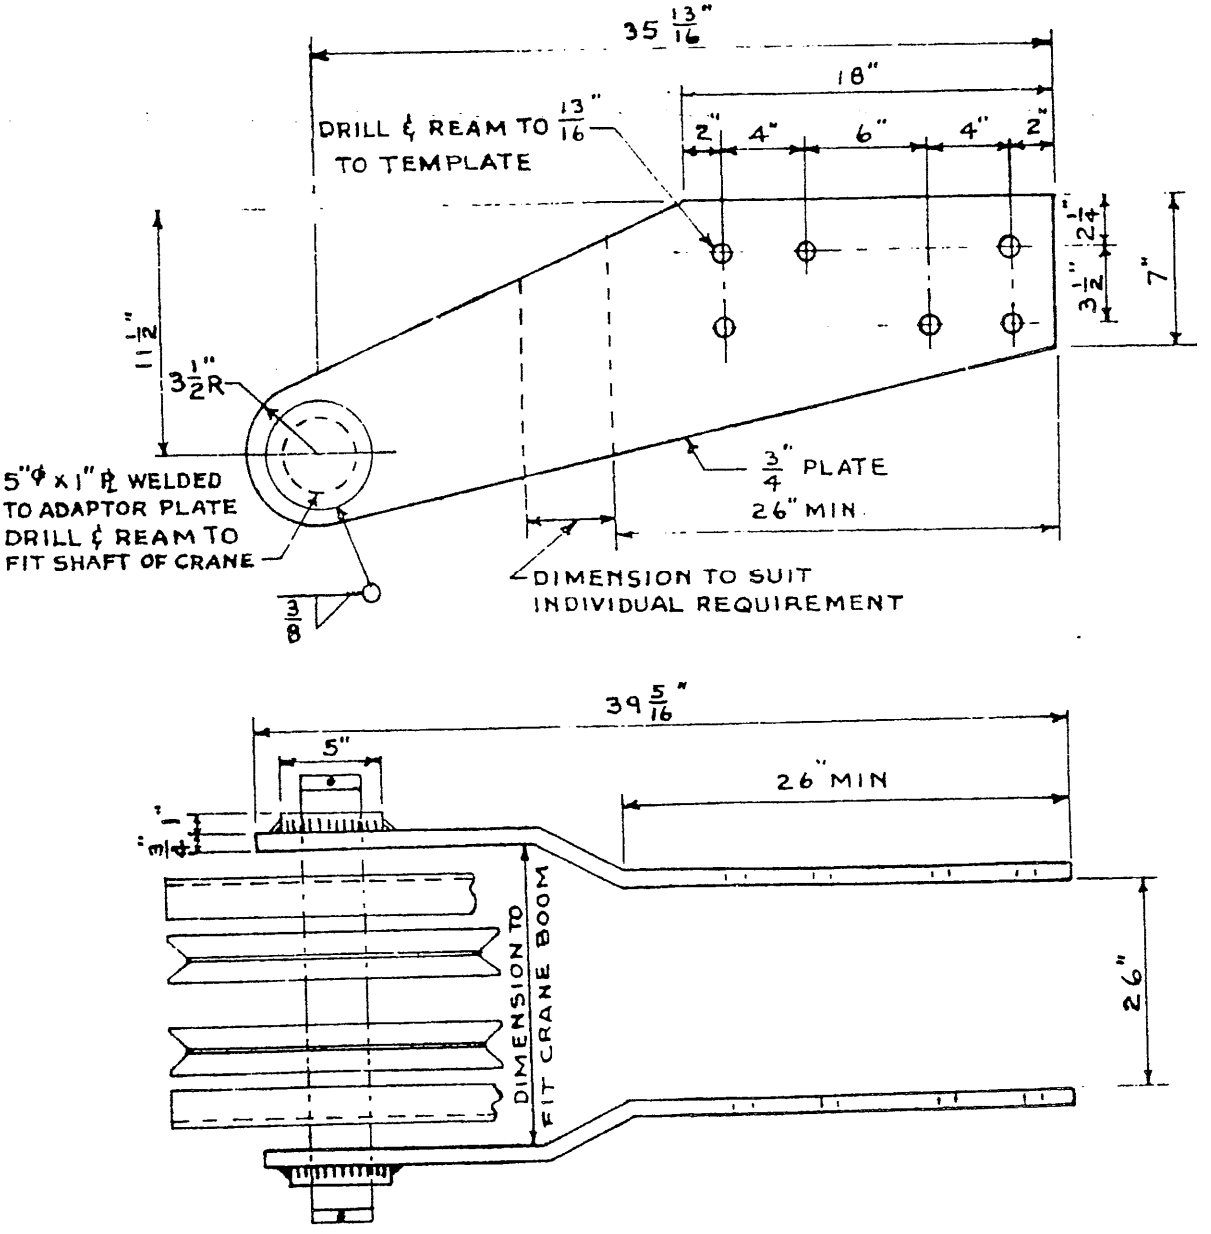


Figure 1. Pile driver lead adapter. X-1686

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:00Z
Check the source to verify that this is the current version before use.

;TRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in mitting comments and suggestions for improvements. All users of military standardization documents are invited to provide gestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and led. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the blems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an nowledgement will be mailed to you within 30 days to let you know that your comments were received and are being sidered.

TE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of cification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

PARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

FICIAL BUSINESS
NALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research & Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Includ Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17 15:00Z
Check the source to verify that this is the current version before use.