MIL-N-38439A(USAF)
7 September 1966
SUPERSEDING
MIL-N-38439 (USAF)
6 October 1965

MILITARY SPECIFICATION

NOZZLE, WATER HOSE, SERVICING, AIRCRAFT GRK-14/S32A-2

1. SCOPE

1.1 This specification covers a demineralized water servicing nozzle, designated GRK-14-S32A-2.

2. APPLICABLE DOCUMENTS

*2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

TT-S-735	Standard Test Fluids, Hydrocarbon

Military

MIL-H-775	Hose, Rubber or Fabric (Including Tubing); and Fittings, Nozzles and Strainers, Packaging
MIL-C-5424	Cable, Steel (Corrosion-Resisting), Flexible, Preformed (For Aeronautical Use)
MIL-R-25897	Rubber, High-Temperature, Fluid-Resistant

STANDARDS

Military

MIL-STD-100	Engineering Drawing Practices
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence For The Selection Of
MIL-STD-810	Environmental Test Methods For Aerospace And Ground Equipment
MIL-STD-831	Test Reports, Preparation Of
MS25384	Jumper, Fuel Nozzle-To-Aircraft
MS33586	Metals, Definition Of Dissimilar

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 4930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposal shall apply.

National Bureau of Standards

Handbook H28 Screw-Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office Washington 25, D.C.)

American Standards Association

Standard H35.1 (1962 issue) Alloy And Temper Designation Systems For Wrought Aluminum

(Applications for copies should be addressed to the American Standards Association, Incorporated, 10 East 40th Street, New York 16, New York.)

3. REQUIREMENTS

3.1 Preproduction. This specification makes provisions for preproduction testing.

3.2 Components. The nozzle shall consist of the following major components.

Description	See Requirement
Body	3.7.1
Valve	3.7.2
Operating lever	3.7.3
Spout	3.7.4

3.3 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.4 Materials

3.4.1 All metallic parts of the nozzle shall be fabricated from 300 series stainless-steel or aluminum. Aluminum casting alloys shall be limited to types B214 and 356. All other aluminum parts shall be fabricated of alloys other than 2000, 4000, and 7000 series in accordance with ASA Standard H35.1.

3.4.2 Fungusproof materials. Materials that are not nutrients for fungi shall be used to the greatest extent practicable. Where materials that are nutrients for fungi must be used, such materials shall be treated with a fungicidal agent.

3.4.3 Demineralized water and petroleum products. The materials used in the construction of the nozzle shall neither affect nor be affected by demineralized water and petroleum products.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:37Z
Check the source to verify that this is the current version before use.

3.5 Design and construction. The nozzle shall be so designed and constructed that no parts will work loose in service. It shall be built to withstand the stresses, jars, vibrations, and other conditions incident to shipping, storage, installation, and flight line service.

3.5.1 Functional design. The nozzle shall be so designed that it can be attached to the outlet hose on an AF/S32A-2 2,600-gallon water truck. It shall have the capability to service demineralized water to KC-135 and C-135 aircraft.

*3.5.2 Operating life. The nozzle shall be designed for an operating life of 5,000 cycles. A cycle shall consist of opening and closing the nozzle while pumping at a minimum flow rate of 50 gpm.

*3.5.3 Maintainability. The nozzle shall be designed and constructed for repair and replacement of gaskets, seals, pinions, and other applicable parts by operating personnel with common handtools. Removal and replacement of such parts shall not require more than 30 minutes.

3.6 Performance.

*3.6.1 Environmental conditions. The nozzle shall be capable of operating under and withstanding the following environmental conditions without adverse effects:

a. Temperatures ranging from -65° to +140°F.

b. Relative humidity up to 100 percent, including conditions wherein condensation takes place in the form of water and frost.

c. Sand and dust as encountered in normal and desert conditions.

d. Immersion in hydrocarbon test fluid for a period of 12 days.

*3.6.2 Capacity. The nozzle shall flow a minimum of 150 gpm of water at a nozzle inlet pressure of not more than 35 psi.

3.6.3 Pressures.

*3.6.3.1 Hydrostatic. The nozzle shall satisfactorily withstand hydrostatic pressures of 125 psi for 10 minutes without leakage, casting failure, or permanent deformation.

3.6.3.2 Surge. At flow rates of 150 gpm and with the nozzle attached to 60 feet of 1-1/2-inch hose and with the nozzle inlet pressure set at 35 psi, the nozzle shall not permit surge pressures to exceed 80 psi when the nozzle is closed within 2 seconds.

3.6.4 Lever pull. The force required to open the throttle and control the flow through the nozzle shall not exceed 20 pounds when the nozzle inlet pressure is set at 5, 25, 35, and 125 psi.

3.7 Details of components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.

*3.7.1 Body. The body of the nozzle shall be so designed that the centerline of the outlet spout connection will be at an angle of 90 degrees with the inlet hose connection. The inlet of the body shall be provided with a 1-1/2 inch female NPT. The outlet fitting shall be provided with threads designed to accept the outlet tube shown on figure 1.

3.7.1.1 Wear lugs. Two wear lugs shall be provided on both sides of the body to prevent damage to operating parts during usage.

*3.7.1.2 Grounding plug. The body shall be drilled to accomodate a grounding plug conforming to MS25384. The grounding plug shall be located in the bottom of the lever guard housing.

3.7.1.3 The cable, jack plug, and clip are not required to be furnished with the nozzle.

3.7.1.4 Impact. The body of the nozzle shall be capable of withstanding droppage onto a concrete floor from a height of 8 feet without failure.

3.7.2 Valve. The valve shall be designed and constructed to automatically shut off the water supply within 2 seconds when the hand control lever is released. It shall be capable of closing without shock or hammer. Elastomeric materials used in the valve design shall conform to MIL-R-25897. Valve springs and stems shall be made from stainless-steel of a grade and temper suitable for the application.


3.7.3 Operating lever. The valve shall be actuated by a hand-operated lever of ample size and strength to resist bending and breaking during normal service. The lever shall be securely attached to the nozzle. The lever shall be so shaped and pivoted that the contact of the nozzle stem with the lever is practically on the axis of the stem, thereby causing a minimum of side thrust on any packing gland.

*3.7.3.1 Lever guard. The operating lever shall be provided with a guard designed to guide the free end of the lever. The lever guard shall prevent opening of the nozzle and injury to the operating parts when the nozzle is dropped. The guard shall be securely fastened to the body, but detachable for easy replacement with ordinary tools. Release of the hand lever shall cause closure of the valve.

*3.7.4 Spout. The spout shall conform to figure 1. The spout shall be rigid and shall be removable to permit strainer cleaning and inspection. It shall be attached to the nozzle at the outlet end by means of a threaded coupling. All nozzle spouts procured separately shall be provided with a cap conforming to 3.7.4.1, a tube conforming to 3.7.4.2, and a gasket conforming to 3.7.4.3 (see 6.2).

3.7.4.1 Spout cap. Each spout shall be provided with a close-fitting removable cap of molded 1/4-inch-thick corrugated rubber or plastic material. The cap shall be a minimum of 3 inches in length and shall be provided with at least six circular corrugations to provide the necessary retaining power on the end of the smooth nozzle tube. The cap shall serve to close the end of the spout and to prevent the entrance of sand and dust. The cap shall be attached to

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.

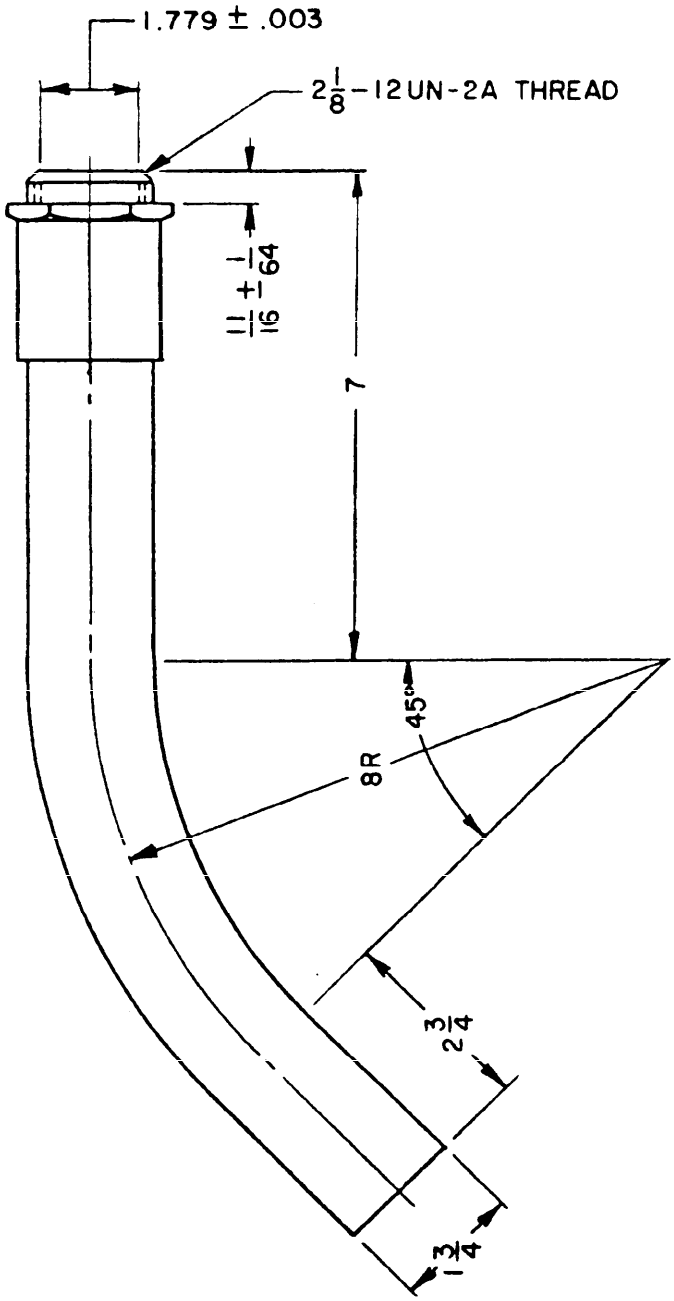

NOTES:
1. TUBE THICKNESS .083 ± .003
2. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES ± 1/32.

FIGURE 1. OVERWING NOZZLE SPOUT

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:37Z
Check the source to verify that this is the current version before use.

the spout at the coupling boss by means of a 16-inch length of 1/32-inch diameter meter cable conforming to MIL-C-5424 to prevent it from being lost. The cable shall be attached to the cap by means of a reinforced eyelet. The cap attachment method shall in no way prevent the delivery of water to the aircraft during servicing operations.

3.7.4.2 Tube. The tube shall be constructed of stainless-steel tubing with the minimum thickness shown of figure 1. The tube shall be welded to a stainless steel coupling.

3.7.4.3 Gasket. The spout shall be provided with a gasket to prevent leakage between the spout coupling and nozzle body. Gaskets shall be made from materials conforming to MIL-R-25897.

3.7.4.4 Strainer. The spout shall be provided with a readily removable stainless steel strainer as shown on figure 2. The shape of the strainer shall be conical. It shall be permanently attached to the reinforcing ring installed in the outlet end of the nozzle and secured to prevent the water from bypassing the strainer between the reinforcing ring and body. The strainer shall be designed for installation in the nozzle outlet connection.

3.7.4.4.1 Strainer guard. The strainer shall be provided with a wire mesh guard to prevent the metal cloth from bulging or being damaged from excessive pressure when the strainer becomes clogged. The guard shall be placed on the outside of the strainer and welded to the reinforcing ring. The screen, guard, and reinforcing ring shall be constructed of stainless-steel.

3.8 Threads. All hose, pipe, and machine screw threads shall conform to Handbook H28.

3.9 Part numbering of interchangeable parts. All parts having the same manufacturing part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.


*3.10 Weight. The weight of the nozzle, complete as specified herein, shall not exceed 9 pounds.

3.11 Finish. The exterior of the nozzle shall be cleaned by scratch brushing or buffing to remove all sand, oil, grease, and foreign matter.

3.12 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.13 Workmanship. The nozzle, including all parts and accessories, shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of marking of parts and assemblies, and freedom of parts from burrs and sharp edges.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:37Z
Check the source to verify that this is the current version before use.

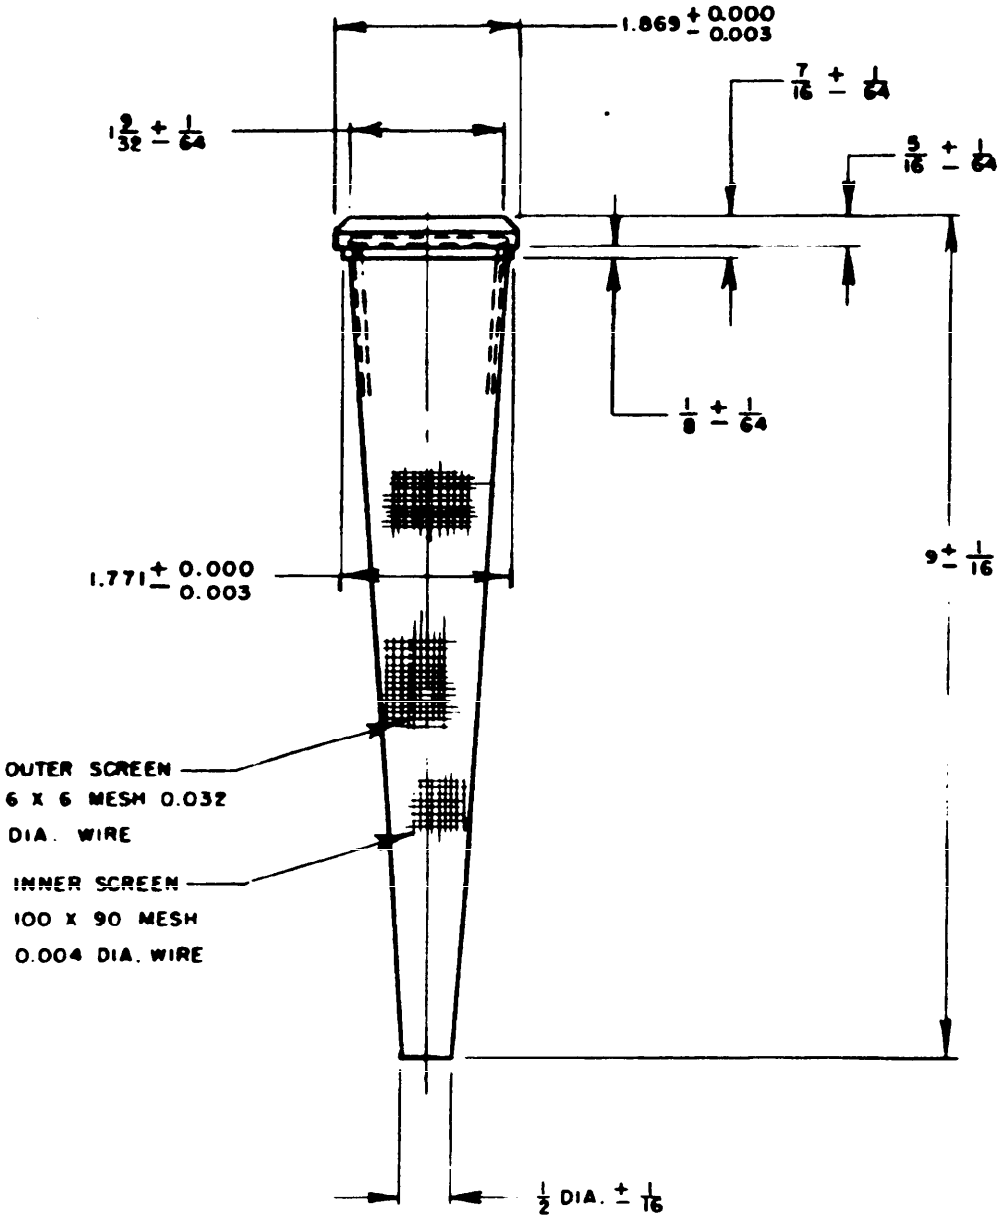

DIMENSIONS IN INCHES

FIGURE 2. Strainer.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:37Z
Check the source to verify that this is the current version before use.

3.13.1 Dimensional tolerances. Dimensions and tolerances, not specified, shall be as close as is consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the nozzle, they shall be held or limited accordingly.

3.13.2 Cleaning. The nozzle shall be thoroughly cleaned of loose metal chips and other foreign material after final assembly. Burrs and sharp edges shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

4.1.1 Inspection of components and material. In accordance with 4.1, the supplier is responsible for insuring that components and material used were manufactured, tested, and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards to the extent specified herein, or if none, in accordance with this specification.

4.2 Classification of tests. The inspection and testing of nozzles shall be classified as follows:

a. Preproduction tests..... See 4.4.

b. Acceptance tests..... See 4.5.

4.3 Test conditions.

4.3.1 Test system. The nozzle test system shall include the following components and the capability shown on figure 3.

4.3.1.1 Water reservoir. A water reservoir with a minimum capacity of 500 gallons shall be provided.

4.3.1.2 Pump. A centrifugal pump shall be provided and shall have a flow rate capacity of not less than 150 gpm of water. The pump shall be capable of producing the pressures at the pump discharge to conduct the tests specified herein.

4.3.1.3 Water filter. A water filter shall be provided and shall be of sufficient size and area to prevent the 100-mesh strainer in the nozzle from being clogged by water contaminants.

4.3.1.4 Water meter. A water meter capable of measuring 150 gpm of water within an accuracy of $\pm$2 percent shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.

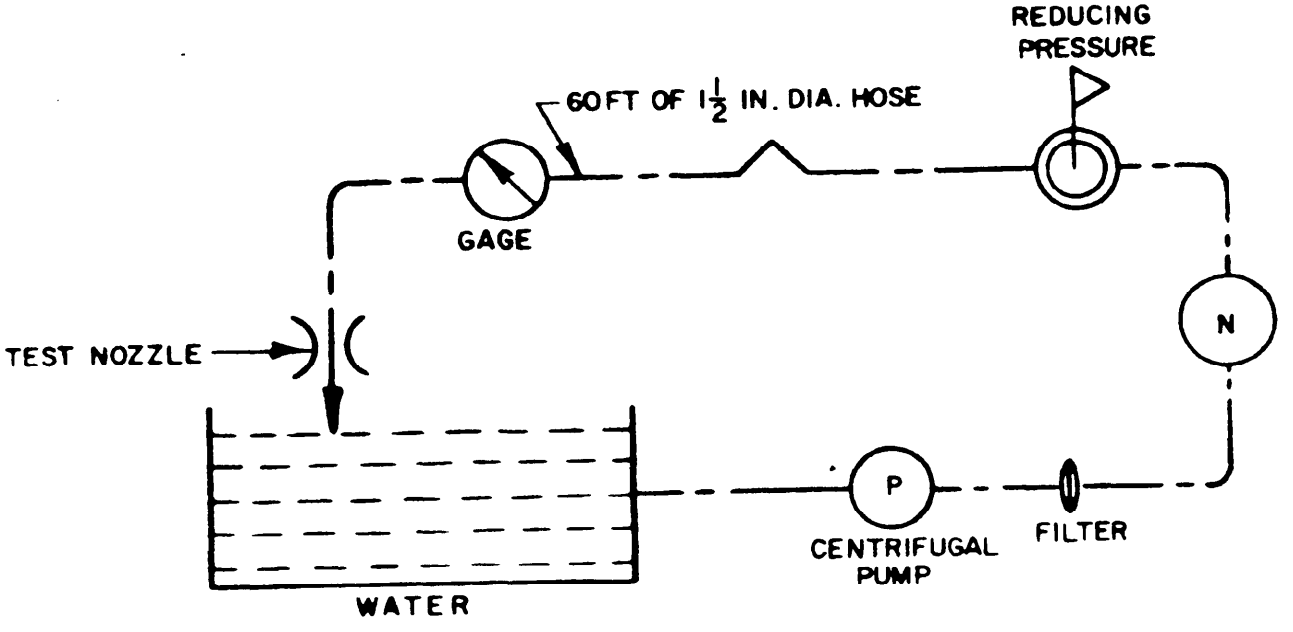


FIGURE 3. Flow System - Nozzle Test

4.3.1.5 Pressure reducing and flow control valve(s). Pressure reducing and a flow control valve (or valves) capable of adjusting the inlet pressure to the nozzle at 5, 25, 35, and 125 psi shall be provided.

4.3.1.6 Water servicing hose. Sixty feet of 1-1/2-inch diameter water servicing hose shall be provided.

4.3.1.7 Pressure gage. A pressure gage having a range of 0 to 160 psi shall be installed 10 pipe diameters upstream of the nozzle under test.

4.3.1.8 Pressure recording apparatus. Electronic pressure recording apparatus shall be provided and shall be capable of recording surge pressures (see 4.6.2.1.2) that will be encountered during testing and with the pressure pickup installed to 10 pipe diameters upstream of the nozzle under test.

4.3.2 Test fluid. Unless otherwise specified (see 6.2), the test fluid shall be demineralized or drinking water available at the test location.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:37Z
Check the source to verify that this is the current version before use.

4.4 Preproduction testing.

4.4.1 Test sample. The test sample shall consist of one nozzle representative of the production equipment. The sample shall be identified with the manufacturer's part number and such other information as required by the procuring activity.

*4.4.2 Test report. When specified (see 6.2), after completion of the preproduction tests, the contractor shall submit to the procuring activity, preproduction test samples accompanied by a test report, prepared in accordance with MIL-STD-831. The report shall include, but not be limited to, the following:

a. Eight-by-ten inch photographs of the nozzles, plus other photographs showing the nozzle undergoing testing.

b. Either oscilloscope photographs or oscillograms reflecting testing performed in compliance with 4.6.2.1.2 plus calibration data.

c. List by all applicable nozzle component manufacturers of the metals used in fabrication of respective components and identification of finishes (pasivating, impregnation, etc.) applied.

d. Certification by all applicable nozzle component manufacturers that elastomers used in respective components are compatible with demineralized water containing 5 to 10 ppm total solids.

e. Contractor and test activity comments on nozzle features and specification requirements.

4.4.3 Preproduction tests. Preproduction tests shall consist of all tests described under 4.6.

4.5 Acceptance tests. Acceptance tests shall consist of the following:

a. Individual tests.....See 4.5.1

b. Periodic sampling plan and test....See 4.5.2

4.5.1 Individual tests. Each nozzle shall be subjected to the following tests as described under 4.6:

a. Examination of product.....See 4.6.1.

b. Hydrostatic pressure test.....See 4.6.2.

4.5.2 Periodic sampling plan and test. One nozzle shall be selected at random from every one hundred or fraction thereof produced and subjected to the test specified in 4.6.2.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.

4.5.2.1 Rejection and retest. When an item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure have been determined and appropriately corrected. The contractor shall explain to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the tests shall be repeated.

4.5.2.2 Individual tests may continue. For production reasons, individual tests or other sampling plans may be continued pending the investigation of a sampling test failure. But final acceptance of the items on hand or items produced later shall not be made until it is determined that all items meet all the requirements of the specification.

4.5.2.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all the defects likely to be found and the method of correcting them.

4.6 Test methods.

4.6.1 Examination of product. The nozzle shall be examined to insure compliance with this specification with regard to workmanship, dimensions, material and proper operation.

4.6.2 Hydrostatic pressure test. The inlet of the nozzle shall be adapted so the nozzle can be filled with water, oil, or fuel. With the valve closed, the pressure in the nozzle body shall be increased to 125 psi and held at this pressure for 10 minutes. Neither the valve, valve body, packing, nor any component shall show evidence of leakage as a result of this test.

4.6.2.1 Functional test. The nozzle shall be installed in the test system specified in 4.3.1 through 4.3.1.8 and subjected to the following tests:

4.6.2.1.1 Lever pull test. With the inlet pressure to the nozzle set at 125 psi and with the valve closed, the lever of the nozzle shall be opened. The inlet pressure to the nozzle shall then be readjusted to 35, 25, and 5 psi and the nozzle reopened. During all tests, the force to open the nozzle shall not exceed 20 pounds. The force shall be measured at a distance of 4 inches from the fulcrum with a spring scale. The opening force of the nozzle shall be checked a minimum of three times at each inlet pressure increment. During all testing the nozzle shall open fully, throttle, and shall control the water flow. Upon release of the hand lever, the nozzle shall fully close and shut off the water flow within 2 seconds.

4.6.2.1.2. Capacity test. With the inlet pressure to the nozzle set at 35 psi, a minimum of 2,000 gallons of water shall be pumped through the nozzle. The rate of flow shall be measured during this test, and it shall be not less than 150 gpm. The valve shall be opened and closed under the test conditions described above, a minimum of 5 times. During this test, the valve shall shut off the water flow within 2 seconds and the peak pressure measured in the system shall be less than 80 psi.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:37Z
Check the source to verify that this is the current version before use.

*4.6.2.1.3 Valve test. The nozzle shall be opened and closed a minimum of five thousand times while pumping water at a minimum flow rate of 50 gpm. Upon conclusion of this test, the nozzle shall be disassembled and examined for wear and misalignment of parts. Any evidence of abnormal wear or malfunction shall be cause for rejection.

*4.6.3 Impact test. The nozzle shall be attached to a 12-foot section of 1-1/2-inch hose and dropped onto a concrete surface from a height of 8 feet. The nozzle shall be dropped a total of six times at various attitudes with the nozzle striking the surface of the concrete at various points to duplicate accidental droppage during usage. Upon completion of the test, the nozzle shall be subjected to and satisfactorily pass the hydrostatic pressure test described under 4.6.2.

4.6.4 Environmental tests. The nozzle shall be subjected to the following environmental tests in accordance with the applicable methods specified in MIL-STD-810.

4.6.4.1 Low temerature test. The nozzle shall be installed in a low temperature test chamber and subjected to the low temperature soak conditions described under method 502. Upon conclusion of the soak, the nozzle shall be removed from the chamber and the hand lever on the nozzle operated ten times. The nozzle shall show no adverse effects from this soak test.

4.6.4.2 Humidity test. The nozzle shall be subjected to the humidity test in accordance with method 507.

4.6.4.3 Sand and dust test. The nozzle shall be subjected to the sand and dust test in accordance with method 510.

4.6.4.4 High temperature soak test. The nozzle shall be immersed in demineralized water for a period of 7 days. During this test, the water shall have a PH of 6 and shall be maintained at a constant temperature of 140° ±5°F. Upon conclusion of the test, the nozzle shall be subjected to and shall satisfactorily pass the hydrostatic pressure test specified in 4.6.2.

4.6.4.5 Fuel-resistant test. The nozzle shall be dry and shall be placed in an oven and aged for 72 hours at 160°F. Using a minimum of 5 gallons of type III fuel conforming to TT-S-735, the nozzle shall be submerged in the fuel at a temperature of from 60° to 80°F for a minimum period of 72 hours in such a manner as to insure complete contact of synthetic parts with the fuel as would be experienced under service conditions. Immediately thereafter, the nozzle shall be exposed in the same manner to type I fuel conforming to TT-S-735 for a period of 216 hours. Upon completion of these tests, the nozzle shall meet the test specified in 4.6.2.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:37Z
Check the source to verify that this is the currentversion before use.

*4.6.4.6 Maintainability demonstration. The maintainability of the nozzle shall be demonstrated by observing and recording the time that is required to disassemble and reassemble the nozzle with common handtools. Disassembly and reassembly shall not exceed 30 minutes.

*4.7 Examination of preparation for delivery. An examination shall be made to determine that the packaging, packing, and marking comply with the requirements of section 5 of this specification.

5. PREPARATION FOR DELIVERY

*5.1 Preservation, packaging, packing, and marking. The nozzles shall be preserved; packaged level A or C; packed level A, B, or C; and marked in accordance with MIL-H-775 as specified (see 6.2).

6. NOTES

6.1 Intended use. The GRK-14/S32A-2 nozzle is intended to be used in the servicing of demineralized water to KC-135 and C-135 aircraft.

*6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.

b. Whether preproduction drawings or inspection model are required.

c. The number of nozzle spouts to be procured separately. These spouts shall meet the requirements of 3.7.4, 3.7.4.1, 3.7.4.2, and 3.7.4.3. All spouts procured separately shall be subjected to the examination of product described under 4.6.1.

d. Selection of applicable levels of preservation, packaging and packing required (see 5.1).

6.3 The outside margins of this specification have been marked to indicate where changes (deletions, additions, et cetera) from the previous issue have been made. This has been done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in those notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 11

Preparing activity:
Air Force - 11

Reviewers:
Air Force - 11, 69, 82, 85

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

SA-ALC/MMEDO
Kelly AFB, TX 78241

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:37Z
Check the source to verify that this is the current version before use.