
MIL-E-20652/1B
28 March 1986
SUPERSEDING
MIL-E-20652/1A
5 June 1972

MILITARY SPECIFICATION SHEET

EYELETS, METALLIC, ROLLED FLANGE TYPE; AND EYELET WASHER

This specification is approved for use by all Department and Agencies of the Department of Defense.

The requirements for procuring the eyelets and washers described herein shall consist of this specification and the latest issue of MIL-E-20652.

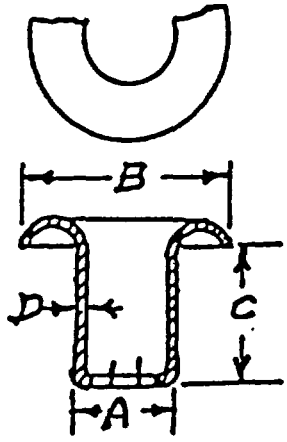

NOTE: FOR SCORES SEE TABLE I

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:09Z
Check the source to verify that this is the current version before use.

TABLE I. Eyelets

Dash No.	Superseded MS No.	A ± 0.004	B ± 0.007	C ± 0.008	D ± 0.0015 1/
BNE101		0.143	0.235	0.185	0.013
ABE102		0.156	0.254	0.121	0.014
BBE103	MS63033-4-4132	0.158	0.245	0.182	0.013
BBE104	MS63033-4-4133	0.158	0.245	0.222	0.013
BBE105		0.170	0.260	0.147	0.008
ABE106		0.177	0.300	0.138	0.014
BWE107		0.183 3/	0.300	0.142	0.010
BE108		0.185 3/	0.312	0.145	0.008
BNE109		0.185	0.285	0.147	0.010
BBE110	MS63033-3-1563	0.200	0.300	0.187	0.012
ABE111		0.192 - 0.208 2/	0.346	0.145	0.015
ABE112		0.200	0.343	0.210	0.016
AWE113		0.200	0.343	0.210	0.016
BBE114 4/	MS63033-7-4093	0.200	0.403	0.143	0.013
ABE115 4/	MS63033-1-4094	0.200	0.403	0.210	0.013
AWE116	MS63033-1-4094	0.200	0.403	0.210	0.013
BBE117 4/	MS63033-1-4094	0.200	0.403	0.210	0.013
BBE118 4/	MS63033-2-4211	0.200	0.403	0.250	0.013
BBE119		0.204	0.345	0.185	0.009
BBE120 4/	MS63034-2-4213	0.212	0.550	0.237	0.016

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:09Z
Check the source to verify that this is the current version before use.

TABLE I. Eyelets (cont'd)

Dash No.	Superseded MS No.	A ± 0.004	B ± 0.007	C ± 0.008	D ± 0.0015 1/
BBE121 4/	MS63034-1-4212	0.212	0.550	0.297	0.015
ABE122		0.221	0.388	0.166	0.015
AWE123		0.221	0.388	0.166	0.015
BBE124		0.210-0.233 2/	0.460	0.155	0.012
BBE125		0.273	0.450	0.185	0.008
ABE126		0.279	0.494	0.180	0.016
AWE127		0.279	0.494	0.180	0.016
ABE128		0.285-0.297 2/	0.490	0.198	0.016
ABE129		0.288-0.321 2/	0.505	0.222	0.017
AWE130		0.288-0.321 2/	0.505	0.222	0.017
ABE131		0.350	0.592	0.188	0.016
AWE132		0.350	0.592	0.188	0.016
BNE 133		0.332	0.593	0.185	0.010

1/ D = Metal thickness before fabrication of eyelet.

2/ Tapered shank.

3/ 6 to 8 equal scores on shank end.

4/ May be used with flat washer. See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:09Z
Check the source to verify that this is the current version before use.




TABLE II. Washers

Dash No.	R ± .002	S ± .003	T + .004 - .002	Use with Eyelets-Number
-ABW100	.220	.450	.020	ABE115
-BBW101	.220	.450	.020	BBE114, BBE117 BBE118
-BBW102	.250	.503	.031	BBE120, BBE121

REQUIREMENTS:

Dimensions: In inches. See tables I and II.
Configuration: See applicable figures.
Material: Aluminum or brass. (see MIL-E-20652, 3.2.1 and 3.2.2)
Finish: For aluminum black or white enamel. (see MIL-E-20652, 3.3.1)
For brass, black chemical. (see MIL-E-20652, 3.3.2)

Part Number: Consists of the basic number of this specification sheet and a dash number from the tables.

Code letters:

ABE indicates aluminum alloy, black enamel finish eyelet.
ABW indicates aluminum alloy, black enamel finish washer.
AWE indicates aluminum alloy, white enamel finish eyelet.
BE indicates brass, enamel finish eyelet. Color as specified (see 6.2 of general specification).
BBE indicates brass, black chemical finish eyelet.
BWE indicates brass, white enamel finish eyelet.
BBW indicates brass, black chemical finish washer.
BNE indicates brass, natural finish eyelet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:09Z
Check the source to verify that this is the current version before use.

Example: M20652/1 - ABE101 for eyelet. For eyelet with washer specify eyelet number from table I plus washer number from table II, i.e., M20652/1 - BBE109 and M20652/1 - BBW101.

TABLE III. Eyelets (brass, nickel and cadmium plated)

Dash No.	A ± 0.002	B	C	D
BNPE133	0.073	0.117 ± .007	0.085	0.010 average
BCPE134	0.185	0.265	0.102	0.013 average

REQUIREMENTS:

Dimensions: In inches (see table III).
Configuration: See figure, page 1.
Material: Brass composition 2, annealed of QQ-B-613.
Finish: Nickel plated, class 1, type III of QQ-N-290.
Cadmium plated, class 3, type II of QQ-P-416.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: BNPE indicates a brass, nickel plated finish eyelet.
BCPE indicates a brass, cadmium plated finish eyelet.

Example: M20652/1 - BNPE133.

TABLE IV. Eyelets (brass, cadmium plated)

Dash No.	A	B	C	D
BCPE135	0.056 to 0.062	0.099 to 0.111	0.187 ± .008	0.007 approximate

REQUIREMENTS:

Dimensions: In inches (see table IV).
Configuration: See figure, page 1.
Material: Brass, composition 260 or 268, 1/2 hard temper of QQ-B-613.
Finish: Cadmium plated, class 3, type I, 0.0002 inches minimum thickness of QQ-P-416.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: BCPE indicates a brass, cadmium plated finish eyelet.

Example: M20652/1 - BCPE135.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:09Z
Check the source to verify that this is the current version before use.

TABLE V. Eyelets (brass, natural finish)

Dash No.	A	B	C	D
*BNE136	0.087 to 0.091	0.145 to 0.155	0.093	0.008
*BNE137	0.087 to 0.091	0.145 to 0.155	0.187	0.0095
*BNE138	0.087 to 0.091	0.145 to 0.155	0.250	0.010

*Eyelets for use in 0.093 diameter holes.

REQUIREMENTS:

Dimensions: In inches (see table V).
Configuration: See figure, page 1.
Material: Brass, composition 260 or 280, 1/2 hard of QQ-B-613.
Finish: Brass, natural.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: BNE indicates brass, natural finish eyelet.

Example: M20652/1 - BNE136.

TABLE VI. Eyelets (brass tin plated)

Dash No.	A	B	C	D
BTE139	0.059	0.105	0.093	0.008 (maximum)

REQUIREMENTS:

Dimensions: In inches (see table VI).
Configuration: See figure, page 1.
Material: Brass, composition 260 of QQ-B-613.
Finish: Tin plated, type I, 0.0002 inches thick of MIL-T-10727.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: BTE indicates brass, tin plated finish eyelet.

Example: M20652/1 - BTE139.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:09Z
Check the source to verify that this is the current version before use.

TABLE VII. Eyelets (brass, cadmium plated and natural finish)

Dash No.	A	B	C	Overall length
BCP140	0.086 to 0.092	0.145 to 0.152	0.120 to 0.130	0.146 to 0.152
BCP141	0.086 to 0.092	0.145 to 0.155	0.213 to 0.223	------
BNE142	0.113 to 0.124	0.194 to 0.206	0.117 to 0.133	------
BCP143	0.086 to 0.092	0.144 to 0.156	0.148 to 0.164	------
BCP144	0.286 to 0.292	0.145 to 0.152	0.088 to 0.098	------

REQUIREMENTS:

Dimensions: In inches (see table VII).
Configuration: See figure, page 1.
Material: Brass, composition 260 of QQ-B-613.
Finish: Cadmium plated, class 3, type I of QQ-P-416.
Brass natural.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: BCP indicates brass cadmium plated finish eyelet.

Example: M20652/1 - BCP140.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

Project No. 5325-0225

Review activities:

Army - AR
Air Force - 82
DLA - IS

User activities:

Army - AT, ME
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:09Z
Check the source to verify that this is the current version before use.