
MIL-E-20652/2B
28 March 1986
SUPERSEDING
MIL-E-20652/2A
5 June 1972

MILITARY SPECIFICATION SHEET

EYELETS, METALLIC, FLAT FLANGE TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for procuring the eyelets described herein shall consist of this specification and the latest issue of MIL-E-20652.

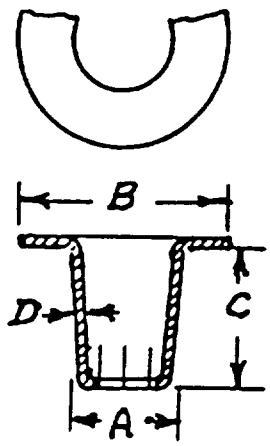

NOTE: For scores (See table I)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:10Z
Check the source to verify that this is the current version before use.

TABLE I. Eyelets (aluminum, anodized)

Dash No.	A ± 0.004 2/	B ± 0.007	C ± 0.008	D ± 0.0015 1/
AAE201	0.131 to 0.157 3/	0.236	0.125	0.014
AAE202	0.144 to 0.175 3/	0.256	0.132	0.014
AAE203	0.156 to 0.184 3/	0.298	0.130	0.014
AAE204	0.208 to 0.234	0.439	0.224	0.014

1/ Metal thickness before fabrication of eyelet.

2/ Tapered shank.

3/ 6 to 8 equal scores on shank end.

REQUIREMENTS:

Dimensions: In inches (see table I).
Configuration: See figure.
Material: Aluminum (see MIL-E-20652, 3.2.2).
Finish: Commercial anodized (see MIL-E-20652, 3.3.3).
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: AAE indicates aluminum alloy, anodized finish eyelet.

Example: M20652/2 - AAE201.

TABLE II. Eyelets (copper, tin plated)

Dash No.	A ± 0.001	B	C	D(ref)	Flange (radius maximum)
*CTE205	0.048	0.072	0.108	0.006	0.015

*For mounting hole diameter of 0.055.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: In inches (see table II).
Configuration: See figure.
Material: Copper of QQ-C-576, electrolytic tough pitch, cold rolled deep-drawn annealed.
Finish: Tin plated, solderability, type I, 0.003 to 0.005 thick of MIL-T-10727.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: CTE indicates a copper, tin plated finish eyelet.

Example: M20652/2 - CTE205.

TABLE III. Eyelets (brass, gold plated)

Dash No.	A ± 0.002	B	C	D	Hole diameter	Grip maximum
BGE206	0.121	0.200	0.174	0.0095	0.125 to 0.129	0.139

REQUIREMENTS:

Dimensions: In inches (see table III).
Configuration: See figure.
Material: Brass annealed, composition 260 of QQ-B-613 or brass annealed, Rockwell hardness 72-85F scale, grain size 0.025 millimeters of QQ-B-626.
Finish: Gold plated, MIL-G-45204, type II, grade A, class 3 over copper plate 0.00025 minimum thickness of MIL-C-14550.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: BGE indicates a brass, gold plated finish eyelet.

Example: M20652/2 - BGE206.

TABLE IV. Eyelets (brass cadmium plated and stainless steel passivated)

Dash No.	A ± 0.003	B ± 0.006	C ± 0.008	D
BCE207	0.059	0.115	0.071	0.006
CPE208	0.183	0.249	0.052	0.010

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: In inches (see table IV).
Configuration: See figure.
Material: Brass (QQ-B-613) and stainless (QQ-S-766).
Finish: Brass, cadmium plated, type I, class 3 of QQ-P-416 and stainless steel passivated to QQ-P-35.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: BCE indicates brass, cadmium plated finish eyelet.
CPE indicates a stainless steel, passivated finish eyelet.

Example: M20652/2 - BCE207.

TABLE V. Eyelets (brass or copper, gold plated)

Dash No.	A	B	C	D
BGE or CGE209	0.030 to 0.032	0.045 to 0.048	0.086 to 0.090	0.005
BGE or CGE210	0.045 to 0.051	0.062 to 0.072	0.090 to 0.100	0.005

REQUIREMENTS:

Dimensions: In inches (see table V).
Configuration: See figure.
Material: Copper, QQ-C-576 or brass QQ-B-613.
Finish: Gold plated, MIL-G-45204, type I, class 1.
Part Number: Consists of the basic number of this specification sheet and dash number from the table.
Code Letters: BGE indicates a brass, gold plated finish eyelet.
CGE indicates a copper, gold plated finish eyelet.

Example: M20652/2 - BGE or CGE209.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:10Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Air Force - 82
DLA - IS

User activities:

Army - AT, ME
Navy - MC

Preparing activity:

Army - GL

Project No. 5325-0226

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:10Z
Check the source to verify that this is the current version before use.