INCH-POUND

A-A-52481
October 28, 1993
SUPERSEDING
MS52000A
14 December 1982

COMMERCIAL ITEM DESCRIPTION

GASKET, RUBBER, SYNTHETIC

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for MS52000A, which is canceled.

ABSTRACT

This CID covers a synthetic, rubber gasket used between electric receptacle connectors. Gasket is intended to be used for wall and box mounting.

SALIENT CHARACTERISTICS

a. Design and construction. The design and construction of the gasket shall be in accordance with figure 1.

b. Materials. Gaskets shall be made of materials conforming to rubber M2BC815 Grade SC815C1E3 per ASTM D2000. The use of recovered materials made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see note e).

c. Identification markings. Identification markings shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE) and part number, military part identification number (PIN), and the date of manufacture/cure date (see note b).

QUALITY ASSURANCE PROVISIONS


a. Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000.

AMSC N/A FSC 5330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

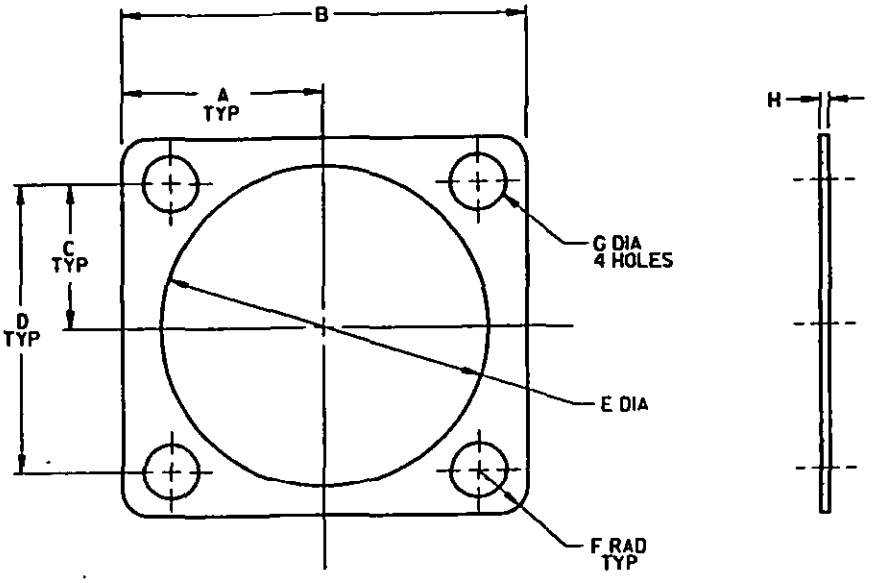

PIN Dash No. A52481	DIM A	DIM B +.016 -.000	DIM C	DIM D	DIA E +.016 -.000	RAD F	DIA G	DIM H +.010
-1	.437	.875	.297	.594	.500	.141	.172	.031
-2	.500	1.000	.359	.719	.625	.141	.172	.031
-3	.547	1.094	.406	.813	.750	.141	.172	.031
-4	.594	1.188	.453	.906	.875	.141	.172	.031
-5	.641	1.281	.484	.969	1.000	.156	.172	.031
-6	.688	1.375	.531	1.063	1.125	.156	.203	.031
-7	.750	1.500	.578	1.156	1.250	.172	.203	.031
-8	.813	1.625	.625	1.250	1.375	.188	.203	.031
-9	.875	1.750	.687	1.375	1.500	.188	.203	.031
-10	1.000	2.000	.781	1.563	1.750	.219	.203	.031
-11	1.344	2.688	1.094	2.188	1.750	.250	.203	.031
-12	1.125	2.250	.875	1.750	2.000	.250	.219	.031
-13	1.250	2.500	.969	1.938	2.188	.281	.219	.031
-14	1.375	2.750	1.094	2.188	2.437	.281	.219	.031

NOTE: Dimensions are in inches. Unless otherwise specified, tolerances are ± .010 on decimals.

FIGURE 1. Gasket, rubber, synthetic.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:10Z
Check the source to verify that this is the currentversion before use.

b. Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING

Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract (see note b).

NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

a. Addresses for obtaining copies of referenced documents.

1. Non-Government specifications and standards. ASTM D2000 "Standard Classification System for Rubber Products in Automotive Applications" is available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

b. Ordering data. Acquisition documents must specify the following:

1. Title, number, and date of this CID.
2. Gasket size and PIN number (see figure 1).
3. Selection of applicable level and packaging requirements.
4. If marking is other than specified.

c. Cross-reference data. Gaskets conforming to this CID are interchangeable/substitutable with gaskets conforming to MS52000(AT), dated 14 December, 1982.

1. Former part numbers. PIN dash numbers are the same as MS52000(AT) dash numbers which are cross referenced as follows:

Dash Number	Former Ordnance Part Number	Shell size (MS3100 & 3102)	Dash Number	Former Ordnance Part Number	Shell size (MS3100 & 3102)
-1		8.S	-8	7388352	22
-2		10S & 10SL	-9		24
-3	7358501	12 & 12S	-10	7388357	28
-4	7358502	14 & 14S	-11		28
-5	7358503	16 & 16S	-12	7358505	32
-6	7358504	18	-13		36
-7		20	-14		40

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:10Z
Check the source to verify that this is the currentversion before use.

d. Part or identification number (PIN). The PINs to be used for gaskets acquired to this CID are as follows:

A 52481 - XX

- XX — Dash number (see figure 1).
- 52481 — CID number.
- A — Prefix letter to indicate CID.

e. Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

MILITARY INTERESTS:

Custodian:
Army - AT

Review activities:
Army - MI
DLA - IS

CIVIL AGENCY COORDINATING ACTIVITY
GSA-FSS

PREPARING ACTIVITY:
Army - AT

(Project 5330-0898)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.