A-A-52490A
December 8, 1995
SUPERSEDING
A-A-52490
April 21, 1994
(see 7.5)

COMMERCIAL ITEM DESCRIPTION

BELTS, V: LIGHT-DUTY OR FRACTIONAL-HORSEPOWER

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers requirements for stock power transmission, light-duty, endless V-type belts. The V-belts are for use with fractional-horsepower engines or motors that use small diameter pulleys on drives which generally require a single belt. The V-belts are intended for intermittent or infrequent use, rather than continuous operation. Typical applications are: shop equipment, blowers, and centrifugal pumps (see 7.4).

2. CLASSIFICATION. Stock V-belts shall be classified in accordance with the Rubber Manufacturers Association (RMA) V-belt designations and sizes as specified in RMA IP-23, and listed in table I only for reference purposes.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

FSC 3030

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

TABLE I. RMA V-belt designations.

RMA V-belt cross section			Effective outside length (inches)	
Designation	Nominal Size			
	Width (inches)	Height (inches)	1 inch increment	2 inch increment
2L	0.25	0.16	8 to 20	--
3L	0.38	0.22	14 to 50	52 to 60
4L	0.50	0.31	18 to 80	82 to 100
5L	0.66	0.38	25 to 80	82 to 100

3. SALIENT CHARACTERISTICS.

3.1 Materizl. Unless otherwise specified herein, materials shall be in accordance with the manufacturer's specifications/drawings. The use of recovered materials made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see 4.1).

3.1.1 Rubber. Rubber shall consist of either natural or synthetic rubber compounds.

3.1.2 Fabric. Fabric shall be woven of multiple plies of natural or synthetic fibers impregnated with a rubber compound.

3.1.3 Cords. Cords shall be fabricated from natural or synthetic fibers twisted into a cord Cords shall be prestretched and impregnated with rubber compound.

3.2 Design and construction. The design and construction of stock V-belts shall consist of tension members (inserts) and a compression member (cushion) molded into an endless loop having a trapezoidal cross section.

3.2.1 Tension members. Tension members shall be fabricated from either fabric or cords. Tension members shall be arranged m a symmetrical pattern parallel to the circumference of the belt, uniformly spaced in a direction parallel to the direction of the load, and imbedded in the belt structure.

3.2.2 Compression member. The compression member shall consist of natural or synthetic rubber compounds and may include natural or synthetic fiber cords or fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

3.2.3 Splicing. Not more than two transverse splices shall be allowed in any ply of fabric m any V-belt having a length of 65 inches or less. Belts over 65 inches shall have not more than three transverse splices in any ply of fabric.

3.2.4 Notching or cogging. The inner circumference of the V-belt may be plain, notched, or cogged.

3.2.5 Covers. Covers, if used, shall consist of one or more plies of stretchable fabric or bias cut cord, frictioned or impregnated for adhesion.

3.2.6 Dimensions. V-belt cross sections and standard effective length dimensions shall be in accordance with RMA IP-23 (see table I).

3.2.7 Interchangeability. All V-belts of a given cross section shall be interchangeable for use with standard sheave grooves, of the same designation, conforming to RMA IP-23.

3.3 Performance.

3.3.1 Resistance to high and low temperatures. Unless otherwise specified (see 7.2 and 7.4), V-belts shall show no signs of cracking, fraying, splitting, or breaking during and after exposure to high and low temperatures, as specified in RMA IP-3-1 Technical Bulletin.

3.3.2 Oil and chemical resistance. V-belts shall be oil and chemical resistant in accordance with the guidelines of RMA IP-3-2 Technical Bulletin.

3.3.3 Electical resistivity. V-belt electrical resistivity shall not be greater than six megohms when tested in accordance with RMA IP-3-3 Technical Bulletin.

3.3.4 Age control.. When specified (see 7.2), V-belts shall be not more than 12 months old (four calendar quarters) at the time of acceptance by the Government (see 7.7).

3.4 Matched sets. When specified (see 7.2), belts shall be furnished in matched sets according to designation, length, and quantity specified, The difference m effective outside lengths of belts in a matched set shall not exceed 0.10 inch and each belt m a matched set shall conform to the requirements for a single belt.

3.5 Identification and marking. V-belts shall be marked on the outside circumference in a permanent and legible manner. Ink imprinting or molded markings are acceptable. Identification and marking shall include the manufacturer's CAGE code or trademark, and the belt PIN (see 7.3). When applicable, identification and marking shall also include the requirements m 3.5.1 and 3.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

3.5.1 Age control. When age control is specified (see 3.3.4), the marking shall include the quarter and year (such as 4Q93) of manufacture.

3.5.2 Matched sets. When matched sets are specified (see 3.4), all belts of a matched set shall be tied together and shall include a tag or label printed with the following notice: "WARNING, this is a matched set. Do not break ties except at installation."

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

5.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING. Preservation, packing, and marking shall be as specified m the contract or order (see 7.2).

7. NOTES.

(This section contains information of a general or explanatory nature that maybe helpful, but is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents.

7.1.1 Government documents. Copies of the Code of Federal Regulations (CFR) are available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

7.1.2 Non-Government documents. Copies of RMA IP-23 “Light Duty Single V-Belts Specifications: Joint MPTA/RMA (2L, 3L, 4L and 5L Cross Sections)”, RMA IP-3-1 “Heat Resistance of Power Transmission Belts”; RMA IP-3-2 “Oil and Chemical Resistance of Power Transmission Belts”; and RMA IP-3-3 “Static Conductive V-Belts” are available from Rubber Manufacturers Association (RMA), 1400 K Street, N. W., Suite 900, Washington, DC 20005.

7.2 Ordering data. Acquisition documents must specify the following:

Title, number, and date of this CID.
b. Issue of Department of Defense Index of Specifications and Standards (DODISS) to be cited-m the solicitation, and if required, the specific issue of individual documents referenced.
c. PIN and quantity required.
d. If higher and/or lower temperatures are required for temperature resistance.
e. If age control is required.
f. If matched sets are to be furnished; also the PIN and quantity of belts per set.
g. Selection of applicable level and packaging requirements.

7.3 Part identification number (PIN). The PINs to be used for V-belts acquired to this CID are based upon the RMA IP-23 belt designations and are created as follows:

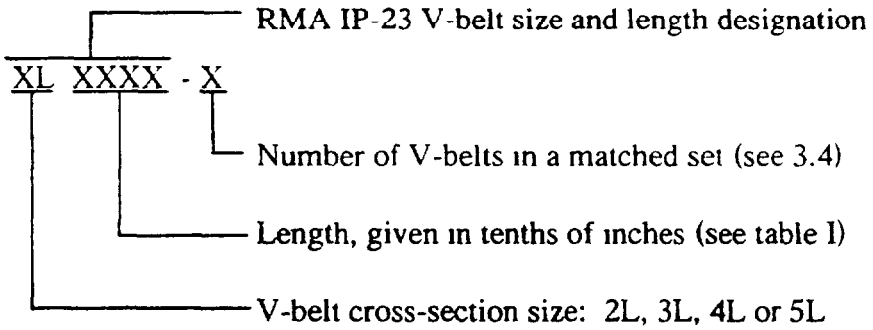

7.4 Special applications. Special applications requiring single V-belts that exceed the resistance to high and low temperatures specified in 3.3.1 may be ordered, however, a deterioration in the performance requirements should be expected.

7.5 Supersession data. This CID supersedes ZZ-B-215B, dated 3 March 1980, MS39240B, MS39241B, MS39242B, and MS39243B which are dated 22 June 1981.

7.6 Cross reference data. V-belts acquired under this CID are interchangeable with V-belts conforming to the superseded documents mentioned above. Examples of the cross reference relationship between the CID PINs and the MS part numbers arc as follows:

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:10Z
Check the source to verify that this is the current version before use.

CID PIN	Superseded MS Part No.	CD PIN	Superseded MS Part No.
2L080	MS39240-2L080	4L840	MS39242-4L840
3L520	MS39241-3L520	5L1OOO	MS39243-5L1OOO

NOTE: PINs related to the rest of the dimensions can be cross referenced the same way as above.

7.7 Age. The age requirement should be imposed only for large quantity procurement of belts that are intended for replacement purposes over a period of several years.

MILITARY INTERESTS:

Custodians.
Army - AT
Navy - YD-1

Review activities:
Army - AV
Navy - MC
DLA - CS

CIVIL AGENCY COORDINATING ACTIVITIES: .
GSA - FSS
DOT - ACO

PREPARING ACTIVITY:
Army - AT

(Project 3030-0201)

Source: https://assist.dla.mil -- Downloaded: 2026t0-26T09:10Z
Check the source to verify that this is the currentversion before use.