[INCH-POUND]
A-A-52493
April 15, 1994
SUPERSEDING
MS63043C
20 August 1973

COMMERCIAL ITEM DESCRIPTION

ROD END, THREADED-LINKAGE, RIGID

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers rigid rod end clevises. The items are intended to be attached to a shaft or rod by pinning to provide a means of fastening or attaching the shaft or rod to another part

2. SALIENT CHARACTERISTICS.

2.1 Materials. The material shall be carbon steel, Unified Numbering System (UNS) G10150 through G10290. These steels shall have a minimum ultimate tensile strength of 55,000 pounds per square inch (psi) The use of recovered materials is acceptable providing that all requirements of this CID are met (see note 5.5).

2.2 Design and construction. The design and construction of rod ends shall be in accordance with figure 1.

2.3 Protective finish. When specified (see 5.2), protective finish shall be zinc coating in accordance with ASTM A123 or ASTM B633-85, type II, class SC3.

2.4 Identification and markings. Identification and markings shall be permanent and legible and shall consist of the part identification number (PIN) and the manufactuer's identification (see 5.2 and 5.3).

3. QUALITY ASSURANCE PROVISIONS.


3.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000.

AMSC N/A FSC 5340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

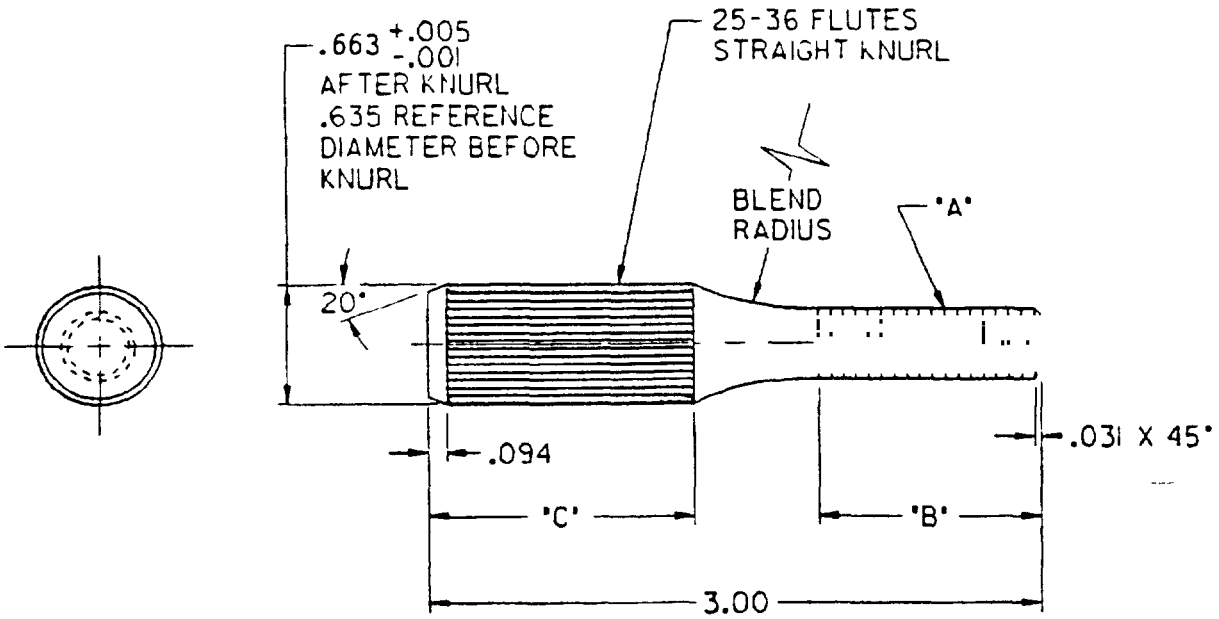

PIN Number	"A" Thread UNF-2A	"B" Thread Length	"C" Knurl Length	Former MS Part Number	Former Army Part Number
A52493-1	.3125 - 24	0.937	1.625	MS63043-1	8689584
A52493-2	.375 - 24	1.437	1.125	MS63043-2	8741801
A52493-3	.500 - 20	1.25	1.312	MS63043-3	NONE
A52493-4	.625 - 18	1.437	1.125	MS63043-4	NONE

NOTE: 1. Surfaces except knurling shall be free from burrs and sharp edges.
2. Dimensions are in inches. Unless otherwise specified, tolerances are ± .031 on decimals and ±5 degrees on angular dimensions
3. This CID is not intended to limit construction to features other than as shown herein.

Figure 1. Threaded rod end design, configuration and part numbers.

3.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Item with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.

4 PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING. Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract (see 5.2).

5. NOTES. This section contains information of a general or explanatory nature that may be helpful but is not mandatory


5.1 Addresses for obtaining copies of referenced documents.

5.1.1 Non-Government publications Copies of ASTM A123 "Standard Specifications for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products" and ASTM B633-85 "Standard Specifications for Electrodeposited Coatings of Zinc on Iron and Steel" are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103. Descriptions of UNS steel designations are in the "Metals and Alloys in the Unified Numbering System" publication. Copies of this publication are available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096-0001.

5.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
c PIN number and quantity required (see 2.4 and 5.3).
d. Protective finish, if required (see 2.3).
e. Selection of applicable level and packaging requirements (see 4).

5.3 Part or identification number (PIN). The PINs to be used for rod ends acquired to this CID are created as follows.

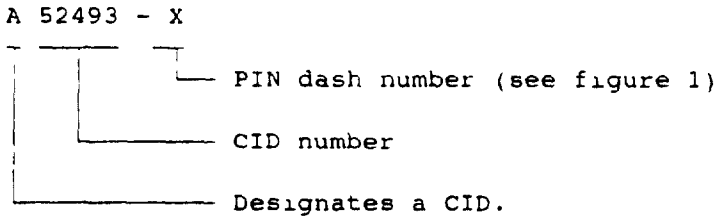

5.4 Cross-reference data. Rod ends conforming to this CID are substitutable or interchangeable with rod ends conforming to MS63043C.

5.5 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

MILITARY ACTIVITY:

Custodian:
Army - AT
Air Force - 99

Review activities:
Air Force - 82

User activities:
Army - MI
Navy - MC, OS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing activity
Army - AT

(Project 5340-2176)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:10Z
Check the source to verify that this is the current version before use.