[METRIC]
A-A-52500
August 8, 1994
SUPERSEDING
MS53058A(MO)
16 December 1964

COMMERCIAL ITEM DESCRIPTION

CABLE AND CONDUIT ASSEMBLY, PARKING BRAKE-LOOP TYPE, BUTTON END FITTING (METRIC)

The General Services Administration has authorized the use of this commercial item description (CID), for all federal agencies.

1. SCOPE. This CID covers three sizes of parking brake cable and conduit assemblies with loop-type button end fittings. The cable and conduit assembly is capable of withstanding a load of 910 kilograms (Kg).

2. SALIENT CHARACTERISTICS.

2.1 Materials. Unless otherwise specified herein, the materials used shall be in accordance with the manufacturer's specifications/drawings utilized in the manufacture of products that parallel the functions of the items covered by this CID. The use of recovered materials is acceptable providing that all requirements of CID are met (see 5.5).

2.2 Design and construction. Unless otherwise specified herein and in figure 1, the parking brake-loop type cable and conduit assembly with button end fittings shall be designed and constructed in accordance with the manufacturer's specifications/drawings.

2.3 Plating. Unless otherwise specified, all steel parts shall be zinc plated in accordance with ASTM B633, minimum thickness of plating is 12 micrometers.

2.4 Grease. Conduit shall be packed at assembly with grease. The grease shall be lubricant type and unless otherwise specified (see 5.2) shall withstand temperature of -54 degrees Celsius (°C).

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive Command, ATTN: AMSTA-GLC, Warren, MI 48397-5000.

FSC 2530

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

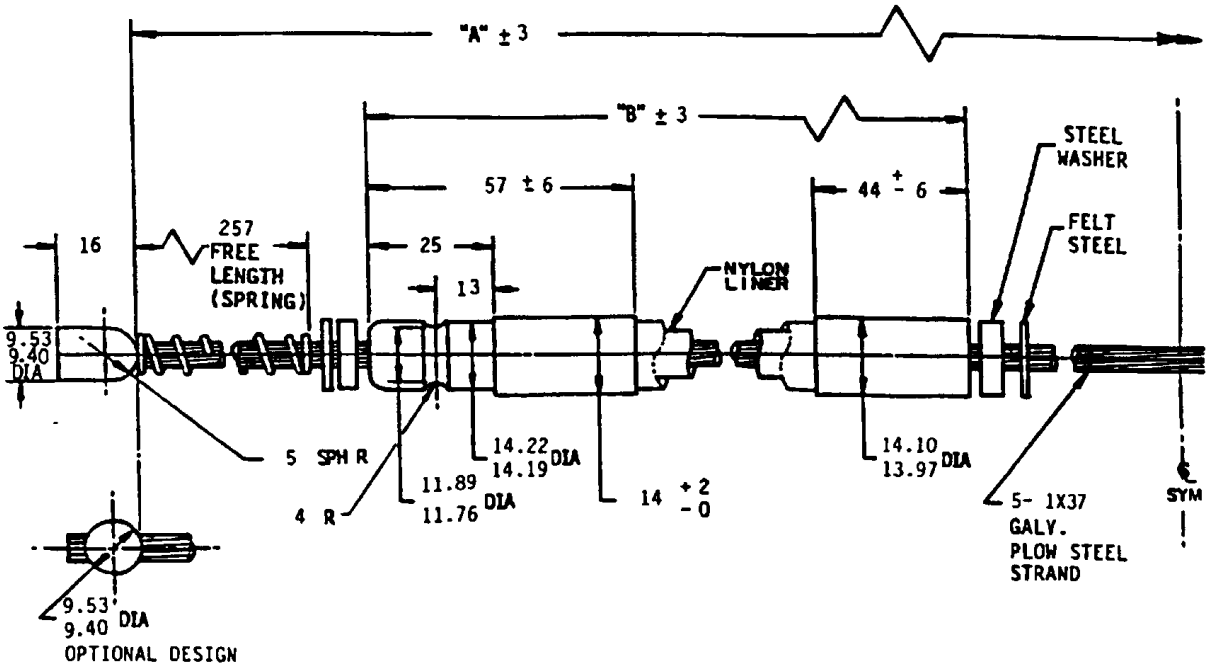

CID PIN no.	Former MS part number	"A" DIM	"B" DIM
A52500-1	MS53058-1	2496	584
A52500-2	MS53058-2	2781	683
A52500-3	MS53058-3	4121	1397

NOTE: Dimensions are in millimeters. Unless otherwise specified, tolerances are ± 0.76

FIGURE 1. Cable and conduit assembly with loop type, button end fitting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

2.5 Performance. The cable and conduit assembly shall be capable of operation down to -54°C (see 5.2). Each cable and conduit assembly shall be pre-stretched under a load of 454 kg. The cable assembly shall be capable of withstanding a load of 910 kg. sustained for a period of two hours with a maximum permissible slippage of each end fitting with respect to the cable of 0.4 millimeter (mm). With load applied, the cable outer sheath shall not show any lateral displacement or permanent deformation of conduit. The outside diameters of conduit coils shall remain in-line.

2.6 Identification markings. Identification markings shall be permanent and legible and shall include, as a minimum, the manufacturer's CAGE code and part number, and the part identification number (PIN) (see figure 1 and 5.3).

3. QUALITY ASSURANCE PROVISIONS.

3.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

3.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Item with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4. PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING. Preservation, packaging, packing, labeling, and marking for the desired level shall be as specified in the contract (see 5.2).

5. NOTES. (This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

5.1 Addresses for obtaining copies of referenced documents.

5.1.1 Government specifications. Copies of MIL-G-23827 "Grease, Aircraft and Instrument, Gear and Actuator Screw" are available from the Defense Printing Service Detachment Office, Bldg. 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.

5.1.2 Industry specifications. Copies of ASTM B633 "Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel" are available from the American Society for Testing and Materials, 1916 Race Street, Philadephia, PA 19103.

5.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Part or identification number (PIN).
c. Selection of applicable level and packaging requirements.
d. Use of MIL-G-23827 for grease lubricant when operating temperature is lower than -54°C.
e. Issue of Department of Defense Index of specifications and standards (DoDISS) to be cited in the solicitation, and if required, the specific issue of individual documents referenced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

5.3 Part identification number (PIN). The PINs to be used for cable and conduit assemblies acquired to this CID are created as follows:

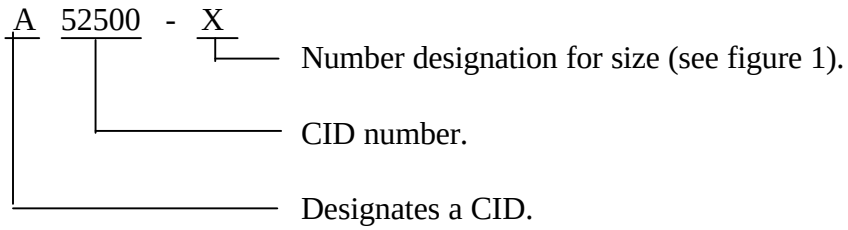

5.4 Cross-reference. Cable and conduit assemblies conforming to this CID are interchangeable/ substitutable with cable and conduit assemblies conforming to MS53058A(MO), dated 16 December 1964.

5.5 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

MILITARY ACTIVITY:

Custodian:
Army – AT

Review activity:
DLA – CS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing activity:
Army - AT

(Project 2530-0360)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.