INCH-POUND
A-A-52503B
January 12, 2010
SUPERSEDING
A-A-52503A
December 23, 1997

COMMERCIAL ITEM DESCRIPTION

MIRROR AND BRACKET ASSEMBLY, REARVIEW

The General Services Administration has authorized the use of this commercial item description (CID), for all federal agencies.

1. SCOPE. This CID covers requirements for exterior mounted military truck rear view mirror assemblies, known hereafter as "assembly".

2. CLASSIFICATION. Assemblies shall be of the following types:

Type I - Single plane mirror.
Type II - Combination mirror (plane and convex).


3. SALIENT CHARACTERISTICS.

3.1 Design, materials, and manufacturing processes. Unless otherwise specified (see 7.3), the design, materials, and manufacturing process selected shall be the prerogative of the contractor as long as all articles submitted to the government fully meet the operating, interface, ownership and support, and operating environment requirements specified.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DAMI_STANDARDIZATION@conus.army.mil or U.S. Army RDECOM, Tank Automotive Research, Development and Engineering Center, ATTN: RDTA-EN/STND/TRANS MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A FSC 2540

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

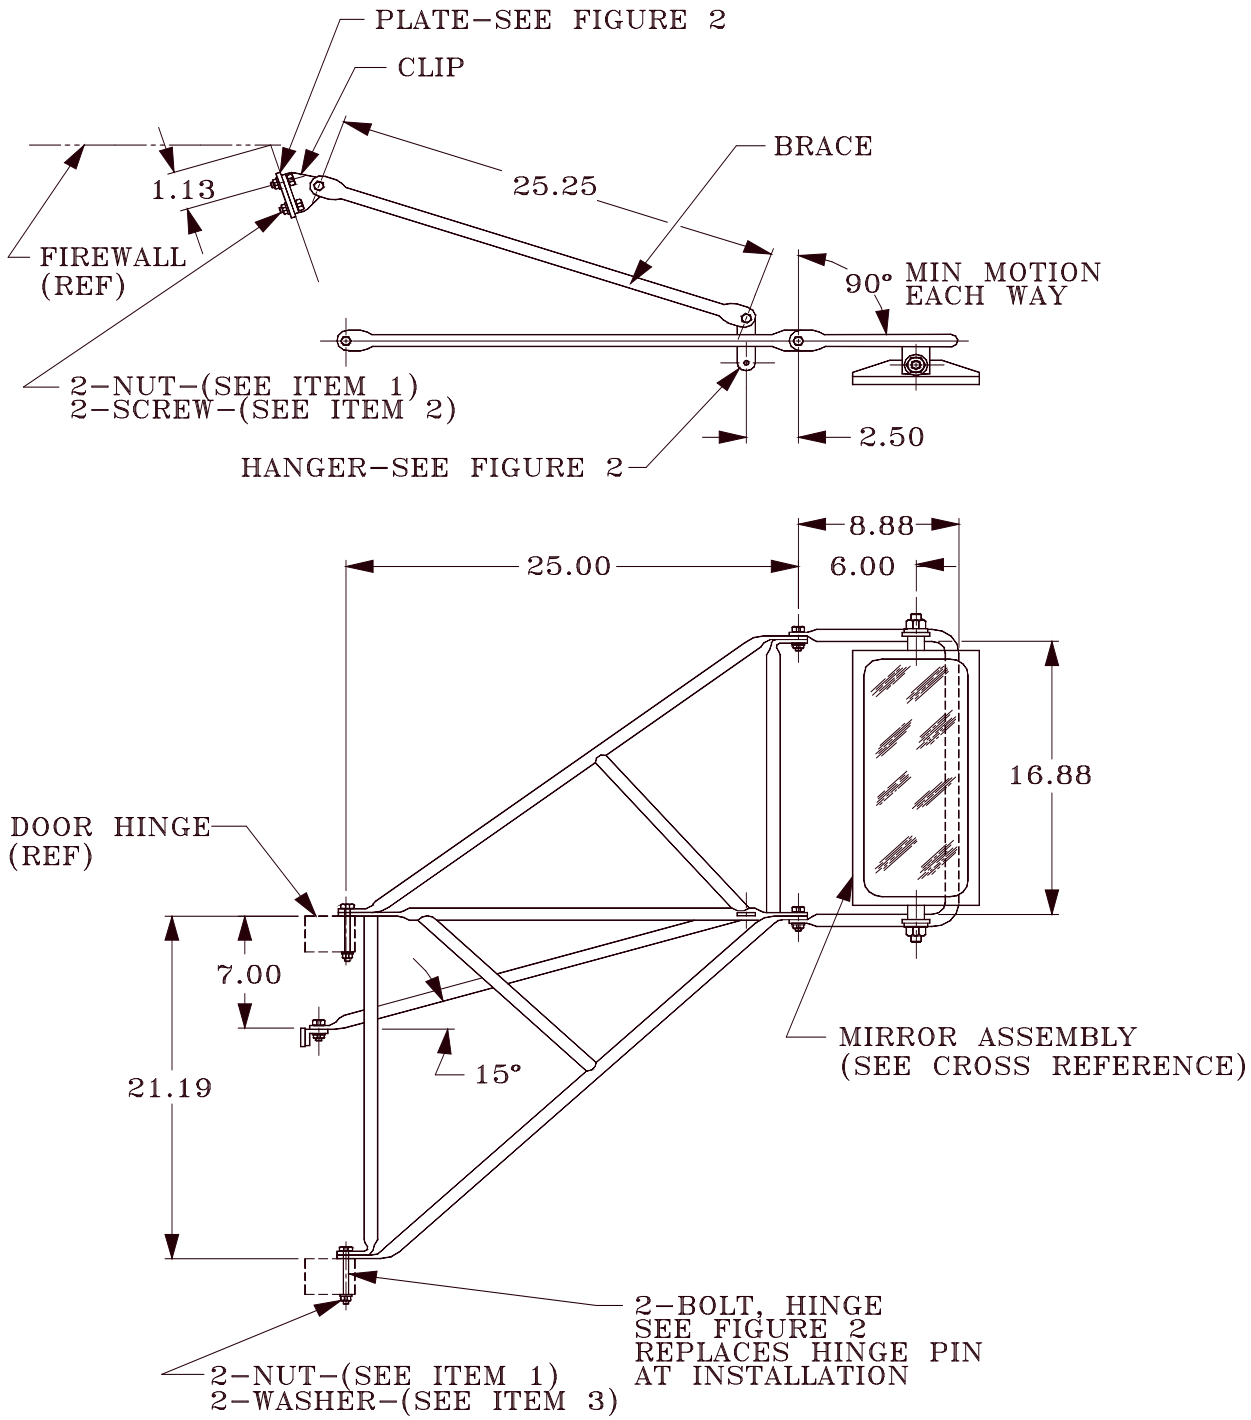


NOTE: AA52503-1 R SHOWN

FIGURE 1. Assembly design and construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

NOTES: 1. Dimensions are in inches. Tolerances are ±.03 on decimals and ±1° on angles unless otherwise specified (see 7.3).
2. All burrs and sharp edges should be removed.
3. This figure is not intended to limit construction or design solutions.

FIGURE 1. Assembly design and construction - Continued.

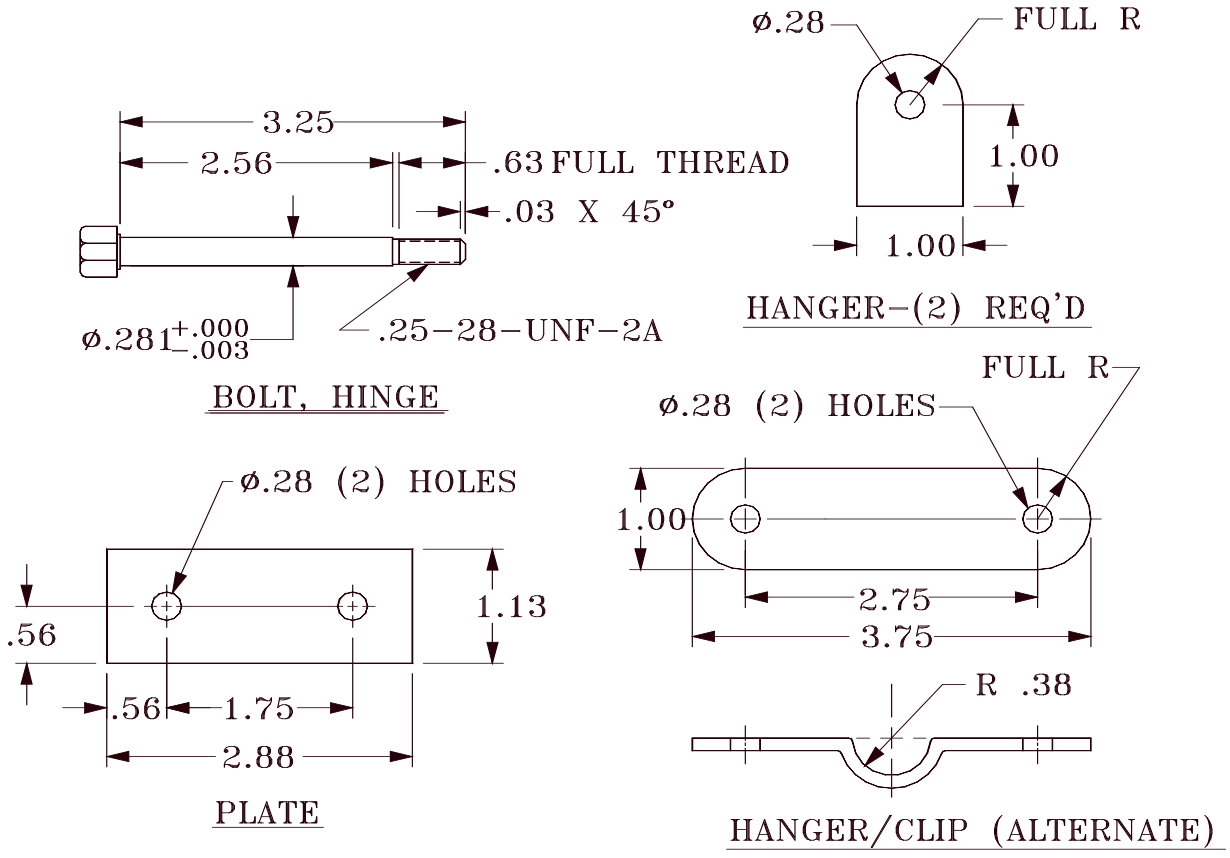

NOTES: 1. Dimensions are in inches. Tolerances are ±.03 on decimals and ±1° on angles unless otherwise specified (see 7.3).
2. All burrs and sharp edges should be removed.
3. The internal bend radii for the hanger is .06 (R) inches, typical.
4. This figure is not intended to limit construction or design solutions.

FIGURE 2. Hanger and plate(s) design and configuration.

3.1.1 Design interface. The assembly shall fully interface with the A-A-52432 (mirror assembly). The assembly shall conform to the envelope, interface, and mounting dimensions as shown in figures 1 and 2.

3.2 Corrosion resistance. The assembly shall show no evidence of corrosion when tested in accordance with ASTM B117.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

3.2.1 Topcoat color. The final topcoat color of the assembly shall match green 383, #34094 of FED-STD-595 unless otherwise specified, and shall resist the absorption of liquid chemical agents (see 7.3 and 7.4).

3.3 Hazardous material. The assembly shall not produce any hazards to personnel or the environment resulting from the use of asbestos or cadmium.

3.4 Identification and marking. Identification and marking of the assembly shall be permanent and legible and shall include, as a minimum, the manufacturer's CAGE code and the part identification number (PIN) (see 7.1 and 7.3).

4. REGULATORY REQUIREMENTS.

The offeror/contractor is encouraged to use recovered material to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.


6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3).

7. NOTES.

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

7.1 Part or identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for assemblies acquired to this CID are as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

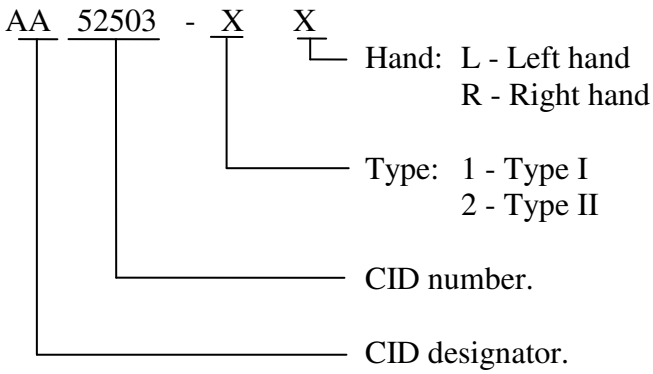

7.2 Source of documents.

7.2.1 Government documents. Copies of CID A-A-52432 "Mirror Assembly, Rearview: Automotive Exterior Mounting" and FED-STD-595 "Colors Used in Government Procurement" are available from the Defense Printing Service Detachment Office, Bldg. 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094 or http://assist.daps.dla.mil/quicksearch/. The Federal Acquisition Regulation (FAR) may be obtained at the following website: http://www.acquisition.gov/far/.

7.2.2 Non-Government publications. Copies of ASTM B117 "Standard Practice for Operating Salt Spray (Fog) Apparatus" (DoD adopted) are available from the American Society For Testing & Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or at http://www.astm.org.

7.3 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. If required, the specific issue of individual documents referenced.
c. If design, materials, and manufacturing process other than specified (see 3.1).
d. Color if other than specified (see 3.2.1).
e. PIN of assembly to be furnished and quantity required (see 3.4 and 7.1).
f. Selection of applicable level and packaging requirements (see 6).

7.4 CARC. The primers and paints which resist chemical agents and meet military needs is Chemical Agent Resistant Coating (CARC) painting system index. They may be selected from Drawing Number 12369000 for internal and external applications for tactical military vehicles and components. Copies of Army Drawing Number 12369000 are available from the U.S. Army Tank-automotive and Armaments Command, ATTN: RDTA-EN, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

7.5 Cross-reference. The following table lists the relationship of former army drawings, MS part numbers, present sub-assembly (CID), and this present assembly of the rearview mirror and bracket (CID).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

CROSS REFERENCE			
PIN Number	Former MS Part Number	Former Army Drawing Number	Mirror Part Number (CID A-A-52432)
AA52503-1 R	MS53016-1	7018838	AA52432-2-R
AA52503-1 L	MS53016-2	7018839	AA52432-2-L
AA52503-2 R	MS53016-3	7018838	AA52432-3 R
AA52503-2 L	MS53016-4	7018839	AA52432-3 L

7.6 Optional material. These materials have been used in the past to meet the physical properties and performance needed for this assembly. The following table lists the components, materials, and other detailed features.

COMPONENT TABLE (optional material)		
Item	Description	Replacement Part Number
1.	Nut. Self-Locking, Hexagon, Steel, Zinc Plated, Non-Metallic Insert .250-28UNF-3B Thread.	NAMS21044-N4
2.	Screw, Cap, Hexagon Head, Steel, Zinc Plated, Grade 5, .250-28UNF-2A Thread, .875 inch long.	None
3.	Washer, Flat, Round, Steel, Zinc Plated, .281 Inside Diameter, .625 Outside Diameter, .065 Thick.	MS27183-10
4.	Bolt, Hinge, Hexagon, Carbon Steel, Zinc Plated (per ASTM B633, type II, III, or IV, thickness class SC3 or SC4), Grade 5 (Equal to SAE J429), (see figure 2).	None
5.	Hanger, Cold Rolled or Hot Rolled Pickled and Oiled, Carbon Steel - G10090 through G10200 (from the United Numbering System (UNS)), .125 in. thick.	None
6.	Plate, Cold Rolled or Hot Rolled Pickled and Oiled, Carbon Steel - G10090 through G10200 (from the United Numbering System (UNS)), .125 in. thick.	None
7.	Hanger/Clip, Cold Rolled or Hot Rolled Pickled and Oiled, Carbon Steel - G10090 through G10200 (from the United Numbering System (UNS)), .125 in. thick.	None
8.	Tubing, Either, Annealed, Seamless, or Welded, Carbon Steel (per ASTM A512, A513, or A519), .75 in. Outside Diameter (O.D.), .065 in. Minimum Wall Thickness,	None

NOTE: Except for items 1 through 4, all components in the assembly have historically been treated for corrosion resistance as follows: either zinc electroplated per ASTM B633 - type II, III, or IV-thickness class SC4, or hot dip zinc per ASTM A123/A123M - thickness grade 45, then conversion coated per ASTM D6386, method 5.4.2 , with a coating weight of 500-1100 mg/ft2, plus thick film trivalent chromium sealer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - MC
Air Force -99

Preparing Activity:
Army - AT

(Project 2540-2010-001)

Review Activity:
DLA-CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.