
COMMERCIAL ITEM DESCRIPTION

FUSE CARTRIDGE, SEMICONDUCTOR TYPE, 130 VOLTS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies

1. SCOPE. This CID covers the general requirements for 130 volt semiconductor fuse cartridges Fuse cartridges covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

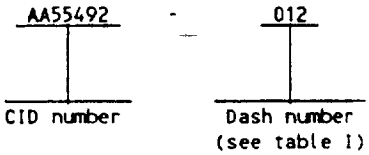

3. SALIENT CHARACTERISTICS

3 1 Design and construction Fuse cartridges supplied to this CID shall be as specified herein (see figure 1)

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating The voltage rating shall be 130 V ac maximum

3 4 Short circuit interrupt rating. The short circuit interrupt rating shall be 100,000 amperes RMS symmetrical.


3 5 Maximum current clearing I^2t. The maximum current clearing I^2t shall be as specified in table I.

3.6 Marking Fuse cartridges supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

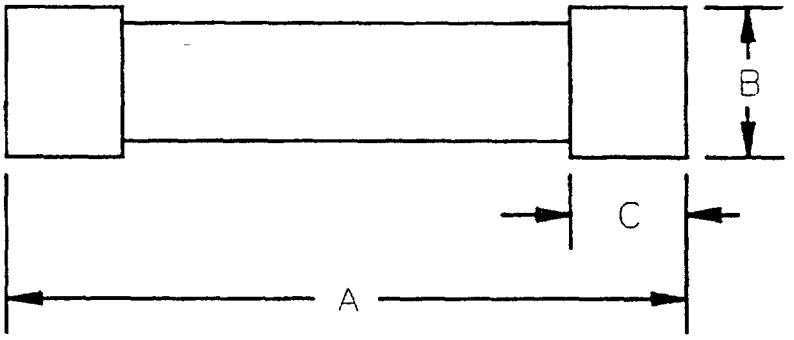


AA55492-	Dimensions		
	A	B	C
001 through 006	38.10 (1.500)	10.31 (.406)	9.50 (.374)
007 through 011	50.80 (2.000)	20.60 (811)	16.03 (.631) 12 57 (.495)

Configuration I

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ± 0 13 mm (0.005 inch), unless otherwise specified.
3. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1 Configuration and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

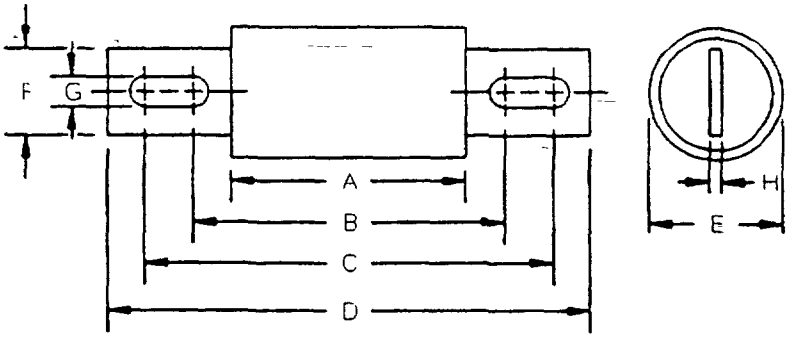

AA55492-	Dimensions							
	A	B	C	D	E	F	G	H
012 through 021	29.38 (1.157)	48.01 (1.890)	55.73 (2.194) 54.64 (2 151)	67.48 (2 657)	28.71 (1 130) 25.27 (.995)	22.36 (880) 18.92 (.745)	8.43 (.332) 7.77 (.306)	4.78 (.188)

Configuration II

NOTES.
1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (0.005 inch), unless otherwise specified.
3. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 2. Configuration and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics

AA55492-	Ampere rating	I^2t (A^2s)	AA55492-	Ampere rating	I^2t (A^2s)
001	5	7	012	70	19,000
002	10	12	013	80	30,000
003	15	37	014	100	41,000
004	20	95	015	125	55,000
005	25	170	016	150	63,000
006	30	300	017	200	80,000
007	35	400	018	250	110,000
008	40	600	019	300	190,000
009	45	800	020	350	280,000
010	50	1,100	021	400	325,000
011	60	1,500			

4 QUALITY ASSURANCE PROVISIONS

4 1 Contractor certification The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Certificate of compliance Each contractor desiring to be listed as a suggested source of supply shall submit a DESC certificate of compliance to DESC-ELDM This certificate shall state that the contractor's product meets all the requirements of this CID. In addition, a certificate of compliance shall accompany all fuse cartridges supplied to this CID

4 3 Market acceptability The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID

a The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years

b The company must have sold 1,000 units meeting this CID in the commercial market place over the past 2 years

5. PACKAGING

5.1 Preservation, packing, and marking Preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

6 NOTES

6 1 PIN The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example

6.2 Government users To acquire information on obtaining these semiconductor fuses from the Government inventory system, please contact Defense Electronics Supply Center, ATTN DESC-EQM, 1507 Wilmington Pike, Dayton, OH 45444-5270, or telephone (513) 296-5106.

6 3 Ordering data The contract or order should specify the following

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. If a bid sample is required

d. Packaging requirements.

6.4 Suggested sources of supply. Suggested sources of supply are listed below Additional sources will be added as they become available. The vendors listed have submitted a certificate of compliance to DESC-ELDM and meet the market acceptability requirements of this CID.

CID dash number (see table I) AA55492-	Vendor commercial PIN CAGE 12092	Vendor commercial PIN CAGE 71400	Vendor commercial PIN CAGE 75915
001	A015F005	---	L13S5
002	A015F010	---	L13S10
003	A015F015	---	L13S15
004	A015F020	---	L13S20
005	A015F025	---	L13S25
006	A015F030	---	L13S30
007	A015F035	---	L13S35
008	A015F040	---	L13S40
009	A015F045	---	L13S45
010	A015F050	---	L13S50
011	A015F060	---	L13S60
012	A015R070	---	L13S70
013	A015R080	---	L13S80
014	A015R100	---	L13S100
015	A015R125	KAA 125	L13S125
016	A015R150	KAA 150	L13S150
017	A015R200	KAA 200	L13S200
018	A015R250	KAA 250	L13S250
019	A015R300	KAA 300	L13S300
020	A015R350	KAA 350	L13S350
021	A015R400	KAA 400	L13S400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

Vendor CAGE number	Vendor name and address
12092	Carbone Lorraine, Incorporated 14 Eastmans Road Parsippany, NJ 07054 3703 (201) 428-8400
71400	Bussmann P O Box 14460 St Louis, MO 63178-4460 (314) 394-2877
75915	Littelfuse, Incorporated 800 E Northwest Highway Des Plaines, IL 60016-3096 (312) 824-1188

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY

DLA-ES

Project 5920-D214

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.