[INCH-POUND]
A-A-55494A
October 3, 1997
SUPERSEDING
A-A-55494
February 3, 1995

COMMERCIAL ITEM DESCRIPTION

# FUSE CARTRIDGE, SEMICONDUCTOR TYPE, 250 VOLTS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for 250 volt semiconductor type fuse cartridges. Fuse cartridges covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

AA55494 - 001

AA55494: CID number
001: Dash number (see table I)

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. Fuse cartridges supplied to this CID shall be as specified herein (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 250 V ac maximum.

3.4 Short circuit interrupt rating. The short circuit interrupt shall be 200,000 amperes root mean square (RMS) symmetrical.

3.5 Maximum current clearing $I^2t$. The maximum current clearing $I^2t$ shall be as specified in table I.

3.6 Marking. Fuse cartridges supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAM, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.




| AA55494- | Dimensions | | |
|---|---|---|---|
| | A | B | C |
| 001 through 006 | 50.80 (2.00) | 14.30 (.563) | 12.83 (.505)<br>10.98 (.432) |

Configuration I.

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (0.005 inch), unless otherwise specified.
3. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 1. Configuration and dimensions.

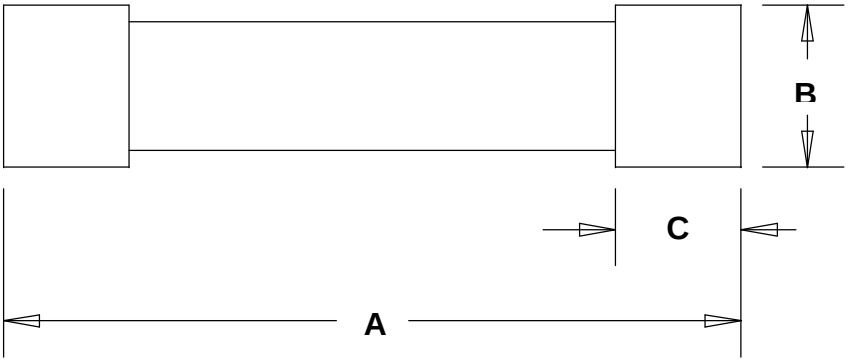

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.




| AA55494- | Dimensions | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G | H |
| 007 through 011 | 41.43 (1.631) 39.56 (1.557) | 57.18 (2.251) | 66.03 (2.600) 63.37 (2.495) | 80.98 (3.188) | 20.65 (.813) | 19.18 (.755) 15.77 (.621) | 8.72 (.343) | 3.19 (.188) |
| 012 through 017 | 41.43 (1.631) 4.037 (1.589) | 59.26 (2.333) 55.47 (2.184) | 61.90 (2.437) | 79.39 (3.126) | 30.97 (1.219) | 25.41 (1.000) 19.04 (.750) | 8.87 (.349) 7.80 (.307) | 4.78 (1.88) |
| 018 through 023 | 40.49 (1.594) | 61.25 (2.41) 57.07 (2.247) | 74.73 (2.942) 73.67 (2.900) | 97.62 (3.843) | 38.10 (1.5) | 25.40 (1.0) | 10.31 (.406) | 6.38 (.251) |

Configuration II.

NOTES:
1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (0.005 inch), unless otherwise specified.
3. The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

Figure 2. Configuration and dimensions.

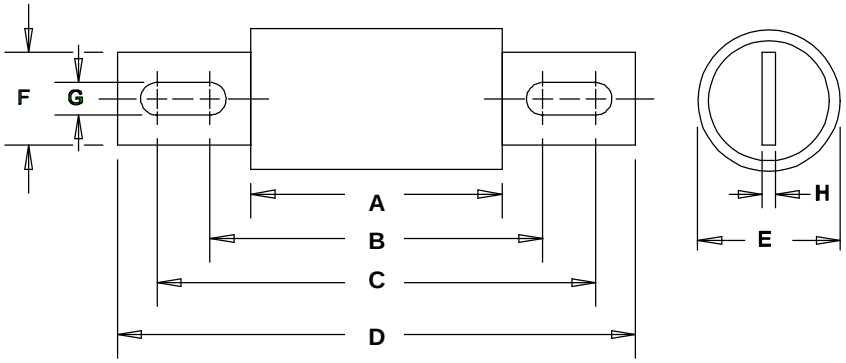

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

| AA55494- | Ampere rating | $I^2t$ ($A^2s$) | AA55494- | Ampere rating | $I^2t$ ($A^2s$) |
|---|---|---|---|---|---|
| 001 | 5 | 100 | 013 | 80 | 3,000 |
| 002 | 10 | 200 | 014 | 100 | 5,000 |
| 003 | 15 | 250 | 015 | 125 | 7,500 |
| 004 | 20 | 300 | 016 | 150 | 12,000 |
| 005 | 25 | 350 | 017 | 200 | 20,000 |
| 006 | 30 | 390 | 018 | 250 | 38,000 |
| 007 | 35 | 460 | 019 | 300 | 55,000 |
| 008 | 40 | 560 | 020 | 350 | 73,000 |
| 009 | 45 | 720 | 021 | 400 | 100,000 |
| 010 | 50 | 880 | 022 | 500 | 190,000 |
| 011 | 60 | 1,300 | 023 | 600 | 260,000 |
| 012 | 70 | 2,200 | | | |

4. REGULATORY REQUIREMENTS.

4.1 Recycled/recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID.

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company must have sold 1,000 units meeting this CID in the commercial market place over the past 2 years.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

6. PACKAGING.

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these semiconductor fuses to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents. This section is not applicable to this CID.

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. Packaging requirements.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| Manufacturer's CAGE | Manufacturer's name and address |
|---|---|
| 067U2 | Den Mar Transit Industrial Fuses<br>10488 S. W. 211 Street<br>Miami, FL 33189-3000<br>(305) 235-1000 |
| 12092 | Carbone Lorraine, Incorporated<br>14 Eastmans Road<br>Parsippany, NJ 07054-3703<br>(201) 428-8400 |
| 71400 | Bussmann<br>P.O. Box 14460<br>St. Louis, MO 63178-4460<br>(314) 394-2877 |
| 75915 | Littelfuse, Incorporated<br>800 E. Northwest Highway<br>Des Plaines, IL 60016-3096<br>(312) 824-1188 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

7.6 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

| CID dash number (see table I) AA55494- | Vendor Commercial P/N 1/ | | | |
|---|---|---|---|---|
| | CAGE 067U2 | CAGE 12092 | CAGE 71400 | CAGE 75915 |
| 001 | UFR25X005 | A025R005 | FWX 5A | L25S5 |
| 002 | UFR25X010 | A025R010 | FWX 10A | L25S10 |
| 003 | UFR25X015 | A025R015 | FWX 15A | L25S15 |
| 004 | UFR25X020 | A025R020 | FWX 20A | L25S20 |
| 005 | UFR25X025 | A025R025 | FWX 25A | L25S25 |
| 006 | UFR25X030 | A025R030 | FWX 30A | L25S30 |
| 007 | UFR25X035 | A025R035 | FWX 35A | L25S35 |
| 008 | UFR25X040 | A025R040 | FWX 40A | L25S40 |
| 009 | UFR25X045 | A025R045 | FWX 45A | L25S45 |
| 010 | UFR25X050 | A025R050 | FWX 50A | L25S50 |
| 011 | UFR25X060 | A025R060 | FWX 60A | L25S60 |
| 012 | UFR25X070 | A025R070 | FWX 70A | L25S70 |
| 013 | UFR25X080 | A025R080 | FWX 80A | L25S80 |
| 014 | UFR25X100 | A025R100 | FWX 100A | L25S100 |
| 015 | UFR25X125 | A025R125 | FWX 125A | L25S125 |
| 016 | UFR25X150 | A025R150 | FWX 150A | L25S150 |
| 017 | UFR25X200 | A025R200 | FWX 200A | L25S200 |
| 018 | UFR25X250 | A025R250 | FWX 250A | L25S250 |
| 019 | UFR25X300 | A025R300 | FWX 300A | L25S300 |
| 020 | UFR25X350 | A025R350 | FWX 350A | L25S350 |
| 021 | UFR25X400 | A025R400 | FWX 400A | L25S400 |
| 022 | UFR25X500 | A025R500 | FWX 500A | L25S500 |
| 023 | UFR25X600 | A025R600 | FWX 600A | L25S600 |

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.7 Government users. To acquire information on obtaining these fuses from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CM, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7884.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5920-0550



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.