[INCH-POUND]
A-A-55497A
April 17, 2000
SUPERSEDING
A-A-55497
March 7, 1994


COMMERCIAL ITEM DESCRIPTION

FUSE LINK, ELECTRICAL, TYPE K (FAST)

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a type K (fast) fuse link. Fuse links covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

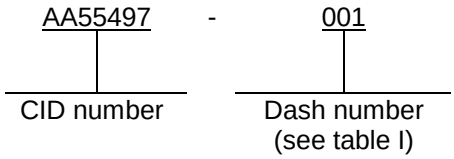

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuse links supplied to this CID shall be as specified herein and shall meet the requirements of ANSI C37.42 for type K (fast) fuse links (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 27 kilovolts ac maximum.

3.4 Melting-time-current characteristics. The melting-time-current characteristics shall be in accordance with ANSI C37.42 for type K fuse links.

3.5 Minimum overall length. The minimum overall length shall be as specified in table I.


3.6 Marking. Fuse links supplied to this CID shall be marked with the manufacturer's (MFR) standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

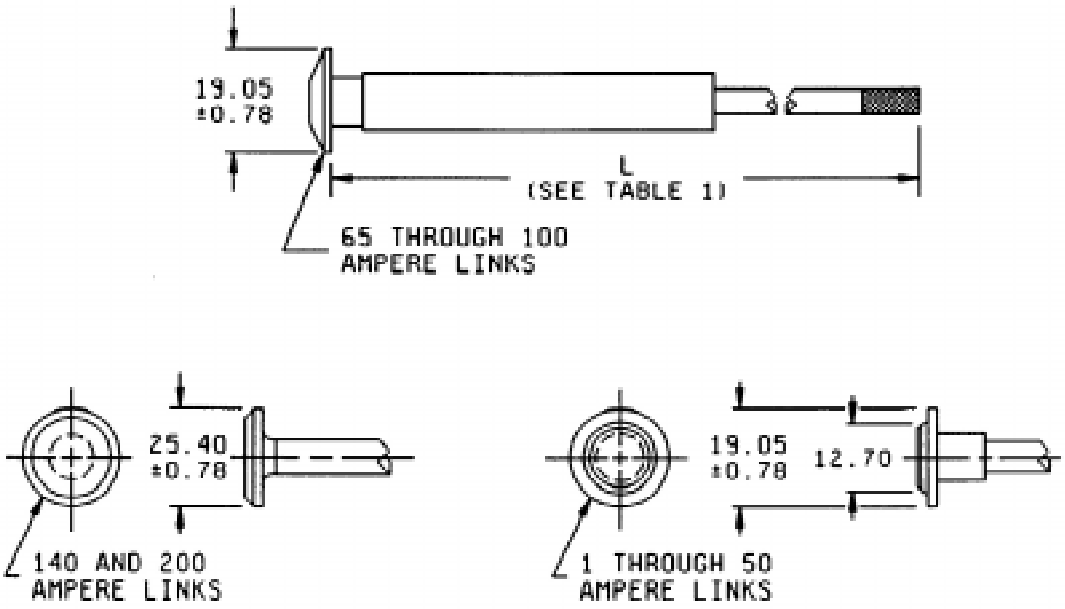

mm	Inches
0.78	.030
12.70	.500
19.05	.750
25.40	1.000

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (0.005 inch), unless otherwise specified.
3. The US Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

CID dash number A-A-55497-	Ampere rating	Minimum overall length L mm (inches)	CID dash number A-A-55497-	Ampere rating	Minimum overall length L mm (inches)
001	1	584.20 (23)	019	1	660.40 (26)
002	2		020	2	
003	3		021	3	
004	6		022	6	
005	8		023	8	
006	10		024	10	
007	12		025	12	
008	15		026	15	
009	20		027	20	
010	25		028	25	
011	30		029	30	
012	40		030	40	
013	50		031	50	
014	65		032	65	
015	80		033	80	
016	100		034	100	
017	140		035	140	
018	200		036	200	

REGULATORY REQUIREMENTS.

4.1 Recycled/recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 6 months.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 6 months.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

6. PACKAGING.

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuse links to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

Other Publications

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C37.42- High Voltage Expulsion Type Distribution Class Fuses, Cutouts, Fuse Disconnecting Switches and Fuse Links, Specification for.

(Applications for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, NY 10036-8002.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. Packaging requirements.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer's CAGE	Manufacturer's name and address
71400	Cooper Industries, Incorporated Cooper Power Systems P.O. Box 1640 Waukesha, WI 53187-1640 (262) 524-3300
0RUR0	Hubbell Power Systems, Incorporated A. B. Chance Company 210 North Allen Street Centralia, MO 65240-1395 (573) 682-5521

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

7.6 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I) A-A-55497-	Vendor commercial PIN CAGE 64916	Vendor commercial PIN CAGE 64916	Vendor commercial PIN CAGE 0RUR0
001	31001	---	CM1K23
002	31002	---	CM2K23
003	31003	---	CM3K23
004	31006	---	CM6K23
005	31008	FL12K8	CM8K23
006	31010	FL12K10	CM10K23
007	31012	FL12K12	CM12K23
008	31015	FL12K15	CM15K23
009	31020	FL12K20	CM20K23
010	31025	FL12K25	CM25K23
011	31030	FL12K30	CM30K23
012	31040	FL12K40	CM40K23
013	31050	FL12K50	CM50K23
014	31065	FL12K65	CM65K23
015	31080	FL12K80	CM80K23
016	31100	FL12K100	CM100K23
017	31140	---	CM140K23
018	31200	---	CM200K23
019	31001-29	---	CM1K26
020	31002-29	---	CM2K26
021	31003-29	---	CM3K26
022	31006-29	---	CM6K26
023	31008-29	---	CM8K26
024	31010-29	---	CM10K26
025	31012-29	---	CM12K26
026	31015-29	---	CM15K26
027	31020-29	---	CM20K26
028	31025-29	---	CM25K26
029	31030-29	---	CM30K26
030	31040-29	---	CM40K26

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

TABLE II. P/N supersession data – Continued.

CID dash number (see table I) A-A-55497-	Vendor commercial PIN CAGE 64916	Vendor commercial PIN CAGE 64916	Vendor commercial PIN CAGE 0RUR0
031	31050-29	---	CM50K26
032	31065-29	---	CM65K26
033	31080-29	---	CM80K26
034	31100-29	---	CM100K26
035	311040-29	---	CM140K26
036	31200-29	---	CM200K26

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.7 Government users. To acquire information on obtaining these fuse links from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CS, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7990.

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5920-D241

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.