[INCH-POUND]
A-A-55498A
April 17, 2000
SUPERSEDING
A-A-55498
March 7, 1994


COMMERCIAL ITEM DESCRIPTION

FUSE LINK, ELECTRICAL, TYPE T (SLOW)

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a type T (slow) fuse link. Fuse links covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7.1).

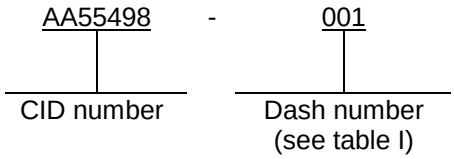

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Fuse links supplied to this CID shall be as specified herein and shall meet the requirements of ANSI C37.42 for type T (slow) fuse links (see figure 1).

3.2 Ampere rating. The ampere rating shall be as specified in table I.

3.3 Voltage rating. The voltage rating shall be 27 kilovolts ac maximum.

3.4 Melting-time-current characteristics. The melting-time-current characteristics shall be in accordance with ANSI C37.42 for type T fuse links.

3.5 Minimum overall length. The minimum overall length shall be as specified in table I.


3.6 Marking. Fuse links supplied to this CID shall be marked with the manufacturer's (MFR) standard commercial PIN.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-0548, or facsimile (FAX) (614) 692-6939.

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

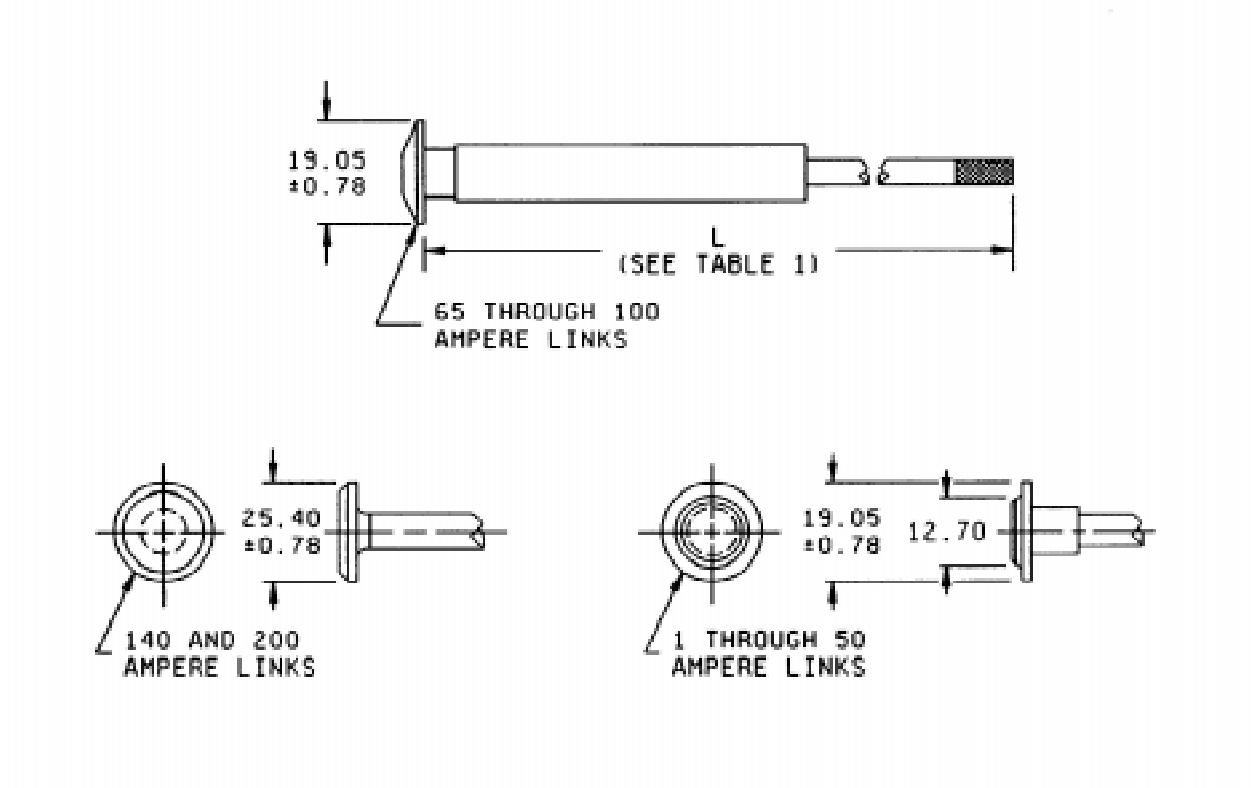

mm	Inches
0.78	.030
12.70	.500
19.05	.750
25.40	1.000

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ± 0.13 mm (0.005 inch), unless otherwise specified.
3. The US Government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

CID dash number A-A-55498-	Ampere rating	Minimum overall length L mm (inches)	CID dash number A-A-55498-	Ampere rating	Minimum overall length L mm (inches)
001	1	584.20 (23)	019	1	660.40 (26)
002	2		020	2	
003	3		021	3	
004	6		022	6	
005	8		023	8	
006	10		024	10	
007	12		025	12	
008	15		026	15	
009	20		027	20	
010	25		028	25	
011	30		029	30	
012	40		030	40	
013	50		031	50	
014	65		032	65	
015	80		033	80	
016	100		034	100	
017	140		035	140	
018	200		036	200	

REGULATORY REQUIREMENTS.

4.1 Recycled/recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 6 months.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 6 months.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

6. PACKAGING.

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these fuse links to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.3 Source of documents.

Other Publications

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI C37.42- High Voltage Expulsion Type Distribution Class Fuses, Cutouts, Fuse Disconnecting Switches and Fuse Links, Specification for.

(Applications for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, NY 10036-8002.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. Packaging requirements.

7.5 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer's CAGE	Manufacturer's name and address
71400	Cooper Industries, Incorporated Cooper Power Systems P.O. Box 1640 Waukesha, WI 53187-1640 (262) 524-3300
0RUR0	Hubbell Power Systems, Incorporated A. B. Chance Company 210 North Allen Street Centralia, MO 65240-1395 (573) 682-5521

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

7.6 Part number (P/N) supersession data. This CID supersedes the following manufacturers' P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I) A-A-55498-	Vendor commercial PIN CAGE 64916	Vendor commercial PIN CAGE 64916	Vendor commercial PIN CAGE 0RUR0
001	51001	---	CM1T23
002	51002	---	CM2T23
003	51003	---	CM3T23
004	51006	FL11T6	CM6T23
005	51008	FL11T8	CM8T23
006	51010	FL11T10	CM10T23
007	51012	FL11T12	CM12T23
008	51015	FL11T15	CM15T23
009	51020	FL11T20	CM20T23
010	51025	FL11T25	CM25T23
011	51030	FL11T30	CM30T23
012	51040	FL11T40	CM40T23
013	51050	FL11T50	CM50T23
014	51065	FL11T65	CM65T23
015	51080	FL11T80	CM80T23
016	51100	FL11T100	CM100T23
017	51140	FL11T140	CM140T23
018	51200	FL11T200	CM200T23
019	51001-29	---	CM1T26
020	51002-29	---	CM2T26
021	51003-29	---	CM3T26
022	51006-29	---	CM6T26
023	51008-29	---	CM8T26
024	51010-29	---	CM10T26
025	51012-29	---	CM12T26
026	51015-29	---	CM15T26
027	51020-29	---	CM20T26
028	51025-29	---	CM25T26
029	51030-29	---	CM30T26
030	51040-29	---	CM40T26

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.

TABLE II. P/N supersession data – Continued.

CID dash number (see table I) A-A-55498-	Vendor commercial PIN CAGE 64916	Vendor commercial PIN CAGE 64916	Vendor commercial PIN CAGE 0RUR0
031	51050-29	---	CM50T26
032	51065-29	---	CM65T26
033	51080-29	---	CM80T26
034	51100-29	---	CM100T26
035	511040-29	---	CM140T26
036	51200-29	---	CM200T26

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

7.7 Government users. To acquire information on obtaining these fuse links from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CS, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7990.

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-CC

Project 5920-D242

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:49Z
Check the source to verify that this is the current version before use.