
Review activities: Air Force - 11
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MS 123120 THRU MS 123150 (USAF)

FED. SUP CLASS 5365

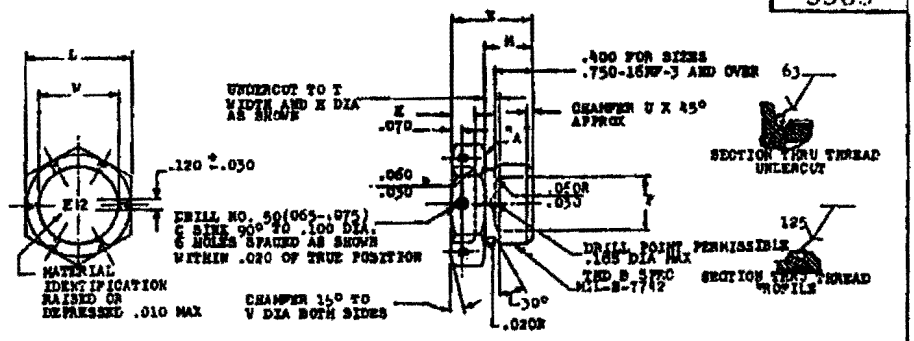

THD &		E	H DIA	J	K	L	M	P DIA	T	U	V DIA	W	WT.* LBS.	PART NO.
.250 -28	UNF-3	.540	.155- .160	.013	.130	.431- .440	.320	--	.080-.095	.020-.050	.438	.250	.0037	MS123120
3125-24	UNF-3	.580	.219- .224	.017	.130	.555- .564	.360	--	.082-.097	.020-.050	.562	.312	.0066	MS123121
.375 -24	UNF-3	.590	.285- .290	.019	.130	.618- .627	.380	--	.073-.088	.020-.050	.625	.375	.0085	MS123122
.4375-20	UNF-3	.610	.348- .353	.021	.130	.681- .690	.400	--	.076-.091	.030-.050	.688	.438	.0116	MS123123
.500 -20	UNF-3	.650	.411- .416	.025	.130	.743- .752	.400	--	.076-.091	.030-.050	.750	.500	.0139	MS123124
.5625-18	UNF-3	.660	.418- .423	.024	.130	.805- .814	.400	--	.126-.141	.040-.070	.812	.562	.0190	MS123125
.625 -18	UNF-3	.730	.480- .485	.026	.160	.868- .877	.440	--	.126-.141	.040-.070	.875	.625	.0228	MS123126
.750 -16	UNF-3	.730	.606- .611	.030	.160	.993-1.002	.440	.950	.120-.135	.040-.070	1.000	.750	.0309	MS123127
.875 -14	UNF-3	.740	.727- .732	.030	.160	1.118-1.127	.440	.375	.122-.137	.050-.080	1.125	.875	.0414	MS123128
1.000 -14	UNF-3	.780	.859- .864	.030	.200	1.243-1.252	.440	.500	.112-.127	.050-.080	1.250	1.000	.0543	MS123129
1.0625-12	N-3	.830	.865- .870	.030	.200	1.368-1.377	.480	.562	.157-.172	.050-.080	1.375	1.062	.0602	MS123130
1.125 -12	N-3	.830	.928- .933	.030	.200	1.431-1.440	.480	.625	.157-.172	.050-.080	1.438	1.125	.0650	MS123131
1.250 -12	N-3	.840	1.053-1.055	.030	.200	1.555-1.564	.480	.750	.157-.172	.050-.080	1.562	1.250	.0728	MS123132
1.3125-12	N-3	.840	1.114-1.119	.030	.200	1.618-1.627	.480	.812	.157-.172	.050-.080	1.625	1.312	.0790	MS123133
1.375 -12	N-3	.840	1.175-1.180	.030	.200	1.681-1.690	.480	.875	.157-.172	.050-.080	1.688	1.375	.0844	MS123134
1.500 -12	N-3	.850	1.303-1.308	.030	.200	1.743-1.752	.480	.984	.157-.172	.050-.080	1.750	1.438	.0935	MS123135
1.625 -12	N-3	.850	1.428-1.433	.050	.200	1.931-1.940	.480	1.125	.157-.172	.050-.080	1.938	1.625	.1058	MS123136
1.750 -12	N-3	.850	1.553-1.558	.050	.200	2.054-2.064	.480	1.250	.157-.172	.050-.080	2.062	1.750	.1182	MS123137
1.875 -12	N-3	.860	1.675-1.680	.050	.200	2.180-2.190	.480	1.375	.157-.172	.050-.080	2.188	1.875	.1300	MS123138
2.000 -12	N-3	.860	1.801-1.806	.050	.200	2.304-2.314	.480	1.500	.157-.172	.050-.080	2.312	2.000	.1432	MS123139
2.125 -12	N-3	.860	1.931-1.936	.050	.200	2.430-2.440	.480	1.625	.157-.172	.050-.080	2.438	2.125	.1573	MS123140
2.250 -12	N-3	.870	2.053-2.058	.050	.200	2.554-2.564	.480	1.750	.157-.172	.050-.080	2.562	2.250	.1715	MS123141
2.375 -12	N-3	.870	2.178-2.183	.050	.200	2.680-2.690	.480	1.875	.157-.172	.050-.080	2.688	2.375	.1857	MS123142
2.500 -12	N-3	.870	2.303-2.308	.050	.200	2.804-2.814	.480	2.000	.157-.172	.050-.080	2.812	2.500	.2030	MS123143

NOTE: (1) THE CONCENTRICITY OF THE RELIEF WITH THE THREAD PD SHALL BE WITHIN J FIR.
(2) "A" SURFACES AND PD OF THREAD MUST BE CONCENTRIC, PARALLEL, FLAT, SQUARE AND TRUE (AS APPLICABLE) TO EACH OTHER WITHIN .005 FULL INDICATOR READING UNLESS OTHERWISE SPECIFIED.

MATERIAL: ALUMINUM AMS 4120

FINISH: ANODIC TREATMENT AMS H470. DO NOT DYE.

SURFACE ROUGHNESS: AS 107

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ± .010 ANGULAR DIMENSIONS ± 2°.

DO NOT USE UNASSIGNED PART NUMBERS.

* APPROXIMATE WEIGHT LBS/EA

© REINSTATED AS AN INACTIVE STANDARD AFTER 7 JUNE 1972
NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED (A) 25 Apr 56 (B) 1 Sep 71 (C) 7 June 72

AIR FORCE-82	MILITARY STANDARD	MS 123120 THRU 123150 (USAF)
PROCUREMENT SPECIFICITY: NONE	FLUO - STRAIGHT THREAD, "O" RING SEAL, ALUMINUM	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.