
FED. SUP CLASS
2330

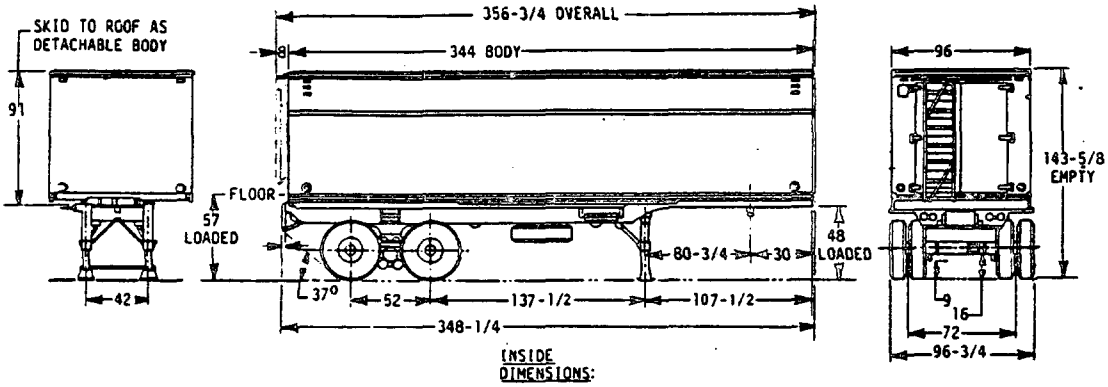

INSIDE DIMENSIONS:
WIDE - 88-1/2
HIGH - 77-1/2
LONG - 337-1/4

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK TRACTOR, 5 TON, 6x6, M52

(REFERENCE WEIGHTS FOR INFORMATION ONLY)

CURB WEIGHT: 15220 LBS.

WEIGHT DISTRIBUTION:
KING PIN 4620 LBS.
AXLE 10600 LBS.

PAYLOAD: LOADED 24000 LBS.

MAXIMUM WEIGHT: INCLUDING BODY AND PAYLOAD WITH PAYLOAD EVENLY DISTRIBUTED

KING PIN	14650 LBS.
AXLE	24570 LBS.
TOTAL	39220 LBS.

BODY AND CHASSIS ASSEMBLY: 8722259-1
THE BODY FRAME IS CONSTRUCTED OF 16 GAGE, 1-1/2 INCH SQUARE STEEL TUBING. FRONT, REAR, AND SIDE FRAMES ARE COVERED WITH RIVETED 22 GAGE CORROSION RESISTANT STEEL SHEETING ON THE OUTSIDE AND 1/4 INCH THICK, 3 PLY, DOUGLAS FIR PLYWOOD, EXTERIOR TYPE ON THE INSIDE. ROOF FRAME IS COVERED WITH RIVETED ARMCO ZINC GRIP PAINTED STEEL SHEETING. FLOOR IS CONSTRUCTED OF HARDWOOD BOARDS 1-5/16 INCHES THICK WITH STEEL WEAR STRIPS AT EACH BOARD JOINT.

CHASSIS ASSEMBLY, M126A2C: 8736683

KING PIN: 2 INCH DIA. MS53036-1

BODY: ASSEMBLY 11597626

LANDING GEAR: 11625162
ACTUATION-TWO SPEED MANUALLY OPERATED
CAPACITY 17500 LBS. PER LEG
35000 LBS. STATIC TOTAL
TRAVEL 18-7/8 IN

ELECTRICAL SYSTEM:
BODY 7018927
POTENTIAL 12 VOLTS, 24 VOLTS AND 110 VOLTS
CHASSIS 10920550
POTENTIAL 12 VOLTS AND 24 VOLTS

FRAME ASSEMBLY: REINFORCED, DROP 8724534
SIDE RAIL - WIDE FLANGE BEAM 12 X 6-1/2 X 27 LB./FT.
SECTION MODULUS - 34.1 IN^3
CROSS MEMBERS - 13

AXLE: TUBULAR TANDEM MS35866-A1
CAPACITY 36000 LBS.

SPRINGS: FLAT LEAF 7979217
SIZE - 4 WIDE X 52 LONG, 12 LEAVES
RATE - 6150 LBS. PER INCH AVERAGE

WHEELS: DUAL MS53044-6
6-11/16 OFFSET SIZE 20 X 7-1/2
RING, WHEEL MS53045-3

TIRES: 11.00X 20 12 PLY
TREAD DESIGN - NDCC TUBE MS35392-15

BRAKES: SERVICE 8739454-1
SIZE - 16-1/2 X 5-1/2
ACTUATION - AIR-OVER HYDRAULIC
EMERGENCY RELAY VALVE MS53004-1
AIR RESERVOIR 6169300

TIE DOWNS: (8) 7979180
2 EACH SIDE, 2 FRONT AND 2 REAR

CHOCK BLOCKS: (2) MS52127-3

LADDER: MS500062-G1

FORDING DEPTH: 55 INCHES

MAXIMUM TOWING SPEED:
LOADED 20 MPH
HIGHWAY 50 MPH

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.
4. SUBJECT OF NATO STANAG 2805-A (EDITION 3). DO NOT REVISE OR CHANGE.

© ENTIRE STANDARD REVISED

MS PART NO.
MS500097-1

ENGINEERING DWG NO.
8736685

APPROVED 5 SEP 1968 REVISED © 13 JAN 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC - N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, VAN—CARGO, 12 TON, 4 WHEEL, M128A2C	MILITARY STANDARD MS500097(AT)
PROCUREMENT SPECIFICATION MIL-T-62034	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.