
FED. SUP CLASS
2330

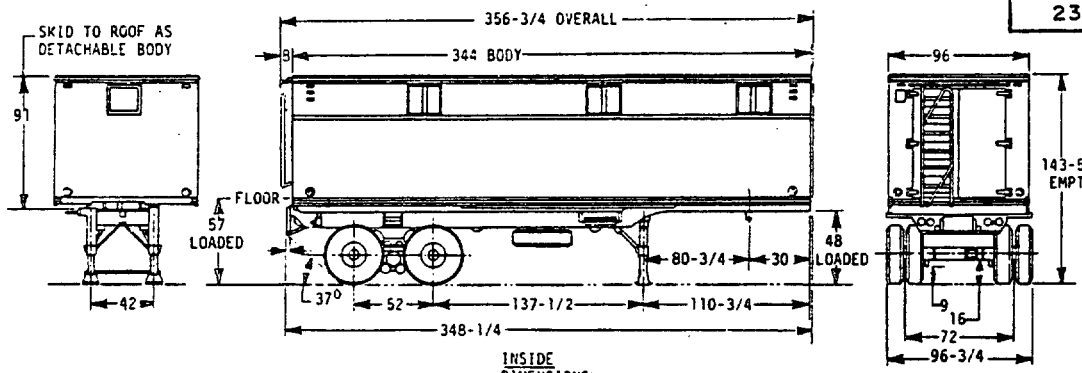

INSIDE DIMENSIONS:

WIDE - 88-1/2

HIGH - 77-1/2

LONG - 337

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK TRACTOR, 5 TON, 6x6, M52

(REFERENCE WEIGHTS FOR INFORMATION ONLY)

CURB WEIGHT: 15400 LBS.

WEIGHT DISTRIBUTION:
- KING PIN 4700 LBS.
- AXLE 10700 LBS.

PAYLOAD: LOADED 24000 LBS.

MAXIMUM WEIGHT: INCLUDING BODY AND PAYLOAD WITH PAYLOAD EVENLY DISTRIBUTED

KING PIN	14730 LBS.
AXLE	24670 LBS.
TOTAL	39400 LBS.

BODY AND CHASSIS ASSEMBLY: 8722138-1
THE BODY FRAME IS CONSTRUCTED OF 16 GAGE, 1-1/2 INCH SQUARE STEEL TUBING. FRONT, REAR, AND SIDE FRAMES ARE COVERED WITH RIVETED 22 GAGE CORROSION RESISTANT STEEL SHEETING ON THE OUTSIDE AND 1/4 INCH THICK, 3 PLY, DOUGLAS FIR PLYWOOD, EXTERIOR TYPE ON THE INSIDE. ROOF FRAME IS COVERED WITH RIVETED ARMCO ZINC GRIP PAINTED STEEL SHEETING. FLOOR IS CONSTRUCTED OF HARDWOOD BOARDS 1-5/16 INCHES THICK WITH STEEL WEAR STRIPS AT EACH BOARD JOINT. WALLS AND CEILING ARE INSULATED WITH FIBROUS GLASS FELT 1-1/2 INCHES THICK, CONFORMING TO MIL-I-22023.

CHASSIS ASSEMBLY, M126A2C: 8736683

KING PIN: 2 INCH DIA. MS53036-1

BODY:		
ASSEMBLY		10944661
DOOR ASSEMBLY, R.H.		10944665
DOOR ASSEMBLY, L.H.		10944666
BLOWER, EXHAUST		8722238
SKIN AND PANEL, PLYWOOD		8722155
SASH, STATIONARY		8722280
SASH, RETRACTABLE		8722279
REFLECTORS, RED, FOUR		MS35387-1
REFLECTORS, AMBER, FOUR		MS35387-2

ELECTRICAL SYSTEM:

BODY 7018527
POTENTIAL 12 VOLTS, 24 VOLTS AND 110 VOLTS

CHASSIS 10920550
POTENTIAL 12 VOLTS AND 24 VOLTS

FRAME ASSEMBLY: REINFORCED, DROP 8724534
SIDE RAIL - WIDE FLANGE BEAM 12 X 6-1/2 X 27 LB./FT.
SECTION MODULUS - 34.1 IN^3
CROSS MEMBERS - 13

AXLE: TUBULAR- TANDEM MS35866-A1
CAPACITY - 36000 LBS.

SPRINGS: FLAT LEAF 7979217
SIZE - 4 WIDE X 52 LONG, 12 LEAVES
RATE - 6150 LBS. PER INCH AVERAGE

WHEELS: DUAL MS53044-6
6-11/16 OFFSET SIZE 20 X 7-1/2
RING, WHEEL MS53045-3

TIRES: 11.00X 20 12 PLY
TREAD DESIGN - NDCC. TUBE MS35392-15

BRAKES: SERVICE 8739454
SIZE - 16-1/2 X 5-1/2
ACTUATION - AIR-OVER HYDRAULIC
EMERGENCY RELAY VALVE MS53004-1
AIR RESERVOIR 6169300

TIE DOWNS: (8) 7979180
2 EACH SIDE, 2 FRONT AND 2 REAR

CHOCK BLOCKS: (2) MS52127-3

LADDER: 8722222

FORDING DEPTH: 55 INCHES

MAXIMUM TOWING SPEED:
- LOADED 20 MPH
- HIGHWAY 50 MPH

LANDING GEAR: 11625162
ACTUATION-TWO SPEED MANUALLY OPERATED
CAPACITY -17500 LBS. PER LEG
35000 LBS. STATIC TOTAL
TRAVEL 18-7/8 IN

© NOTES:

ENTIRE STANDARD REVISED

1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.
4. SUBJECT OF NATO STANAG 2805-A (EDITION 3). DO NOT REVISE OR CHANGE.

MS PART NO.
MS500098-1

ENGINEERING DWG NO.
8736686

APPROVED 5 SEP 1968 REVISED © 13 JAN 86

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC - N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY-AT Other Cost	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		SEMITRAILER, VAN—SUPPLY, 12 TON, 4 WHEEL, M129A2C	MS500098(AT)
PROCUREMENT SPECIFICATION MIL-T-62034	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.