
FED. SUP CLASS
2330

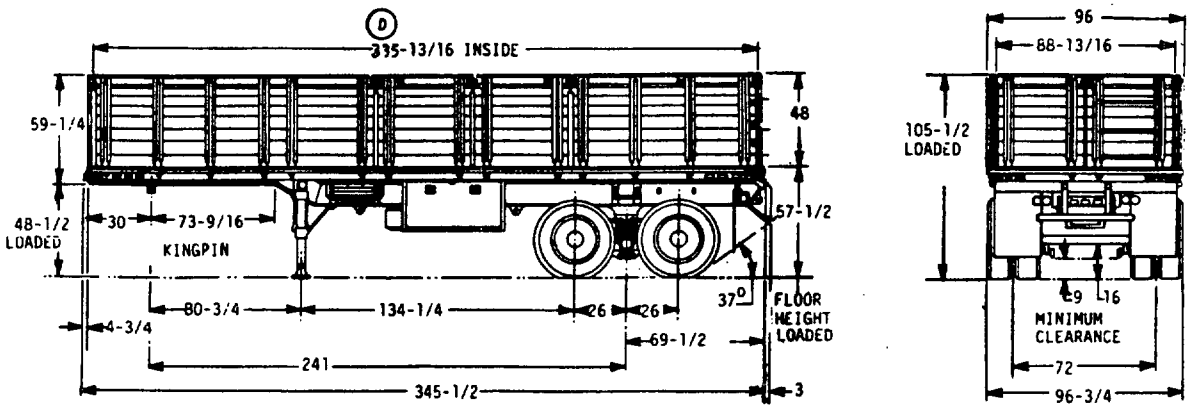

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK TRACTOR, 5 TON, 6 X 6
(REFERENCE WEIGHTS FOR INFORMATION ONLY)

CURB WEIGHT: 13840 LBS

WEIGHT DISTRIBUTION:

KING PIN:	3760 LBS
AXLE:	10080 LBS
LANDING GEAR:	5540 LBS
AXLE:	8300 LBS

MAX. WEIGHT: INCLUDING BODY AND PAYLOAD
WITH PAYLOAD EVENLY DISTRIBUTED

	LOADED
KING PIN	13910 LBS
AXLE	23930 LBS
TOTAL	37840 LBS

GENERAL:
THE BODY FRAME OF WELDED CONSTRUCTION, CONSISTS OF PRESSED STEEL SIDE RAILS, CROSS MEMBERS, AND SHORT CROSS MEMBERS WELDED TOGETHER WITH THE CHASSIS FRAME, FORMING ONE INTEGRAL UNIT. STAKE POCKETS ARE LOCATED ON THE OUTSIDE OF THE SIDE RAILS AND ON THE FRONT AND REAR CROSS-MEMBERS. THE PANELS, WHICH INCLOSE THE BODY ARE MADE UP OF 13 REMOVABLE SECTIONS, ONE ON FRONT, TWO ON THE REAR, AND FIVE ON EACH SIDE. THE HARDWOOD FLOOR FASTENS DIRECTLY TO THE BODY FRAME. A TOOL BOX IS PROVIDED BENEATH THE FRAME ON THE LEFT SIDE.

KING PIN: 2 INCH DIA. MS53036-1

LANDING GEAR: INST'N. 11625162
ACTUATION: TWO SPEED MANUALLY OPERATED
CAPACITY: 17500 LBS PER LEG
35000 LBS STATIC TOTAL
TRAVEL 18-7/8

MAXIMUM TOWING SPEEDS:

CROSS COUNTRY	20 MPH
HIGHWAY	50 MPH

ELECTRICAL SYSTEM:
BODY ASSY. INST'N. 7018931
POTENTIAL 12 VOLTS AND 24 VOLTS
CHASSIS ASSY. INST'N. 10920550
POTENTIAL 12 VOLTS AND 24 VOLTS

FRAME AND CHASSIS ASSY: 7019001-1
CHASSIS
FLOOR INST'N. 8739383
TOOL BOX INST'N. 10944759
RACKS INST'N. 8739376

AXLE: TUBULAR TANDEM MS35866-A4
CAPACITY 36000 LBS BOGIE: 10950340

SPRINGS: FLAT LEAF 7979217
SIZE- 4 WIDE X 52 LONG, 12 LEAVES
RATE - 6150 LBS PER INCH, AVERAGE

WHEELS: DUAL MS53044-6
6-11/16 OFFSET SIZE 20 X 7-1/2

TIRES: 11.00 X 20 12 PLY
TREAD DESIGN - NDCC TUBE MS35392-15

BRAKES: SERVICE INST'N. 8739454-1
SIZE- 16-1/2 X 5-1/2
ACTUATION - AIR / HYDRAULIC
EMERGENCY RELAY VALVE MS53004-1
AIR RESERVOIR 6169300

TIE DOWNS: EIGHT 7979180
2 EACH SIDE 2 FRONT AND 2 REAR

*FORDING DEPTH: 55 INCHES

MISCELLANEOUS EQUIPMENT:

CHOCK BLOCKS, TWO	MS52127-3
FLOAT PADS, TWO	7417585
TARPAULIN, ONE	7979195
FLAP, TWO	8739106
CHAIN, TEN	8739382
DOCK BUMPER, ONE	7018988-1
STEP, ONE	10944735

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.
*4. SUBJECT OF NATO STANAG 2805-(EDITION 3). DO NOT REVISE OR CHANGE.

(D) DENOTES CHANGE

MS PART NO.	ENGINEERING DWG NO
MS500099-1	8736684

P.A. ARMY-AT
Other Cust

TITLE
SEMITRAILER, STAKE,
12 TON, 4 WHEEL, M127A2C

MILITARY STANDARD
MS500099(AT)

PROCUREMENT SPECIFICATION
MIL-S-62034

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (LIMITED COORDINATION)

APPROVED 5 SEPTEMBER 1968 REVISED (C) 15 JAN 85 (D) 20 JAN 87

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check date to verify that this is the current version before use.