INCH-POUND


MS75028J
10 Feb 1992
SUPERSEDING
MS75028H
10 June 1986

MILITARY SPECIFICATION SHEET

SWITCH, TOGGLE, ONE POLE, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-83731

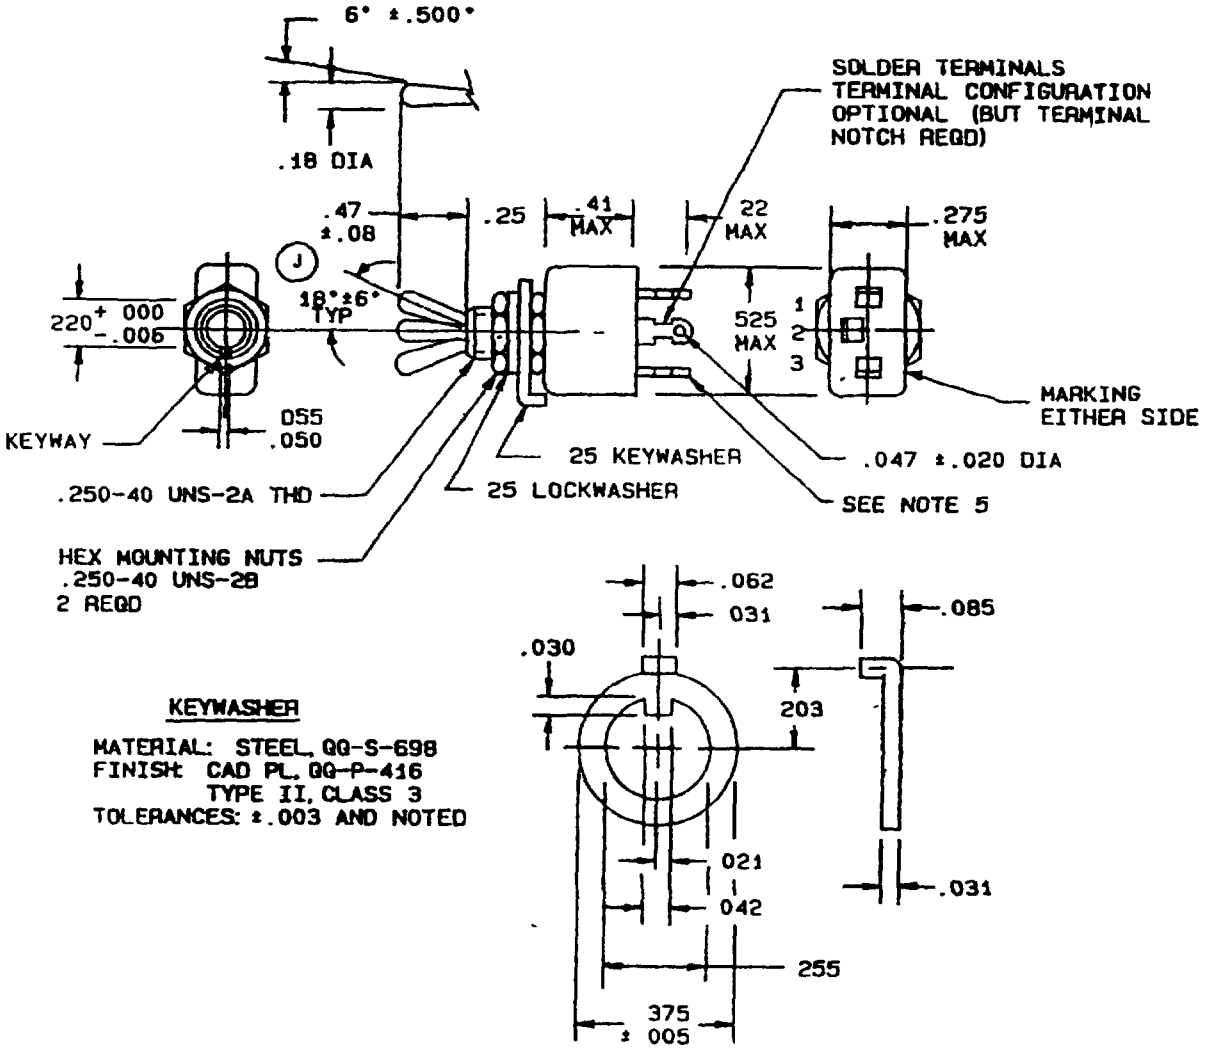


KEYWASHER

MATERIAL: STEEL, QQ-S-698
FINISH: CAD PL, QQ-P-416 TYPE II, CLASS 3
TOLERANCES: ±.003 AND NOTED

FIGURE 1 Dimensions and configurations

(J) denotes changes



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm |
|---|---|---|---|
| 003 | 08 | 085 | 2 0 |
| 005 | 13 | 18 | 4 6 |
| 006 | 15 | 203 | 5 16 |
| 020 | 51 | .220 | 5 59 |
| 021 | 53 | .25 | 6 35 |
| 030 | 76 | 255 | 6 48 |
| 031 | 79 | 275 | 6.99 |
| 042 | 1.07 | 375 | 9.53 |
| 047 | 1 19 | 41 | 10 4 |
| 050 | 1 27 | 47 | 11 9 |
| 055 | 1 40 | .525 | 13 4 |
| 062 | 1 57 | | |
| 08 | 2 0 | | |

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ±.020 on two place decimals and ± 005 on three place decimals.
4. For hardware detail specifications, see appendix, MIL-S-83731, and herein
5. Terminal 3 is not supplied on SPST switch (MS75028-22)

FIGURE 1 Dimensions and configurations - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration See figure 1

Switching characteristics See table I

TABLE I Switching characteristics.

| MS Part or Identifying Number (PIN) | Circuit with toggle lever in | | |
|---|---|---|---|
| | Down position (keying side) | Center position | Up position (opposite keying) |
| MS75028-21 | ON | OFF | ON |
| MS75028-22 | OFF | NONE | ON |
| MS75028-23 | ON | NONE | ON |
| MS75028-26 | MOM ON | NONE | ON |
| MS75028-27 | MOM ON | OFF | MOM ON |
| MS75028-31 | MOM ON | OFF | ON |

Switches, as specified herein, are designed so that the movement of the switch mechanism is opposite the toggle lever, with the exception if -22 and -23 in which the toggle movement is the same as the switch mechanism.

Weight .015 pound max

Electrical ratings

At 30.0 V dc

Resistive load: 5.0 amperes

Inductive load: 2.0 amperes

Lamp load 1.0 ampere

At 115.0 V ac, 400 Hz.

Resistive load: 5.0 amperes.

Inductive load 2.0 amperes

Lamp load· 1.0 ampere

Strength of pivot and lever stop 12 pounds minimum for lever and 7.2 pounds minimum for pivot

Sand and dust· Toggle boot shall be used in meeting sand and dust test

Marking Marking, including terminal marking, may be on either side of the switch



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.

## CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activity
Army - AV
Navy - AS
Air Force - 99
DLA - ES

Preparing activity.
Air Force - 85

Agent
DLA - ES

(Project 5930-1495-01)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.