
THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THE ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-5501

Form approved
OMB No 0704-0188

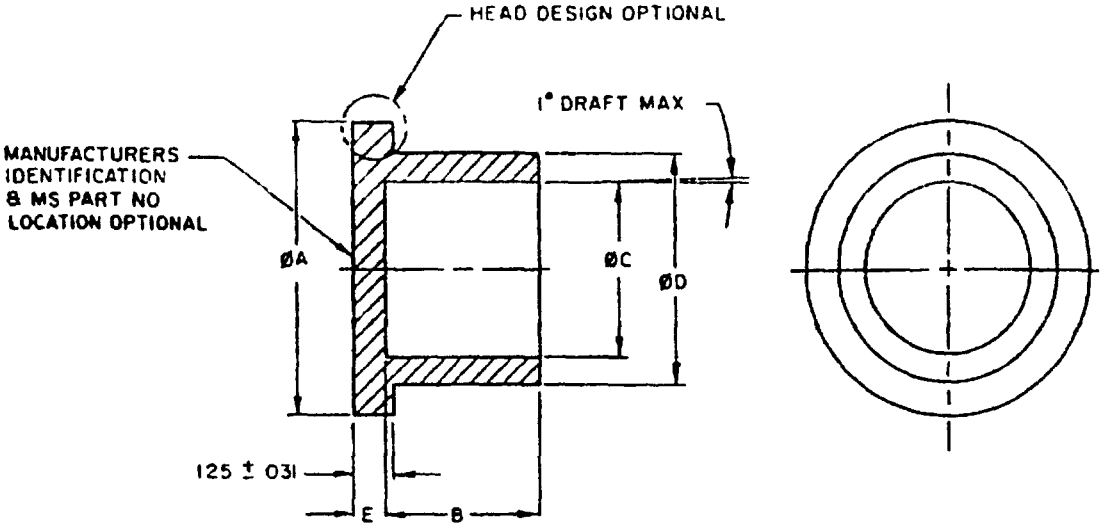

	DASH NO 1/	ØA ± 031	B ± 031	ØC ± 010	ØD ± 010	E ± 010	SUPERSEDES
	-8Y	.670	.625	.413	.483	.040	MS25177-8
	-8R	.740	.500	.480	.540	.040	MS25178-8
	-10Y	.750	.625	.530	.595	.040	MS25177-10
	-10R	.840	.500	.605	.665	.040	MS25178-10
	-12Y	.840	.625	.655	.715	.040	MS25177-12
	-12R	.970	.500	.720	.775	.040	MS25178-12
	-14Y	1.031	.625	.785	.845	.045	MS25177-14
	-14R	1.125	.500	.850	.905	.045	MS25178-14
E	-16Y	1.125	.625	.893	.963	.045	MS25177-16
	-16R	1.220	.500	.973	1.035	.045	MS25178-16
	-18Y	1.250	.625	1.038	1.088	.045	MS25177-18
	-18R	1.328	.562	1.093	1.155	.045	MS25178-18
	-20Y	1.406	.625	1.150	1.215	.050	MS25177-20
	-20R	1.485	.562	1.231	1.301	.050	MS25178-20
	-22Y	1.500	.625	1.270	1.340	.050	MS25177-22
	-22R	1.578	.562	1.340	1.410	.050	MS25178-22
E	-24Y	1.640	.625	1.390	1.466	.050	MS25177-24
E	-24R	1.700	.562	1.461	1.531	.050	MS25178-24
E	-25Y	1.810	.625	1.540	1.590	.050	----------
	-28Y	1.875	.625	1.648	1.718	.055	MS25177-28
	-28R	1.950	.562	1.715	1.790	.055	MS25178-28
	-32Y	2.125	.625	1.890	1.970	.055	MS25177-32
	-32R	2.220	.562	1.965	2.045	.055	MS25178-32
	-36Y	2.340	.625	2.140	2.210	.055	MS25177-36
	-36R	2.435	.500	2.215	2.290	.055	MS25178-36
	-40Y	2.500	.625	2.390	2.450	.060	MS25177-40
	-40R	2.600	.500	2.440	2.530	.060	MS25178-40
	-44Y	2.875	.625	2.630	2.700	.060	MS25177-44
	-44R	2.960	.500	2.720	2.812	.060	MS25178-44
	-48Y	3.125	.625	2.880	2.950	.060	MS25177-48
E	-48R	3.225	.500	2.960	3.050	.060	MS25178-48

E 1/ THE Y OR R SHALL BE FOLLOWED BY B FOR CONDUCTIVE CAPS.

REQUIREMENTS

1 MATERIAL TYPE A POLYETHYLENE, L-P-390, TYPE I, CLASS L, GRADE OPTIONAL
B ELECTROSTATIC FREE MATERIAL CONFORMING TO MIL-B-81705, TYPE II
E C CONDUCTIVE MATERIAL CONFORMING TO MIL-B-81705, TYPE I

2 COLOR CODING Y = YELLOW, R = RED, COLORS IN ACCORDANCE WITH MIL-STD-104
YB, RB - BLACK COLOR FOR CONDUCTIVE CAPS ONLY

3 THE PART NUMBER SHALL BE MARKED ON EACH CAP WITH RAISED CHARACTERS

4 THE MANUFACTURERS IDENTIFICATION SHALL CONSIST OF MANUFACTURERS' SYMBOL, TRADEMARK OR SOURCE CODE

NOTES

1 DIMENSIONS ARE IN INCHES

E 2 EXAMPLE OF PART NUMBER MS90376 - 18Y F
BASIC PART NUMBER — DASH NUMBER — BLANK FOR TYPE A, F FOR TYPE B, B (BLACK) FOR TYPE C

3 FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

E DENOTES CHANGE Changes reflect corrections and those items not denoted as changes in Revision D

PREPARING ACTIVITY NAVY-AS CUSTODIANS ARMY-ER NAVY-AS AIR FORCE-85 DLA- REVIEW ARMY-AR, SL, WC, DSA-IS USER ARMY-AV PROJECT NUMBER 5340-2149	MILITARY SPECIFICATION SHEET TITLE CAP, DUST, PLASTIC, ELECTRIC CONNECTOR	SPECIFICATION SHEET NUMBER MS90376 25 May 93 REV E SUPERSEDING MS90376 D 30 JUN 92 AMSC- N/A FSC 5340

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.

DD FORM 672 MAY 1988