
FED. SUP CLASS
5900

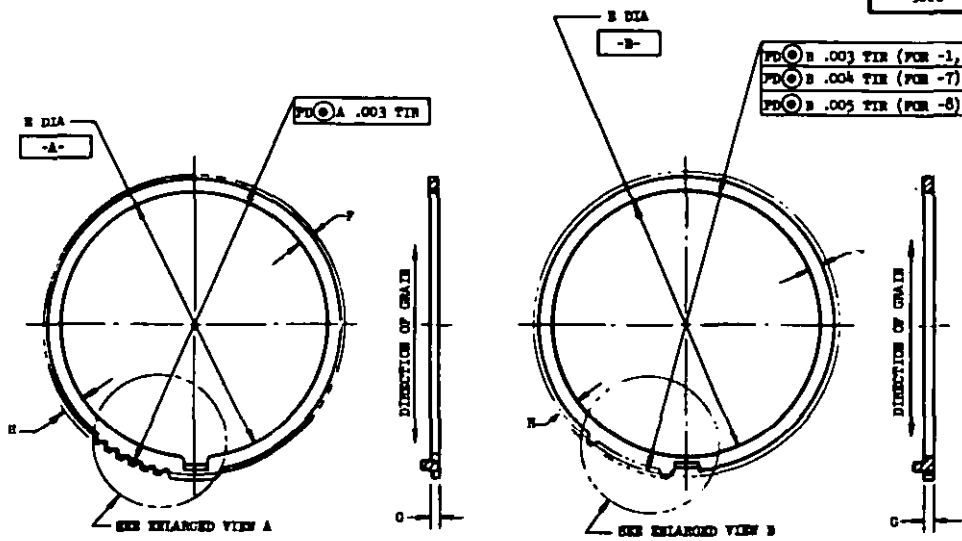

RING, ZEROING -1
RING, ZEROING -4
RING, ZEROING -5

RING, ZEROING -1
RING, ZEROING -2
RING, ZEROING -6
RING, ZEROING -7
RING, ZEROING -8

TABLE I - RING DIMENSIONS

DASH NO.	SIZE SYMCRO	R DIA	P	Q	S	J	K	L	M
-1	05	0.3756	.0620	.0150	.1145	--	10°	40°	.020
-2	08	0.5006	.1240	.0150	.1875	--	8°	40°	.020
-3	11	$1.0002^{+.0015}_{-.0000}$	.032	.019 ±.003	.077	12°	13°	30°	.010
-4	15	$1.3122^{+.0015}_{-.0000}$	.069	.032	.108	10°	10°	30°	.020
-5	18	$1.5622^{+.0015}_{-.0000}$	.095	.032	.140	10°	10°	31°	.040
-6	23	$2.000^{+.004}_{-.000}$	.185	.041	.174	--	7°	29°11'	.014
-7	31	$2.753^{+.004}_{-.000}$	.172	.041	.216	--	6°	28°30'	.012
-8	37	$3.377^{+.002}_{-.001}$	.124	.041	.172	--	5°	30°30'	.014

NOTES:

1. MATERIAL: STEEL, CORROSION RESISTING, QQ-S-766, CLASS 410, CONDITION A, FINISH 2B.
2. FINISH: PASIVATE IN ACCORDANCE WITH QQ-P-35, TYPE II OR TYPE III.
3. HEAT TREATMENT: HEAT TREAT IN ACCORDANCE WITH MIL-H-6875, 38 to 43 ROCKWELL HARDNESS.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.0005 FOR -1 AND -2, ±.005 FOR -3, -4, -5, -6, -7, AND -8, ANGLES ±30'. INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH MIL-STD-8.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

USER INTEREST: ARMY - AV, MI, CR, MC
NAVY - AS, CG, MC
AF - 17

REVIEWER INTEREST: ARMY - MU, EL, MI
NAVY - AS, SH
AF - 11, 85

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 6 JUNE 1967 REVISED

P.A. NAVY- AS Other Cust ARMY - MU NAVY - AS AF - 11	TITLE RING, ZEROING	MILITARY STANDARD MS90398
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: NORD 813859, 813860, 813861, 854592, 854593, 854594	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 15120


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.


USER INTEREST:
ARMY - AV
NAVY - AS, CG, MC
AF - 17

REVIEWER INTEREST:
ARMY - MU, PA, MI
NAVY - AS, OH
AF - 11, 85

FED. SUP CLASS
5990

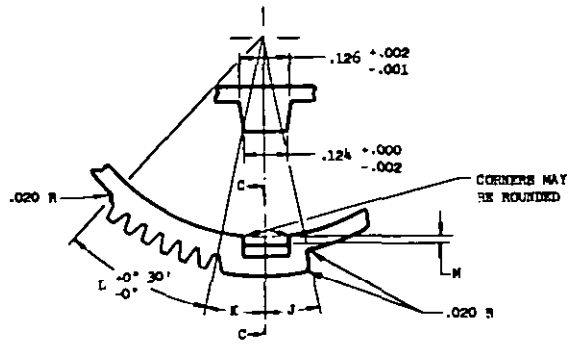


ENLARGED VIEW A




SECTION C-C

TABLE II - GEAR DATA (FOR TOOLING PURPOSES)

DATA	DASH NO.			
	-1	-2	-3	-4
TOOTH FORM	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE
PRESSURE ANGLE	20°	20°	20°	20°
TEETH PER COMPLETE GEAR (REF)	36	54	72	96
TEETH PER COMPLETE SECTOR	4	6	6	8
DIAMETRAL PITCH	64	64	64	64
ROOT DIA (MAX)	0.523	0.705	1.086	1.461
BACKLASH	.002 +.002 -.000	.002 +.002 -.000	.002 +.002 -.000	.002 +.002 -.000
PITCH DIA (DATUM)	.5625	.8437	1.125	1.500

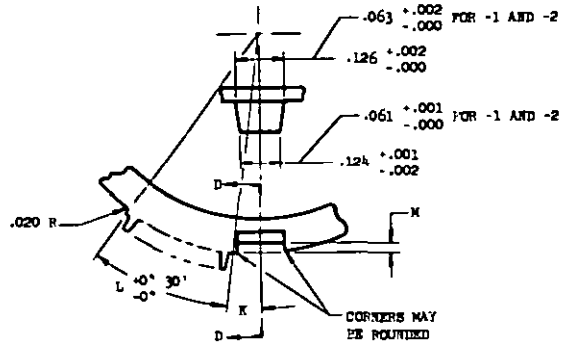

ENLARGED VIEW B

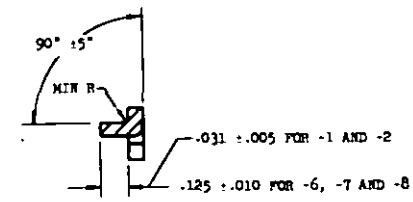

SECTION D-D

TABLE III - GEAR DATA (FOR TOOLING PURPOSES)

DATA	DASH NO.			
	-5	-6	-7	-8
TOOTH FORM	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE
PRESSURE ANGLE	20°	20°	20°	20°
TEETH PER COMPLETE GEAR (REF)	116	148	202	236
TEETH PER COMPLETE SECTOR	10	12	16	20
DIAMETRAL PITCH	64	64	64	64
ROOT DIA (MAX)	1.774	2.274	3.111	3.643
BACKLASH	.002 +.002 -.000	.002 +.002 -.000	.002 +.002 -.000	.002 +.002 -.000
PITCH DIA (DATUM)	1.813	2.3125	3.156	3.6875

APPROVED 6 JUNE 1967 REVISED

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - MU NAVY - AS AF - 11	TITLE RING, ZEROING	MILITARY STANDARD MS90398
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: FSCM 813859, 813860, 813861, 854592, 854593, 854594	SHEET 2

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.