
FED SUP CLASS
5310

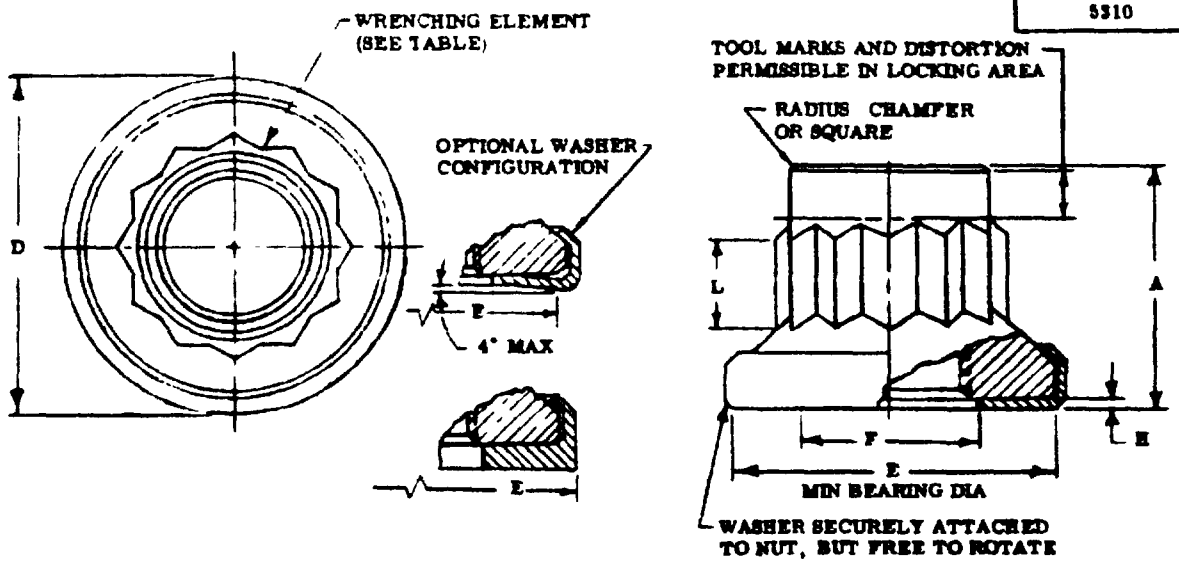

DASH NO.	THREADS (MIL-S-8879)	A	WRENCHING ELEMENT *	D		E	F	H		L	ULTIMATE STRENGTH LB MIN	MAX WEIGHT LB/100
		MAX		MAX	MIN	MIN	MAX	MAX	MIN	MIN		
-3	190-32 UNJF-3B	.305	.2500	445	415	.385	.220			.082	2,470	.33
-4	2500-28 UNJF-3B	.350	3125	530	.476	416	280	.018	.014	.096	6,200	.53
-5	3125-24 UNJF-3B	.385	3750	640	.574	.514	343			.108	9,820	.91
-6	3750-24 UNJF-3B	.520	4375	680	630	.610	.406	.067	.057	147	15,200	1.58

*WRENCHING ELEMENT SHALL BE IN ACCORDANCE WITH AS870

NOTES 1 MATERIALS NUT - STEEL UNS G40370 (AISI 4037) PER ASTM A322, A331, A519, A547
UNS G86300 (AISI 8630) PER AMS 6280 6281, 6355 6530
UNS G87400 (AISI 8740) PER AMS 6322, 6323, 6325 6327, 6358
WASHER - STEEL UNS G10350 (AISI C1035) PER QQ-S-635, QQ-S-700
UNS G10420 (AISI C1042) PER QQ-S-635
UNS G10500 (AISI 1050) PER AMS 5085
UNS G11370 (AISI 1137) PER AMS 5024
UNS G11374 PER AMS 5020
UNS G41300 (AISI 4130) PER AMS 6348

2 FINISH (a) NUT CADMIUM PLATE, QQ-P-416, (TYPE AND CLASS OPTIONAL) PLUS MOLYBDENUM DISULFIDE DRY FILM LUBRICANT, AND SHALL MEET TYPE II SALT SPRAY REQUIREMENTS
(b) WASHER CADMIUM PLATE QQ-P-416 TYPE II CLASS 2

(C) 3 SURFACE TEXTURE SHALL NOT EXCEED 125 BEFORE PLATING IN ACCORDANCE WITH ANSI B46.1
(C) 4 HARDNESS 48 HRC MAXIMUM
5 REMOVE ALL BURRS AND BREAK ALL SHARP EDGES
6 DIMENSIONS IN INCHES DIMENSIONS APPLY AFTER PLATING AND BEFORE APPLICATION OF LUBRICANT

DESIGN AND USAGE NUT SHALL BE USED IN ACCORDANCE WITH MS33588 SIZES -3 THRU -5 DESIGNED PRIMARILY FOR USE ON IMPORTANT ELECTRICAL TERMINALS AND SIZE -6 DESIGNED FOR ENGINE ACCESSORY MOUNTING INVOLVING KEYHOLE TYPE MOUNTING FLANGES

EXAMPLE OF PART NUMBER MS90415-6 * 3750-24 NUT SELF LOCKING STEEL 160KSI 450°F 12 POINT CAPTIVE WASHER

(C) BIDS SHALL BE SOLICITED ONLY FROM THE MANUFACTURERS OR DISTRIBUTORS LISTED ON QPL-25027

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL BE THE DATE OF THE ISSUE ADOPTED

(C) DENOTES CHANGES

APPROVED 1 FEB 66 REVISED (A) 2 April 1969 (B) 29 Sept 1980 (C) 30 NOV 88

P.A. NAVY - AS Other Cust	TITLE NUT, SELF-LOCKING, STEEL, 160KSI, 450 F 12 POINT, CAPTIVE WASHER	MILITARY STANDARD MS90415(AS)
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AMSC N/A
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.