FED SUP CLASS
5315

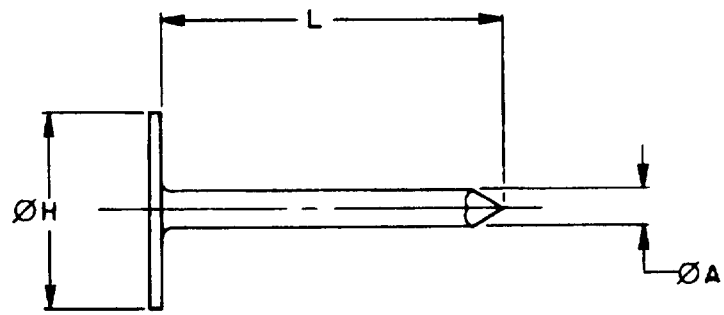


TABLE I. DASH NUMBERS AND DIMENSIONS

ROOFING NAIL				
DASH NO	ØA ± 004	ØH (SEE REQT 4)	L	NO/LB (APPROX)
1	120	438	3/4 ± 1/32	338
2	106	375	3/4 ± 1/32	449
3	120	438	7/8 ± 1/32	294
4	106	.375	7/8 ± 1/32	388
5	.120	438	1 ± 1/32	261
6	.106	375	1 ± 1/32	341
7	135	469	1 1/4 ± 1/16	164
8	135	469	1 1/2 ± 1/16	139
9	135	469	1 3/4 ± 1/16	118
10	.106	375	1 1/4 ± 1/16	295
11	106	375	1 1/2 ± 1/16	249
12	106	.375	1 3/4 ± 1/16	216
13	120	438	1 1/4 ± 1/16	220
14	120	438	1 1/2 ± 1/16	187
15	120	438	1 3/4 ± 1/16	162
16	135	469	3/4 ± 1/32	274
17	135	469	7/8 ± 1/32	241
18	135	469	1 ± 1/32	215
19	148	500	3/4 ± 1/32	222
20	148	500	7/8 ± 1/32	195
21	148	500	1 ± 1/32	174
22	148	500	1 1/4 ± 1/16	144
23	.148	500	1 1/2 ± 1/16	122
24	148	500	1 3/4 ± 1/16	106
25	162	500	3/4 ± 1/32	197
26	.162	500	7/8 ± 1/32	172
27	.162	500	1 ± 1/32	153
28	162	500	1 1/4 ± 1/16	125
29	.162	500	1 1/2 ± 1/16	106
30	162	500	1 3/4 ± 1/16	92

REQUIREMENTS

1 MATERIAL NAIL TYPE II, STYLE 20 SHALL BE MANUFACTURED FROM STEEL WIRE IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION

2 CHARACTERISTICS NAIL SHALL HAVE A FLAT HEAD, DIAMOND POINT, ROUND SHANK, SMOOTH OR BARBED

3 PROTECTIVE COATING AND SURFACE TREATMENT ROOFING NAIL SHALL BE ZINC COATED IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS FE/ZN13, LUSTER BRIGHT

4 HEAD DIAMETERS TOLERANCES ON HEAD DIAMETERS SHALL BE PLUS 0, MINUS 10 PERCENT OF THE NOMINAL HEAD DIAMETER (MEAN OF TWO READINGS 90 DEGREES APART)

Ⓐ ENTIRE STANDARD REVISED

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-AR		NAIL, COMPOSITION ROOFING	MS90714
Other Cust NAVY-YD AIR FORCE-99			
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES		PAGE 1 OF 2

APPROVED 18 DEC 62 REVISED Ⓐ 25 JAN 88

REVIEWER ACTIVITIES (DPSC MONITORS COORDINATING ACTIVITIES): ARMY-CE,ME; NAVY-SA; AIR FORCE-82; GSA-FSS

USER ACTIVITIES: ARMY-AV,MI; NAVY-AS,MC,SH

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

(This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.)

AMSC N/A

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS ARE OBSOLETE 5315-0427

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5315

5 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS90714-7A

- SHANK CODE INDENTIFIER
  - A-SMOOTHED
  - B-BARBED
- DASH NUMBER
- BASIC MS NUMBER

MS90714-7A INDICATES- NAIL, COMPOSITION ROOFING, LENGTH 1 1/4 INCHES, 135 DIAMETER, 469 HEAD, SMOOTH SHANK, DIAMETER ZINC COATED

NOTES:

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

REVIEWER ACTIVITIES (CIVIL AGENCIES COORDINATING ACTIVITIES)
ARMY-CE,ME
NAVY-SA
AIR FORCE-82
GSA-FSS

USER ACTIVITIES
ARMY-AV,MI
NAVY-AS,MC,SH

APPROVED 18 DEC 62 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. *Selection for all new engineering and design applications and for repetitive use shall be made from the document when applicable

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY – AR Other Cust NAVY – YD AIR FORCE-99		NAIL,COMPOSITION ROOFING	MS90714
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5315-0427

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.