FED SUP CLASS
5315

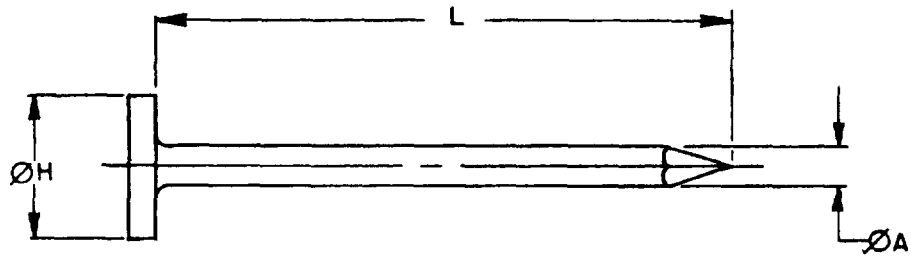


TABLE I DASH NUMBERS AND DIMENSIONS

SPIKE					
DASH NO	COMM SIZE	ØA ±.004	ØH	L	NO/LB (APPROX)
1	60d	.283	.562	6 ± 3/32	9
2	—	.312	625	7 ± 1/8	6
3	—	.375	750	8 ± 1/8	4
4	—	.375	.750	10 ± 1/8	3
5	—	.875	1 750	20 ± 1/8	
6	40d	.262	531	5 ± 3/32	13
7	50d	283	562	5 1/2 ± 3/32	10
8	—	375	750	9 ± 1/8	3

REQUIREMENTS:

1. MATERIAL: SPIKE, TYPE V, STYLE 3 SHALL BE MANUFACTURED FROM STEEL WIRE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

2 CHARACTERISTICS SPIKE SHALL HAVE FLAT HEAD, DIAMOND POINT, BRIGHT FINISH (SEE NOTE 2) OR ZINC COATED, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

3 PROTECTIVE COATING AND SURFACE TREATMENT SPIKE SHALL BE UNCOATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION OR ZINC COATED IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS FE/ZN13, LUSTRE BRIGHT AND AS CODED IN REQUIREMENT 5

HEAD DIAMETER. THE DIFFERENCE IN DIAMETER ACROSS THE LONG AXIS OF A SPIKE SHALL NOT EXCEED THAT ACROSS THE SHORT AXIS BY MORE THAN 10 PERCENT A FILLET SHALL BE PROVIDED UNDER THE HEAD, AN ANGLE OR RADIUS WILL BE ACCEPTABLE. HEADS SHALL BE WELL CENTERED

5 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I, AND THE FINISH CODE LETTER "A" FOR ZINC COAT WHEN SPECIFIED.

EXAMPLE: MS90718-1A

- FINISH CODE
- DASH NUMBER
- BASIC MS NUMBER

MS90718-1A INDICATES- SPIKE, 60d COMMERICAL SIZE, .283 DIAMETER, .562 HEAD DIAMETER, 6 INCHES LONG, ZINC COATED

REVIEWER ACTIVITIES (CIVIL AGENCIES COORDINATING ACTIVITIES) USER ACTIVITIES
ARMY-CE,ME GSA-FSS ARMY-AV,MI
NAVY-SA NAVY-AS,MC,SH
AIR FORCE-82

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

APPROVED 18 DEC 62 REVISED (A) 25 JAN 68

(A) ENTIRE STANDARD REVISED

PA ARMY-AR	INTERNATIONAL INTEREST	TITLE SPIKE,COMMON WIRE	MILITARY STANDARD MS90718
Other Cust NAVY-YD AIR FORCE-99			
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES		PAGE 1 OF 2

DD FORM 1 MAY 62 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5315-0428

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5315

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 BRIGHT FINISH IS A TERM APPLIED TO SPIKES WITH NATURAL BARE FINISH RESULTING FROM CLEANING OF SPIKES WHICH HAVE NOT UNDERGONE TREATMENTS AFFECTING FINISH, SUCH AS HARDENING, BLUING, COATING, PLATING, ETCHING OR PAINTING

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

REVIEWER ACTIVITIES: (OR, AGENCIES COORDINATING ACTIVITIES)
ARMY-CE,ME
NAVY-SA
AIR FORCE-82
GSA-FSS

USER ACTIVITIES
ARMY-AV, MI
NAVY-AS,MC,SH

APPROVED 18 DEC 62 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY – AR		SPIKE,COMMON WIRE	MS90718
Other Cust NAVY – YD AIR FORCE-99			
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES		PAGE 2 OF 2

DD FORM 672-1

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.