K-B-1069A
November 3, 1972
SUPERSEDING
Int. Fed. Spec. K-B-001069(GSA-FSS)
March 25, 1964

FEDERAL SPECIFICATION

BASKET, FRAME MOUNTED

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers utility handcart, having a metal folding frame mounted on four casters with a removable 4 bushel capacity cotton cloth (washable) bag.

1.2 Classification.

1.2.1 Type and class. The utility handcart and bag covered by this specification shall be of one type and class.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

CCC-C-421 - Cloth, Denim, Cotton, Shrunk and Unshrunk.
PPP-B-591 - Boxes, Shipping, Fiberboard, Wood-Cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Boxes Fiberboard.
PPP-T-97 - Tape; Pressure-Sensitive Adhesive, Filament reinforced.

Federal Standards:

Fed. Std. No. 102 - Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 191 - Textile Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116 - Preservation, Method of.
MIL-L-10547 - Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedures and Table for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, a preproduction sample of the utility handcart with bag shall be submitted to the contracting officer for approval.

3.2 Figure. The figure incorporated in this specification is furnished for guidance to the contractor and is not intended to preclude the purchase of utility handcarts with bags otherwise in accordance with the requirements of this specification.

3.3 Materials. Material shall be as hereinafter specified. Materials not specifically defined shall be as regularly used by the manufacturer.

3.4 Frame, utility handcart. The frame shall be of tubular steel construction and of sufficient strength and rigidity to support the minimum load requirements of the completely assembled utility handcart and bag (see 3.5). When operating with full load capacity, the handcart should move smoothly and easily, steer freely in any direction, and travel quietly over thresholds, rough floors, gravel walks and other rough or uneven surfaces. The frame shall be of the folding type so that it may be stored in a small area when not in use. The frame in operating position shall be approximately 16 x 22 x 36 inches high and constructed to accommodate a bag of four bushel capacity as specified in 3.5.

3.4.1 Finish. The frame shall be either chrome plated, have a baked enamel finish, or coated with a primer followed by a high grade enamel or lacquer.

3.4.2 Accessories and components. There shall be a restraining chain (figure 1) made of noncorrosive metal or steel nickel plated or otherwise treated for corrosion resistance. The chain shall be securely attached to the metal frame and shall be completely flexible for easy folding. The frame shall have pressed-in riveted axles. The handcart shall have bolted bag hooks or steel knobs, or comparable attachment devices, positioned to receive the grommets placed on the bag as specified in 3.5.2. There shall be not rough or sharp places on the metal frame, including hardware, which may cause injury to users.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:08Z
Check the source to verify that this is the current version before use.

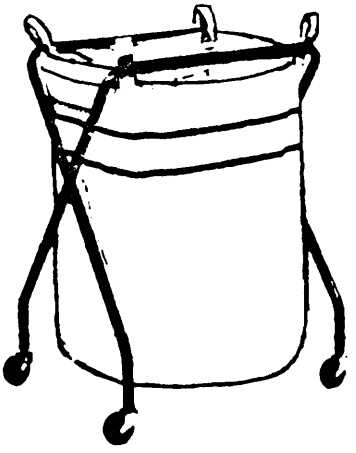


FIGURE I.

3.4.3 Casters. The handcart shall have four full swivel non-marking casters. The wheels shall be at least three inches in diameter and shall be provided with either anti-friction or self-lubricating sleeve type bearings.

3.5 Bag for handcart. The bag shall have a four bushel capacity and shall be approximately 18-1/4 inches square at the top opening and bottom. All seams shall be turned under and double or triple stitched. All stitching ends and thread breaks shall be backstitched a minimum of 1 inch. Thread ends shall be trimmed throughout. The bag shall be hemmed a minimum of 1-3/8 inches at the top. The cloth shall be blue denim, unless otherwise specified (see 6.2). The bag shall be constructed to carry a distributed load up to 375 pounds when in operating position on handcart frame.

3.5.1 The cloth shall weigh not less than 9.75 ozs. per square yard, shall be preshrunk and shall not have a residual shinkage of more than 2.0 percent or stretch more than 0.75 percent in either direction of the warp or filling when tested as specified in 4.7. Unless otherwise specified (see 6.1), the dyed cloth shall show fair color fastness to light (after 40 hours exposing), water, laundering and wet crocking when tested as specified in 4.7. The use of sulfur dyes or dyes containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited.

3.5.2 Accessories and components. There shall be a grommet assembly securely attached to the bag through the hem and web handle at each tope corner of the bag, positioned for attachment to the hooks or knobs on the handcart frame. The grommets shall be No. 5, approximately 5/8 inch I.D. and 1-1/4 inch O.D., rolled rim spur washer, brass with nickel finish, or comparable type grommet assembly allowing removal of the bag and reattachment to the handcart. There shall be approximately 9/64 inch in diameter and shall have a minimum breaking strength of 110 pounds. There shall be a webbing handle at each corner of the bag with the webbing not less than 1-1/2 in. width x 3-1/2 in. length. The handles shall be of sufficient strength and securely attached to the bag to lift and remove a loaded bag from a handcart frame.

3.6 Workmanship. The finished utility handcart and bag shall conform to the quality and grade of product established by this specification. The occurence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to the prescribed requirements.

4.2 Preproduction sample inspection. When a preproduction sample is required, inspection shall be made of the completed end item for conformance with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:08Z
Check the source to verify that this is the current version before use.

4.3 Inspection for acceptance. Inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.4 Intermediate inspection.

4.4.1 Examination of the intermediate product (metal frame). The defects found during intermediate examination shall be classified in accordance with table I. The inspection level shall be I and the acceptable quality level (AQL's) shall be 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units. The sample unit for this examination shall be one complete metal frame, prior to assembly of the cloth bag. The lot size shall be all the frames submitted for inspection.

TABLE I. Examination of metal frames

Examine	Defects	Classification	
		Major	Minor
Finish	Not finished.	X	
	Finish not adherent, or flaking.		X
	Foreign matter imbedded in finish.		X
	Scratched, scuffed, or abraded, exposing bare metal.		X
Design, Construction and workmanship	Not in accordance with the specified requirements.	X	
	Not connected or joined securely.	X	
	Incorrect size.	X	
	Rough or sharp places which may cause injury to users.	X	
Components	Component missing, or is fractured, split, punctured, dented, bowed, malformed, or impaired.	X	
	Restraining chain not securely attached or not properly supporting unfolded frame.	X	
Casters	Not specified type.	X	
	Damaged.	X	
	Caster is inoperative, e.g. wheel will not turn or will not swivel when required.		X
	Caster will operate but movable part binds.		X
	Not properly mounted.		X

4.5 Examination of the end item. The defects found during the examination shall be in accordance with table II. The inspection level shall be II and the AQL's shall be 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units. The sample unit for this examination shall be one completely fabricated cotton utility handcart bag. The lot size shall be the number of bags submitted for delivery at one time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of waste-truck bags

Examine	Defects	Classification	
		Major	Minor
Cloth	Holes, cuts or tears, any smash, weak place, broken or missing yarns, multiple float or open place clearly visible.	X	
Seams and Stitching	Open seam.		X
	Any raw edges.		X
	Loose stitch tension resulting in a loosely exposed top or bobbin thread; tight, resulting in puckering or excessive tightness of cloth on seams.		X
	Thread breaks backstitched less than 1 inch.		X
	NOTE: Thread breaks not backstitched shall be classified as open seams.		
	Stitching ends backstitched less than 1 inch (except where ends are held down by other stitching, or turned under in a hem).		X
Details of construction	Construction, dimensions or capacity not as specified.	X	
Grommets	Not securely clinched.		X
	Clinched excessively tight, cutting cloth.	X	
	Number of grommets less than specified.	X	
	Incorrect size causing insecure attachment to handcart.	X	
Drawstring	Missing.	X	
	Cuts, abrasions or weak areas.		X
Webbing handles	Not securely attached at top of bag.	X	
	Number of handles less than specified.	X	
	Not positioned as specified.		X
	Less than 1-1/2 inches wide.		X
	Less than 3-1/2 inches long.		X
Cleanness	Noticeable grease or oil stains.		X
	Thread ends not trimmed throughout.		X

4.6 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table III. For examination of contents the sample units shall be one shipping container fully prepared for delivery selected just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

TABLE III. Classification of preparation for delivery defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping inadequate stapling. Bulging or distortion of container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

4.7 Tests. The methods specified in Fed. Std. No. 191 wherever applicable, and as listed in table IV, shall be followed for testing of the cloth and bag. All components of the handcart frame and bag shall conform to requirements specified in section 3 of this specification. Any test failure shall be cause for rejection of the entire lot submitted for inspection or delivery, as applicable.

TABLE IV. Test methods (cloth)

Characteristic	Requirement reference	Test method No.
Weight	3.5.1	5041
Colorfastness to:		
light	3.5.1	5660
water	3.5.1	5630
laundering	3.5.1	5610
crocking	3.5.1	5651
Shrinkage or stretch:		
warp	3.5.1	5550
filling	3.5.1	5550

5. PREPARATION FOR DELIVERY

(For civil agency procurement the definitions and applications of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.)

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. The handcart frame and the cloth bag shall be folded or collapsed to a minimum safe dimension and packaged in accordance with MIL-P-116, method IC-2.

5.1.2 Level B. The handcart frame and the cloth bag shall be folded to a minimum safe dimension and packaged in a close-fitting box conforming to PPP-B-636, type I, class 1, style RSC. The box shall be closed in accordance with the appendix to the box specification.

5.1.3 Level C. Each complete handcart shall be packaged in accordance with the supplier's commercial practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. The handcarts shall be packed in one of the following containers at the option of the contractor:

Federal Specifications	Type and Class
PPP-B-591	Overseas type
PPP-B-601	Overseas type
PPP-B-621	Class 2
PPP-B-636	Class 2, V3c

The gross weight of the wood boxes shall not exceed 125 pounds; of the fiberboard boxes, the weight limitations of the applicable box specification. Each wood box shall be lined with a case liner conforming to and sealed in accordance with MIL-L-10547. The fiberboard boxes shall be waterproof sealed with tape in accordance with the appendix to the box specification. Strapping shall be in accordance with the appendix to the applicable box specification.

5.2.2 Level B. Unless otherwise specified (see 6.2), the handcarts packaged as specified in 5.1 shall not require additional packing prior to shipment. When specified (see 6.2), four unit packages of handcarts shall be banded together with filament tape conforming to PPP-T-97, type III. The tape shall be applied in accordance with the appendix to the tape specification.

5.2.3 Level C. The handcarts shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Mounted basket frames covered by this specification are intended for janitorial use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) When preproduction sample is required (see 3.1).
(c) Type of cloth, if other than blue denim required (see 3.5).
(d) Colorfastness requirements if other than specified (see 3.5.1).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When four unit packages and banding as specified in 5.2.2 is required (see 5.2.2).

MILITARY CUSTODIANS:

Army - GL
Navy - YD
Air Force - 84

Review activities:

Army - GL

Preparing activity:

GSA-FSS

☆ U. S. GOVERNMENT PRINTING OFFICE : 1972 O - 514-174 (221)

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.