K-P-146c
May 6, 1963
SUPERSEDING
Fed. Spec. K-P-146b
August 6, 1959
(See 6.5)

FEDERAL SPECIFICATION

PAULINS: COTTON DUCK; FIRE, WATER, WEATHER AND MILDEW-RESISTANT

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for noncoated paulins (see 6.1).

1.2 Classification.

1.2.1 ***Types, classes, and sizes.*** Paulins shall be of the following types, classes, and sizes as specified (see 6.3).

Type I.—With grommets or loops.

Type II.—With grommets or loops and tie ropes.

Class 1.—Cloth, cotton, duck, No. 6, hard texture, olive drab.

Size
5 by 5 feet.
10 by 6 feet.
12 by 10 feet.
17 by 12 feet.
20 by 20 feet.
23 by 15 feet.
26 by 22 feet.
30 by 15 feet.
40 by 20 feet.
40 by 30 feet.

Class 2.—Cloth, cotton, duck, No. 6 hard texture, deck grey.

Size
8 by 8 feet.
15 by 15 feet.
20 by 20 feet.

Class 3.—Cloth, cotton, duck, No. 11, hard texture, olive drab.

Size
7 by 15 feet.
7 by 16 feet.
7 by 18 feet.
16 by 16 feet.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS


2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

Federal Specifications:

T-R-00605—Rope, Manila and Sisal.
T-R-00616—Rope; Mildew-Resistant.
T-T-871—Twine, Cotton, Wrapping.
T-T-911—Twine, Jute.
V-T-276—Thread, Cotton.
V-T-285—Thread, Polyester.
CCC-C-419—Cloth, Cotton, Duck, Unbleached, Plied-Yarns, (Army and Numbered).
CCC-C-428—Cloth, Cotton Duck, Fire, Water, Weather, and Mildew Resistant.
CCC-C-429—Cloth, Cotton, Osnaburg.
CCC-C-467—Cloth, Jute (or Kenaf), Burlap.

FSC 8340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

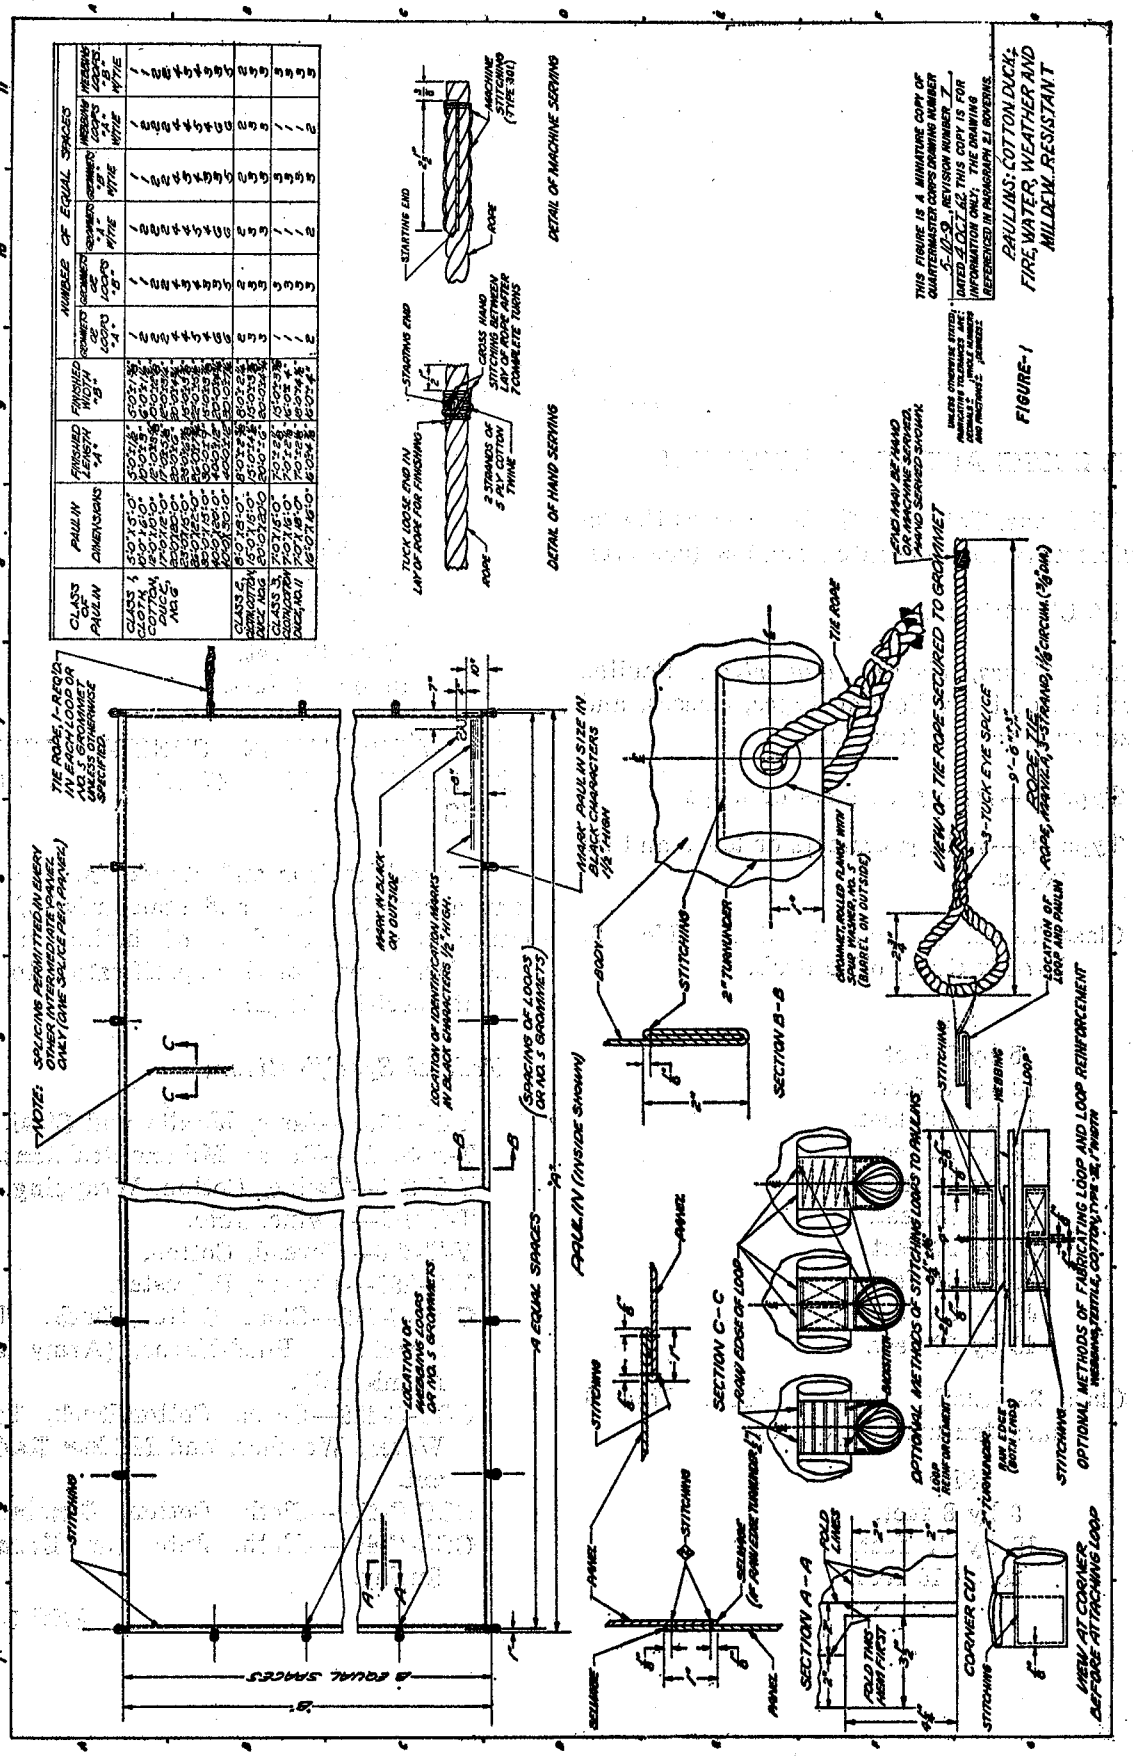

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

Federal Specifications (Continued):

DDD-L-20—Labels, For Clothing, Equipage, and Tentage, (General Use).

PPP-B-576—Box, Wood, Cleated, Veneer, Paper Overlaid.

PPP-B-585—Boxes, Wood, Wirebound.

PPP-B-601—Boxes, Wood, Cleated-Plywood.

PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian agencies).

Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL-W-530—Webbing and Tape, Textile, Cotton, General Purpose, Natural or in Colors.

MIL-T-3530—Treatments, Mildew Resistant and Water Repellent for Thread and Twine.

MIL-G-16491—Grommet, Metallic.

MIL-W-43061—Wax (Hand Sewing and Machine Stitching).

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

Drawing (Quartermaster Corps.):

5-10-9—Paulins: Cotton Duck; Fire, Water, Weather, and Mildew Resistant

(Copies of Military Specifications, Standards, and Drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Figure 1 is a miniature reproduction of referenced drawing and is attached for information only.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

Department of the Army Technical Manual 10-269:

Repair of Canvas and Webbing.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D. C.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.3), before production is commenced, a sample of the item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

in the same facilities to be used for the manufacture of the production items.

3.2 Materials.

3.2.1 *Cloth, cotton, duck.* The cloth, before finishing, shall be No. 6, hard texture (for classes 1 and 2 paulins) and No. 11, hard texture (for class 3 paulins), conforming to CCC-C-419.

3.2.1.1 *Color and treatment.* The finished cloth shall conform to type I, class 1 (for classes 1 and 3 paulins), and type II, class 1 (for class 2 paulins) of CCC-C-428.

3.2.2 *Webbing, textile, cotton.* The webbing shall conform to type III, class 4, 1-inch width of MIL-W-530. The webbing shall be dyed olive drab 7 for class 1 and class 3 paulins, and deck gray for class 2 paulins. The color of the dyed webbing shall match the standard shade sample when available (see 6.4).

3.2.3 *Thread, polyester.* The thread shall conform to type I, class 1 or type II, class 1 or V-T-285. Sizes shall be as follows:

For all stitching except overedge stitching	Size FF
For overedge stitching	Size E

3.2.3.1 *Color.* The thread for class 2 paulins shall be natural in color. The thread for classes 1 and 3 paulins shall be dyed shade S-1 (Cable No. 66022). The dyed thread shall show fastness to weathering equal to or better than the standard sample (see 6.4). If no standard sample is available, the thread shall show good fastness to weathering.

3.2.4 *Thread, cotton.* The thread for machine serving rope ends shall conform to ticket No. 8, 3-ply, type III B for needle and type III A for bobbin of V-T-276.

3.2.4.1 *Color and treatment.* The thread shall be unbleached and shall be mildew-resistant treated conforming to type I, class 1 treatment of MIL-T-3530.

3.2.5 *Twine, cotton, 5-ply (mildew-resistant treated).* The twine shall conform to type II, class 1 of T-T-871.

3.2.6 *Wax, stitching.* The stitching wax shall be golden and shall conform to type II of MIL-W-43061.

3.2.7 *Rope, manila, 1-1/8 inch circumference, (mildew-resistant treated).* The rope shall conform to type M, class 2 of T-R-00605 and shall be mildew-resistant treated with copper 8-quinolinolate in accordance with T-R-00616.

3.2.8 *Grommets, metallic, brass, black chemical finish, rolled flange with spur washer, No. 5.* The grommets with washers shall conform to type III, class 3 of MIL-G-16491.

3.3 Construction. The construction shall conform in all respects to drawing 5-10-9 and as specified herein.

3.3.1 *Stitching, machine.*

3.3.1.1 *Types of stitching.* Stitching shall conform to Fed. Std. No. 751 as follows:

For all stitching except stitching indicated by "Z" on drawing	Type 301, 5 to 7 stitches per inch.
For stitching indicated by "Z" on drawing	Type 401, 5 to 7 stitches per inch.

3.3.1.1.1 *Type 301 stitching.* Thread breaks in stitching shall be backstitched not less than 1 inch at each break. Stitching shall be backstitched not less than 1 inch at the ends except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching and that the lock will be embedded in the center of the materials sewed. All thread ends shall be trimmed.

3.3.1.1.2 *Type 401 stitching.* Thread breaks in stitching shall be overstitched not less than 1-1/2 inches at each break. Thread tension shall be maintained so that there will be no loose stitching. All thread ends shall be trimmed.

3.3.2 *Setting of grommets.* Holes punched to receive the grommets shall be smaller

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommets shall be tightly clinched without cutting the materials.

3.3.3 *Splicing of rope.* Splicing shall be done in a tight and workmanlike manner. After splice has been completed, all ends of strands shall be clipped to a length of not less than 1 inch nor more than 1-1/4 inches.

3.3.4 *Serving ends of tie ropes.* The free ends of the manila tie ropes shall be either machine or hand served.

3.3.4.1 *Machine serving.* Machine serving shall be done with a machine capable of using hot wax specified in 3.2.6 and the thread shall be thoroughly impregnated with the wax.

3.3.4.2 *Hand serving.* All hand serving as indicated on drawing shall be done with twine specified in 3.2.5, using two strands twisted together.

3.3.5 *Splicing of panels.* Unless otherwise specified, the intermediate panel or panels may be made of two pieces of duck, but not more than two pieces. Spliced panels shall be nonadjacent to each other, and the two outside panels shall not be spliced. Spliced panels shall consist of only two pieces of duck, and the short length shall be not less than one yard in length.

3.3.6 *Repairs.* Repairs, when authorized by the contracting officer, shall be effected in accordance with Department of the Army Technical Manual 10-269, except that handsewn or glued patches will not be acceptable.

3.4 **Marking.** The identification marking shall be applied to the location shown on the drawing and shall conform to type IV, class 8 of DDD-L-20 and the time of exposure to accelerated weathering shall be 100 hours. The letters "US" shall be applied in the size characters and in the location indicated on the drawing and shall conform to type IV, class 9 of DDD-L-20. Fastness of the class 9 marking shall be as specified for class 8 marking.

3.5 **Workmanship.** The end item shall conform to the quality and grade of product established by this specification, and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 **Contractor's inspection responsibility.** Unless otherwise specified, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Preproduction sample inspection.** When a preproduction sample is required, inspection and testing of the preproduction sample (see 3.1) shall be made of the completed items for all provisions of this specification applicable to end product examination and tests.

4.3 **Sampling and inspection for acceptance.** Except when otherwise specified by Civil Government agencies, sampling and inspection for acceptance shall be in accordance with provisions of MIL-STD-105.

4.3.1 *Inspection of the end item.*

4.3.1.1 *Examination of the end item.* The defects found during examination shall be classified in accordance with the list shown in tables I and II. The sample unit for these examinations shall be one finished paulin. The lots shall be inspected in accordance with 4.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE I.—*Examination for visual characteristics*

Examine	Defect	Classification		
		Major	Minor	
			A	B
Fabric	Holes, (except drill holes) cuts or tears, any smash, broken or missing yarns, or open places clearly visible at normal inspection distance	X		
	Exposed drill holes, i.e., not covered by attached parts			X
	Coarse or heavy filling bar clearly visible at normal inspection distance		X	
Webbing	Not firmly and tightly woven; edges frayed or scalloped	X		
Seams and stitching: Open seams	On stitch type 301:			
	—1/2 inch or more, but not more than 1 inch			X
	—More than 1 inch		X	
	On stitch type 401, except run-offs	X		
	Run-offs:			
	—More than 1/2 inch, but not more than 1 inch			X
	—More than 1 inch		X	
	Note: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams a seam shall be considered open when either one or both sides of seam are open.			
Raw edges (except on webbing loop ends and loop reinforcement ends)	When securely caught in stitching:			
	—More than 1 inch, but not more than 3 inches			X
	—More than 3 inches		X	
	Note: Raw edges not securely caught in stitching shall be classified as open seams.			
Run-offs (see open seams)				
Seam and stitch types	Wrong seam or stitch type	X		
Stitch tension	Loose, resulting in a loosely exposed bobbin or top thread; tight, resulting in excessive puckering of fabric on seams			X
Stitches per inch	One stitch less than minimum specified		X	
	Two or more stitches less than minimum specified	X		
	One or more stitches in excess of maximum specified			X
	Note: Variation in the number of stitches per inch, caused by operator's speeding up the machine and pulling the fabric in order to sew over heavy seams or heavy places, or in turning corners shall be classified as follows:			
	a. Within the major defect classification—Minor A defect			
	b. Within the minor A defect classification—Minor B defect			
	c. Within the minor B defect classification—No defect			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE I.—*Examination for visual characteristics (cont'd)*

Examine	Defect	Classification		
		Major	Minor	
			A	B
Stitching margins, gage	Not as specified		X	
Thread breaks	Stitch type 301; backstitched less than 1 inch			X
	Stitch type 401; overstitched less than 1-1/2 inches			X
	Note: Thread breaks not backstitched or not overstitched shall be classified as open seams.			
Stitching ends	Backstitched, less than 1 inch (except where ends are held down by other stitching or turned under in a hem)		X	
Components and assembly	Any component part or required operation omitted (unless otherwise specified herein)	X		
	Note: To determine number of loops or grommets required per paulin, see Drawing 5-10-9.			
	Needle chews	X		
	Seams badly pleated			X
	One or more repaired rows of stitching omitted	X		
Repairs	Repairs not in accordance with Department of the Army Technical Manual 10-269 or not authorized by the Contracting Officer	X		
Panel splicing	More than one splice per intermediate panel; any two adjacent panels spliced at the same location; end panels spliced			X
Cleanness	Grease or oil stains clearly noticeable; thread ends not trimmed throughout			X
Marking; size, US, and identification	Omitted, illegible, incorrect or misplaced			X
Hems	Constructed with a single turnunder instead of double	X		
	Smaller than specified width:			
	—By more than 1/4 inch but not more than 1/2 inch			X
	—By more than 1/2 inch		X	
Grommets	Broken or malformed, failing to serve intended purpose; protective finish omitted; corroded areas; burr or sharp edge which may cause injury in handling	X		
	Size or type used, not as specified		X	
	Clinched loosely, causing grommets to rotate in hole, or excessively tight cutting surrounding fabric			X
	Improperly set, i.e., two or more teeth exposed inside of barrel			X
	Set off center of hems by more than 3/8 inches		X	
	Set unequally spaced by more than 1-1/2 inches		X	
Loops	Ends of loops uneven with inner edge of hems by more than 1/8 inch			X
	Stitched to hems with inner edges overlapped or not abutted by more than 1/8 inch			X
	Stitching attaching loops to hems or reinforcement to loops other than optional methods indicated on Drawing 5-10-9, or optional methods used not as specified.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE I.—*Examination for visual characteristics (cont'd)*

Examine	Defect	Classification		
		Major	Minor	
			A	B
Loops (cont'd)	Set unequally spaced (from center to center of loops) by more than 1-1/2 inches		X	
	Corner loops set with outer edges uneven with edges of hem by more than 1/8 inch			X
	Edges of loop reinforcement uneven with edges of loops by more than 1/8 inch			X
Tie ropes on type II	Cuts or abrasions	X		
	Eye splice not as specified; free ends not finished as specified		X	

TABLE II.—*Examination for dimensions*

Examine	Defect	Classification		
		Major	Minor	
			A	B
Overall dimensions	Smaller than nominal dimensions less applicable minus tolerances indicated on drawing, but not smaller than nominal dimensions less twice the applicable tolerance		X	
	Smaller than nominal dimensions less twice the applicable minus tolerance indicated on drawing	X		
	Larger than nominal dimensions and applicable plus tolerance indicated on drawing			X
Loops and tie ropes	Not within specified tolerance			X

4.3.1.1.1 *Inspection levels and acceptable quality levels.* Acceptable quality levels, expressed in defects per hundred units, and inspection levels shall be as follows:

Examination	Inspection level	AQL
Visual characteristics (see table I)	II	4.0 Major 10.0 Major and minor A 40.0 Total major, minor A and B defects combined
Dimensional characteristics (see table II)	L6	10.0 Major 25.0 Major and minor A 65.0 Total major A and B defects combined

4.3.2 *Examination of preparation for delivery requirements.* An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be L-4 and the AQL shall be 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of cloth wrapping, loose stitching or strapping, inadequate nailing or stapling. Bulging or distortion of containers.
Content	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to for definitions and application of the various levels of packaging and packing for civil agency procurements.)

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.3).

5.1.1 *Level A.* Each paulin shall be laid out flat. Tie ropes, where applicable, shall be placed toward the center of the paulin. Each paulin shall then be folded neatly and compactly, and securely tied with twine conforming to type I or II, 16-ply of T-T-871. The portion of the paulin containing identification markings, if applicable, shall be on the outside of the folded paulin. Care shall be taken to expel all excess air during the folding operations.

5.1.2 *Level C.* Paulins shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.3).

5.2.1 *Level A.*

5.2.1.1 *Cloth-covered bundles.* Paulins of one type, class, and size only, packaged as specified in 5.1 shall be packed in quantities as specified in table III, wrapped and sewn in cotton osnaburg cloth conforming to type I, class 2, finish A of CCC-C-429; or jute (or kenaf) burlap cloth conforming to class 1 of CCC-C-467. The wrapping shall be securely sewn with type I or type II 16-ply cotton twine conforming to T-T-871 or 3-ply jute twine conforming to type I of T-T-911, with approximately one stitch to the inch and every third stitch knotted. Five inches of surplus covering shall be gathered together on each of the four corners and securely sewn into ears for handles. Alternatively, the cotton osnaburg cloth and jute (or kenaf) burlap cloth may be procured in a snug-fitting tubing form and closed in the manner as specified above.

5.2.1.2 *Rigid containers.* When specified by the procuring agency, paulins of one type, class, and size only, packaged as specified in 5.1 and packed in quantities as specified in table III, shall be packed in shipping containers that conform to overseas type of PPP-B-601; style A, class 2, type 2 load of PPP-B-576; style 1, 2, or 2A, class 3 use, type 2 load of PPP-B-585; or class 2, style 2 or 4 of PPP-B-621.

5.2.2 *Level B.*

5.2.2.1 *Cloth covered bundles.* Unless otherwise specified, paulins shall be packed as specified in 5.2.1.1.

5.2.2.2 *Rigid containers.* When specified by the procuring agency, paulins of one type, class, and size only, packaged as specified in 5.1 and packed in quantities as specified in table III, shall be packed in shipping containers that conform to domestic type style A or B of PPP-B-601; style A, class 1, type 2 load of PPP-B-576; style 1, 2 or 2A, class 1 use, type 2 load of PPP-B-585; or class 1, style 2 or 4 of PPP-B-621.

5.2.3 *Level C.* Paulins, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Shipments shall be in accordance with rules and regulations of car-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

riers applicable to the mode of transportation.

5.2.4 *All levels.* As far as practicable, packs shall be of such a size to lend themselves to palletization on 40- by 48-inch pallets. Finished packs will be permitted to overhang the pallet 1-1/2 inches on either side of the 40-inch width and 2 inches on either side of the 48-inch dimensions.

TABLE III.—*Paulin quantity per pack*

Paulin area in square feet (sq. ft.)	Class 1 and 2 (each)	Class 3 (each)
0 to 45 sq. ft., incl.	15	—
46 to 64 sq. ft., incl.	10	—
65 to 120 sq. ft., incl.	5	10
121 to 225 sq. ft., incl.	3	5
226 to 400 sq. ft., incl.	2	3
401 sq. ft. and over	1	—

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, cloth covered bundles or rigid containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, cloth covered bundles or rigid containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Noncoated paulins. For purposes of this specification, noncoated paulins are defined as those whose surfaces are not coated with natural or synthetic rubber, resins, or other sealing compounds.

6.2 Intended use. Classes 1 and 2 paulins are for heavy-duty truck cover, construction, and general marine service use. Class 3 paulins are for light-duty general paulin use and for use where weight is a factor when transported by personnel.

6.3 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Type, class, and size required (1.2).
(*c*) Whether loops or grommets are required (1.2.1).
(*d*) When preproduction sample is required (3.1).
(*e*) Civil agencies—option on inspection procedure (4.3).
(*f*) Selection of applicable levels of packaging and packing (5.1 and 5.2).

6.3.1 For civil agency procurement, where level B packaging is specified in the contract or order, the requirements in 5.1.1 (level A) shall apply.

6.4 For access to a standard shade sample of cloth cotton duck and webbing and a standard sample of thread, address the procuring office issuing the invitation for bids.

6.5 Supersession. This specification supersedes Military Specifications MIL-P-10404A, 28 September 1951, and MIL-P-16419A, 12 March 1962 in part.

6.6 This specification covers noncoated fire, water, weather and mildew-resistant paulins authorized for repetitive procurement in the Government services. All paulins procured under this specification for use by military services will include webbing loops (rather than grommets) and will not include tie ropes.

6.7 Transportation description. The transportation descriptions and minimum weights. applicable to this commodity are:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

Rail:

Paulins, not otherwise indexed by name.

Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:

Paulins not otherwise indexed.

Truckload minimum weight 24,000 pounds subject to Rule 115, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:

Army—GL

Navy—S

Air Force—MAA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.