INCH-POUND
A-A-59666C
9 April 2020
SUPERSEDING
A-A-59666B
7 June 2010

COMMERCIAL ITEM DESCRIPTION

CYLINDER, COMPRESSED GAS: DOT SPECIFICATIONS 4B, 4BA, 4BW, AND 4E

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) provides the acquisition requirements for the purchase of empty compressed gas cylinders to be used for storage, transportation, and distribution of low pressure liquefied compressed gases including refrigerants, liquefied petroleum gases, and fire extinguishing agents.

2. CLASSIFICATION. The cylinders shall be classified by the types, classes, sizes, service pressures, and valve specifications listed below:

Type I - steel cylinder
II - aluminum cylinder

Class - intended gas service (see table I)

Size - for refrigerant and fire fighting agent cylinders (see table II)
- for liquefied petroleum gas cylinders (see table III)

Service pressure (see table IV)

Valve specification (see table V)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DLA Aviation, VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil

AMSC N/A FSC 8120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Material, design, and construction. The cylinders shall be manufactured, inspected, and tested in accordance with Department of Transportation (DOT) specifications 4B, 4BA, 4BW for type I (steel) cylinders or 4E for type II (aluminum) cylinders as specified in the acquisition order (see 7.3(b)) in accordance with 49 CFR 178, Subpart C, "Specifications for Cylinders". The applicable DOT specification shall be specified in the acquisition order (see 7.3(c)). The cylinders supplied shall be newly fabricated within one year of the manufacture date, completely clean, dry, and empty.

3.2 Intended gas service. The intended gas service shall be designated by the class codes found in table I (see 7.3(d)). Cylinder and valve compatibility with the intended gas product shall comply with the requirements of this document and 49 CFR 173.304, "Filling of Cylinders with Liquefied Compressed Gases".

TABLE I. Intended gas service.

Class code	Item name code[1,2]	Gas product[3]
A1	03396	Generic applications
B1	49455	Bromochlorodifluoromethane [Ralon 1211; Freon 12B1]
C1	49456	Butane
D1	49457	Butane-Propane Mixtures
E1	49467	Dibromodifluoromethane [Ralon 1202; Freon 12B2]
F1	49468	Dichlorodifluoromethane [R-12]
G1	49469	Dichlorodifluoromethane and Difluoroethane, Azeotropic
H1	49470	Dichlorotetrafluoroethane [R-114]
J1	35415	Ethyl Chloride
K1	16845	Ethylene Oxide
L1	49475	Ethylene
M1	16847	Hydrogen Chloride, Anhydrous
N1	49489	Hydrogen Sulfide
P1	49507	Propane
R1	49508	Sulfur Dioxide
S1	49510	Trichloromonofluoromethane [R-11]
T1	49511	Trichlorotrifluoroethane [Freon-113]
U1	49513	Monochlorotrifluoromethane [R-13]
V1	49514	Monochlorodifluoromethane [R-22]
W1	49515	Monobromotrifluoromethane [Ralon 1301]
X1	49518	Monochlorodifluoromethane and Monochloropentafluoroethane, Azeotropic Mixture
A2	N/A	Difluoromethane [R-32]
B2	51169	Dichlorotrifluoroethane [R-123]

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE I. Intended gas service - Continued.

Class code	Item name code[1]	Gas product
C2	51167	Dichlorotrifluoromethane (74%); Difluoroethane (26%) [R-500]
D2	51167	Difluoromethane (50%); Pentafluoroethane (50%) [R-410A]
E2	51167	Difluoromethane (45%); Pentafluoroethane (55%) [R-410B]
F2	51167	Difluoromethane (20%); Pentafluoroethane (40%); Tetrafluoroethane (40%) [R-407A]
G2	51167	Difluoromethane (10%); Pentafluoroethane (70%); Tetrafluoroethane (20%) [R-407B]
H2	51167	Difluoromethane (23%); Pentafluoroethane (25%); Tetrafluoroethane (52%) [R-407C]
J2	51167	Monochlorodifluoromethane (49%); Monochloropentafluoroethane (51%) [R-502]
K2	51167	Monochlorodifluoromethane (53%); Difluoroethane (13%); Monochlorotetrafluoroethane (34%) [R-401A]
L2	51167	Monochlorodifluoromethane (61%); Difluoroethane (11%); Monochlorotetrafluoroethane (28%) [R-401B]
M2	51167	Monochlorodifluoromethane (45%); Difluoroethane (7%); Monochlorodifluoroethane (5.5%); Octafluorocyclobutane (42.5%) [R405-1]
N2	51167	Monochlorodifluoromethane (60%); Monochlorotetrafluoroethane (25%); Monochlorodifluoroethane (15%) [R-409A]
P2	51167	Monochlorodifluoromethane (55%); Isobutane (4%); Monochlorodifluoroethane (41%) [R-406A]
R2	51167	Monochlorodifluoromethane (44%); Octafluoropropane (56%) [R-509A]
S2	51167	Monochlorodifluoromethane (70%); Octafluoropropane (5%); Monochlorotetrafluoroethane (25%) [R-412A]
T2	N/A	Monochlorotetrafluoroethane [R-124]
U2	N/A	Pentafluoroethane [RFC-125]
V2	51167	Pentafluoroethane (60%); Propane (2%); Monochlorodifluoromethane (38%) [R-402A]
W2	51167	Pentafluoroethane (38%); Propane (2%); Monochlorodifluoromethane (60%) [R-402B]
X2	51167	Pentafluoroethane (50%); Trifluoroethane (50%) [R-507A]
Y2	51167	Pentafluoroethane (44%); Trifluoroethane (52%); Tetrafluoroethane (4%) [R-404A]
Z2	51167	Pentafluoroethane (7%); Trifluoroethane (46%); Monochlorodifluoromethane (47%) [R-408A]

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE I. Intended gas service - Continued.

Class code	Item name code[1]	Gas product
A3	51167	Propylene (1.5%); Monochlorodifluoromethane (87.5%); Difuoroethane (11%) [R-411A]
B3	51167	Propylene (3%); Monochlorodifluoromethane (94%); Difuoroethane (3%) [R-411B]
C3	50311	Tetrafluoroethane [R-134A]
D3	N/A	Trifluoroethane [R-143A]
E3	N/A	Trifluoromethane [R-23]
F3	51167	Trifluoromethane (39%); Hexafluoroethane (61%) [R-508A]
G3	51167	Trifluoromethane (40%); Monochlorotrifluoromethane (60%) [R-503]
H3	66461	Heptafluoropropane [RFC-227; FM200; Apaflurane]

[1] The item name codes are listed in the Federal Item Identification Guide (FIIG) T162.

[2] Item name code 51167 is Cylinder, Compressed Gas Refrigerant Gas Mixtures. The class code along with the item name code designates the type and proportions of the refrigerant gas mixture.

[3] Common trade names are given in brackets for convenience. Inclusion or exclusion of a trade name does not in any way express approval, disapproval, or whether a product sold under that trade name fits the needs of this and other specifications.

3.3 Preconditioning and internal preservation. After hydrostatic and any other testing, cylinder internal surfaces shall be cleaned and dried to be free of moisture, oil, grease, grit, machining products, loose scale, slag, or other foreign materials. Rust bloom or particulate matter (approximately 1.0 to 1.5 grams) generated subsequent to inspection as a result of handling and shipping is acceptable. Cylinders tested hydrostatically and/or internally flushed for cleaning or cylinders that were tested or flushed with moisture laden air shall be immediately dried with hot filtered air or nitrogen to insure the effluent air or gas has a dew point of less than 40 ˚F (4.4 ˚C) when tested in accordance with ASTM D2029 or by equivalent method. Immediately after internal drying, the cylinder shall be closed with the designated valve or plug. If the cylinder is closed with a valve, it shall be pressurized to approximately 5 pounds per square inch gage (psig) with dry oil-free nitrogen type I, grade A or B, class I, in accordance with A-A-59503, "Nitrogen, Technical", or type I, grade L or better, in accordance with Compressed Gas Association (CGA) G-10.1, "Commodity Specification for Nitrogen". The cylinder shall then be tagged at the valve "PRESERVED WITH NITROGEN GAS".

3.4 Water capacity. The cylinder water capacity shall comply with the applicable DOT 4B, 4BA, 4BW, or 4E requirements for the intended gas service as specified in 49 CFR 173.304 and with any additional requirements specified in the acquisition order (see 7.3(e)).

3.5 Size. The cylinder size shall be one of the coded options listed in tables II and III (see 7.3(f)). The outside diameter and the height to the base of the valve shall be as specified in tables II and III for the size cylinder selected. The dimensional tolerances shall be ±0.25 inch in diameter and ±1.00 inch in height. Where tighter tolerances are required, they shall be cited in the procurement document and shall take precedence over the tolerances cited here.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3.6 Tare weight. The cylinder's maximum tare weight shall be as specified in tables II and III (see 7.3(g)), and shall be inclusive of the valve and cylinder but without the valve protection cap. The tare weight shall be stamped into the head of the cylinder in a position other than in sequence with another DOT permanent marking. The marking shall be displayed as required by CGA C-26, "Guideline for the Post Manufacture Tare Weight Marking of Cylinders". The marking shall represent the tare weight of the cylinder and valve with an accuracy of one percent and shall be displayed in pounds (LB) and ounces (OZ) unless otherwise specified.

TABLE II. Cylinder sizes: refrigerants and fire fighting agents.

Size code	Diameter (inches)	Height[1] (inches)	Tare weight (lbs.)	Water capacity (lbs.)	Volume (cubic inches)
A	6.75	11.0	16	8.5	236
B	6.75	21.0	20	21.5	596
C	8.18	27.0	30	42.0	1,165
D	12.18	36.0	60	122.0	3,384
E	10.18	49.0	60	122.0	3,384
F	30.0	50.0	575	1,000.0	27,737

[1] Height to base of valve.
[2] Unless otherwise specified, the cylinder inlet threads shall be 3/4 - 14 NGT.

TABLE III. Cylinder sizes: liquefied petroleum gas.

Size code	Capacity (lbs.)	Diameter (inches)	Height[1] (inches)	Tare weight (lbs.)	Water capacity (lbs.)	Volume (cubic inches)
Steel						
G	20.0	12.25	13.75	18.5	47.6	1,320
H	30.0	12.25	20.00	25.5	71.4	1,980
I	40.0	12.25	25.12	30.0	95.2	2,640
J	60.0	12.16	37.37	45.0	143.0	3,966
K	100.0	14.75	42.50	77.0	240.0	6,657
L	200.0	24.00	34.06	142.0	476.0	13,203
M	300.0	30.00	34.00	216.0	714.0	19,804
N	420.0	30.00	45.62	270.0	1,000.0	27,737
O	25.5	9.00	29.00	27.0	60.7	1,684
Aluminum						
P	60.0	12.19	37.38	58.0	143.0	3,966
Q	100.0	14.50	43.69	72.0	238.0	6,601
R	20.0	12.25	14.75	13.0	47.6	1,320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

S	30.0	12.50	21.00	16.5	71.5	1,983
T	33.0	12.25	22.37	16.0	80.0	2,219
U	40.0	12.50	26.53	19.5	95.3	2,644

[1] Height to base of valve.
[2] Unless otherwise specified, the cylinder inlet threads shall be 3/4 - 14 NGT.

3.7 Service pressure. The cylinder service (operating) pressure shall be one of the coded options listed in table IV (see 7.3(h)). The rated service pressure for cylinders in liquefied compressed gas applications shall not be less than the pressures cited in 49 CFR 173.301, "General Requirements for Shipment of Compressed Gases and other Hazardous Materials in Cylinders, UN Pressure Receptacles and Spherical Pressure Vessels", and 49 CFR 173.304.

TABLE IV. Service pressure.

Code	Service pressure (psig)
A	240
B	260
C	300[1]
D	400[1]

[1] Refrigerants and fire fighting agents only.

3.8 Cylinder ownership markings. The U.S. Government ownership symbol, "US GOVT", as originally registered with the Bureau of Explosives and now the DOT, shall be stamped into the shoulder of the cylinder in letters 3/8 inch high. Cylinders less than 4 inches in diameter shall be stamped in 1/4-inch letters. The symbol shall be stamped directly below or offset 90 degrees from the DOT permanent markings.

3.9 Treatment and painting. The treatment and painting of cylinders shall be in accordance with MIL-T-704 or equivalent. The cylinders shall be color coded and stenciled in accordance with the requirements of MIL-STD-101, "Color Code for Pipelines and for Compressed Gas Cylinders", for the designated gas for which the cylinder is designed. Paint shall be uniform in colors conforming to SAE AMS-STD-595.

3.9.1 Bottom coating. Calcium sulfonate coating, such as Watson Armor Shield or an equivalent, shall be applied to each dry, clean steel cylinder bottom and footring, when applicable, as soon as practicable after cleaning processes are completed. Dry film thickness of the bottom coating shall be 3.0 to 7.0 one-thousandth of an inch (mil).

3.10 Components. The cylinder shall be fitted with a neck flange with a mated valve protection cap. The cylinder shall also be supplied with the designated valve or plug as specified.

3.10.1 Neck flange. Each cylinder neck flange shall be a welded part of the cylinder head and shall be free of visible defects (cracks, pits, scales, etc.) or foreign materials (sand, flux, etc.). The flange threads shall be free of any damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3.10.2 Valve protection cap. The cylinder neck flange shall mate with a valve protection cap of the size and thread as designated for the neck flange. The cap shall turn smoothly and freely on its threads to full thread engagement. The cap shall be free of any cracks or dents and shall be painted the same color and with the same quality as the shoulder of the cylinder.

3.10.3 Closure. If required, the cylinder shall be furnished with a designated valve according to A-A-59860, "Valves, Cylinder, Gas (for Compressed or Liquefied Gases)". The valve shall be one of the coded options listed in table V (see 7.3(i)). The valve shall meet all of the requirements of A-A-59860 as referenced by the valve part or identification number (PIN). When a valve is not designated, the cylinder shall be closed with a brass plug (hex wrenching flats) and Teflon® or equivalent polytetraflouroethylene (PTFE) tape conforming to A-A-58092 to afford proper sealing and easy removal.

TABLE V. Valve specification.

Valve code	Former detail specification number[1]	A-A-59860 valve PIN
001 002	MIL-DTL-2/1	AA59860-001 AA59860-002
003 004	MIL-DTL-2/2	AA59860-003 AA59860-004
005 006	MIL-DTL-2/3	AA59860-005 AA59860-006
007 008 009 010 011	MIL-DTL-2/5	AA59860-007 AA59860-008 AA59860-009 AA59860-010 AA59860-011
012 013 014 015 016	MIL-DTL-2/6	AA59860-012 AA59860-013 AA59860-014 AA59860-015 AA59860-016
017	MIL-DTL-2/7	AA59860-017
018	MIL-DTL-2/8	AA59860-018
019	MIL-DTL-2/9	AA59860-019
020	MIL-DTL-2/10	AA59860-020
021 022 023 024 025	MIL-DTL-2/11	AA59860-021 AA59860-022 AA59860-023 AA59860-024 AA59860-025
094	MIL-DTL-2/47	AA59860-094
095 096	MIL-DTL-2/48	AA59860-095 AA59860-096
097	MIL-DTL-2/50	AA59860-097
098	MIL-DTL-2/51	AA59860-098
099 100 101 102 103 104 105 106 107 108	MIL-DTL-2/52	AA59860-099 AA59860-100 AA59860-101 AA59860-102 AA59860-103 AA59860-104 AA59860-105 AA59860-106 AA59860-107 AA59860-108
109 110 111 112	MIL-DTL-2/53	AA59860-109 AA59860-110 AA59860-111 AA59860-112
113 114	MIL-DTL-2/54	AA59860-113 AA59860-114
115 116 117 118 119	MIL-DTL-2/55	AA59860-115 AA59860-116 AA59860-117 AA59860-118 AA59860-119

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE V. Valve specification - Continued.

Valve code	Former detail specification number[1]	A-A-59860 valve PIN
026	MIL-DTL-2/14	AA59860-026
027		AA59860-027
028		AA59860-028
029		AA59860-029
030	MIL-DTL-2/15	AA59860-030
031		AA59860-031
032	MIL-DTL-2/16	AA59860-032
033		AA59860-033
034	MIL-DTL-2/17	AA59860-034
035	MIL-DTL-2/18	AA59860-035
036	MIL-DTL-2/19	AA59860-036
037		AA59860-037
038		AA59860-038
039	MIL-DTL-2/20	AA59860-039
040	MIL-DTL-2/21	AA59860-040
041	MIL-DTL-2/22	AA59860-041
042		AA59860-042
043		AA59860-043
044		AA59860-044
045		AA59860-045
046		AA59860-046
047		AA59860-047
048		AA59860-048
049		AA59860-049
050		AA59860-050
051		AA59860-051
052		AA59860-052
053		AA59860-053
054		AA59860-054
055		AA59860-055
056		AA59860-056
057		AA59860-057
058		AA59860-058
059		AA59860-059
060		AA59860-060
061	MIL-DTL-2/23	AA59860-061
062	MIL-DTL-2/24	AA59860-062
120	MIL-DTL-2/56	AA59860-120
121		AA59860-121
122		AA59860-122
123	MIL-DTL-2/57	AA59860-123
124		AA59860-124
125		AA59860-125
126	MIL-DTL-2/58	AA59860-126
127	MIL-DTL-2/59	AA59860-127
128		AA59860-128
129		AA59860-129
130	MIL-DTL-2/60	AA59860-130
131		AA59860-131
132	MIL-DTL-2/61	AA59860-132
133	MIL-DTL-2/62	AA59860-133
134	MIL-DTL-2/63	AA59860-134
135	MIL-DTL-2/64	AA59860-135
136		AA59860-136
137	MIL-DTL-2/65	AA59860-137
138		AA59860-138
139	MIL-DTL-2/66	AA59860-139
140		AA59860-140
141		AA59860-141
142		AA59860-142
143		AA59860-143
144	MIL-DTL-2/67	AA59860-144
145		AA59860-145
146	MIL-DTL-2/68	AA59860-146
147		AA59860-147
148		AA59860-148
149		AA59860-149
150		AA59860-150
151	MIL-DTL-2/69	AA59860-151
152	MIL-DTL-2/70	AA59860-152
153		AA59860-153

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

TABLE V. Valve specification - Continued.

Valve code	Former detail specification number[1]	A-A-59860 valve PIN
063	MIL-DTL-2/26	AA59860-063
064		AA59860-064
065		AA59860-065
066		AA59860-066
067		AA59860-067
068	MIL-DTL-2/27	AA59860-068
069		AA59860-069
070	MIL-DTL-2/28	AA59860-070
071	MIL-DTL-2/29	AA59860-071
072		AA59860-072
073	MIL-DTL-2/37	AA59860-073
074		AA59860-074
075	MIL-DTL-2/38	AA59860-075
076	MIL-DTL-2/39	AA59860-076
077		AA59860-077
078		AA59860-078
079		AA59860-079
080		AA59860-080
081	MIL-DTL-2/41	AA59860-081
082		AA59860-082
083	MIL-DTL-2/42	AA59860-083
084	MIL-DTL-2/43	AA59860-084
085	MIL-DTL-2/44	AA59860-085
086		AA59860-086
087		AA59860-087
088		AA59860-088
089	MIL-DTL-2/46	AA59860-089
090		AA59860-090
091		AA59860-091
092		AA59860-092
093		AA59860-093
154	MIL-DTL-2/71	AA59860-154
155		AA59860-155
156		AA59860-156
157		AA59860-157
158		AA59860-158
159		AA59860-159
160		AA59860-160
161		AA59860-161
162		AA59860-162
163		AA59860-163
164	MIL-DTL-2/72	AA59860-164
165		AA59860-165
166		AA59860-166
167	MIL-DTL-2/73	AA59860-167
168	MIL-DTL-2/74	AA59860-168
169		AA59860-169
170	MIL-DTL-2/75	AA59860-170
171		AA59860-171
172	MIL-DTL-2/76	AA59860-172
173		AA59860-173
174		AA59860-174
175		AA59860-175
176		AA59860-176
177	MIL-DTL-2/77	AA59860-177
178		AA59860-178
179		AA59860-179
180		AA59860-180
181		AA59860-181
182		AA59860-182

[1] The former detail specification number is provided for cross-reference purposes only.

3.10.4 Neck rings or foot rings. When specified, the cylinder shall be furnished with a valve protection neck ring and/or foot ring (see 7.3(j)). The neck ring, also known as a collar, shall fully protect the cylinder valve from destructive damage during cylinder tip over and the foot ring shall hold the cylinder in a stable vertically upright position. Each shall be securely welded to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

cylinder heads. The valve protection ring shall be designed to provide easy attachment of the cylinder accessories.

3.10.5 Pressure relief device. If required, the cylinder and valve assembly shall be furnished with a pressure relief device (see 7.3(k)) as stipulated in the designated valve specification. When required, additional relief devices shall be installed in the cylinder shell. All pressure relief devices shall be selected, designed, and tested in accordance with CGA S-1.1, "Pressure Relief Device Standards - Part 1 - Cylinders for Compressed Gases".

4. REGULATORY REQUIREMENTS

4.1 Transportation safety. Manufacturers and users of compressed gas cylinders shall comply with all applicable DOT statutes and regulations for the inspection, test, storage, transportation, environmental impact, ownership accountability, and disposal of compressed gas cylinders and their contents.

4.2 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.3 Safety data sheet (SDS). Manufacturers shall prepare and submit a SDS in accordance with FED-STD-313, "Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities", and meeting the requirements of 29 Code of Federal Regulations § 1910.1200, "Occupational Safety and Health Standards: Hazard Communication".

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

5.3 Foreign manufacture. If the cylinder product being offered is foreign-made, the contractor shall offer manufacturer's records confirming that the fabrication meets the requirements of 49 CFR 178, Subpart C.

5.4 Manufacturer's and inspector's reports and records. The contractor or the cylinder manufacturer shall offer and make available the manufacturer's and inspector's reports and records confirming the fabrication of the purchased cylinders was performed by a DOT registered manufacturer and that all requirements of 49 CFR 178, Subpart C, and this purchase document have been met.


6. PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

6.1 Preservation, packaging, labeling, and marking. Unless otherwise specified in the acquisition order (see 7.3(l)), the cylinders supplied shall be preserved, packaged, labeled, and marked in accordance with 49 CFR 178. When required, palletization shall be as specified in the acquisition order (see 7.3(m)).

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

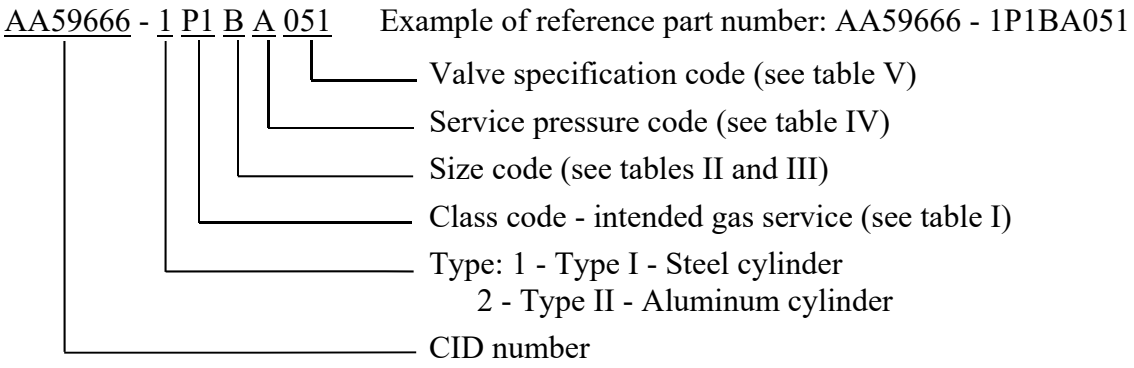

AA59666 - 1 P1 B A 051 indicates: steel cylinder; intended gas service 49507, propane; diameter 6.75 inches, height 21 inches, tare weight 20 pounds, water capacity 21.50 pounds, volume 596 cubic inches; service pressure 240 psig; valve PIN AA59860-051.

7.2 Sources of documents.

7.2.1 Electronic copies of CFR documents can be obtained from https://www.ecfr.gov.

7.2.2 Electronic copies of FAR documents may be obtained from https://www.acquisition.gov/browse/index/far.

7.2.3 Electronic copies of federal CIDs and standards can be obtained from https://quicksearch.dla.mil.

7.2.4 Electronic copies of federal FIIGs may be obtained from https://public.logisticsinformationservice.dla.mil/iig

7.2.5 Electronic copies of CGA publications may be obtained from https://www.cganet.com.

7.3 Ordering data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN.
b. Type (see 3.1).
c. Applicable DOT specification 4B, 4BA, 4BW, or 4E (see 3.1).
d. Intended gas service (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

e. Water capacity (see 3.4).
f. Size (see 3.5).
g. Tare weight (see 3.6).
h. Service pressure (see 3.7).
i. Valve, if required (see 3.10.3).
j. Neck ring/foot ring, if specified (see 3.10.4).
k. Pressure relief device, if required (see 3.10.5).
l. Preservation, packaging, labeling, and marking requirements, if different (see 6.1).
m. Palletization, if required (see 6.1).

7.4 Key words

Aluminum
Fire extinguishing
Liquefied
Petroleum
Refrigerant
Steel

7.5 Changes from previous issues. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

MILITARY INTERESTS:

Custodians:
Army - CE
Navy - SH
Air Force - 68
DLA - GS

Review Activities:
Navy - CG, MC, MS
Air Force - 11

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
DLA - GS7

(Project 8120-2020-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.