[INCH-POUND]
A-A-59714/2
15 April 2002

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

RESISTOR, RESETTABLE FUSES (NON-LINEAR THERMISTOR) RADIAL LEADED, STYLE RXE

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all agencies.

The complete requirements for procuring the low hold current, resettable fuse device described herein shall consist of this document and the issue in effect of CID A-A-59714.

CLASSIFICATION. This CID uses a classification system that is included in the Part Identification Number (PIN) as shown in the following example (see notes):

AA59714	02	-001
CID number	Applicable CID sheet (two digits)	Dash number (see applicable CID sheet)

SALIENT CHARACTERISTICS

Interface and physical dimensions. The resistors supplied to this CID shall meet the interface and physical dimensions as specified herein (see figure 1).

Power dissipation. The power dissipation shall be as specified in table I.

Voltage rating. The voltage rating shall be 60 V (max) for dash numbers 001 and 002, and 72V (max) for dash numbers 003 thru 017.

Hold current. The hold current shall be as specified in table I.

Trip current. The trip current shall be as specified in table I.

Resistance. The maximum and minimum resistance shall be as specified in table I.

Post trip resistance. The post trip resistance shall be as specified in table I.

Operating ambient temperature. The operating ambient temperature range shall be -40°C to +85°C.

Marking. Varistors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

AMSC N/A FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

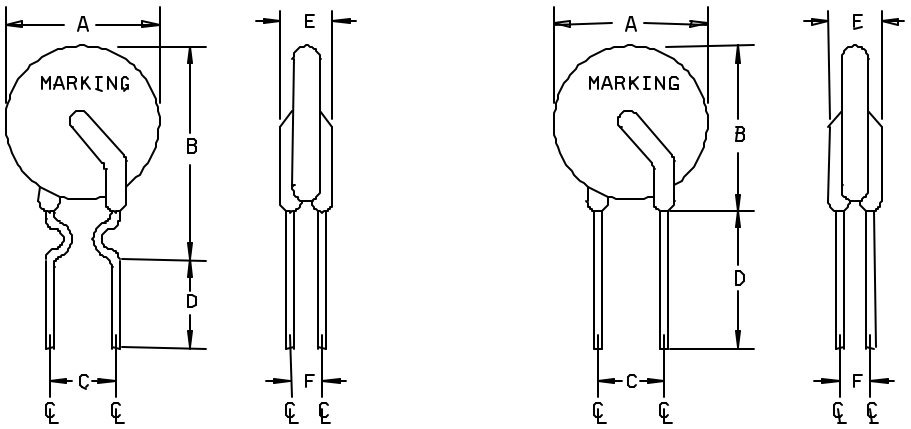

(See Note 2)

Dash number	Dimensions						
	A (max)	B (max)	C (min)	C (max)	D (min)	E (max)	F (Typical)
001	0.29 (7.4)	0.50 (12.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
002	0.29 (7.4)	0.50 (12.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.06 (1.6)
003	0.29 (7.4)	0.48 (12.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
004	0.29 (7.4)	0.50 (12.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
005	0.29 (7.4)	0.51 (13.0)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
006	0.30 (7.6)	0.53 (13.5)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
007	0.31 (7.9)	0.54 (13.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
008	0.38 (9.7)	0.57 (14.5)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
009	0.41 (10.4)	0.60 (15.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
010	0.46 (11.7)	0.62 (15.8)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.04 (1.1)
011	0.51 (13.0)	0.71 (18.0)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.06 (1.4)
012	0.57 (14.5)	0.77 (19.6)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.06 (1.4)
013	0.64 (16.3)	0.84 (21.3)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.06 (1.4)
014	0.70 (17.8)	0.90 (22.9)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.1)	0.06 (1.4)
015	0.84 (21.3)	1.04 (26.4)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.1)	0.06 (1.4)
016	0.98 (24.9)	1.18 (30.0)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.1)	0.06 (1.4)
017	1.12 (28.5)	1.32 (33.5)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.1)	0.06 (1.4)

NOTES:
1. Millimeters are in parenthesis.
2. All dash number are available in straight or kinked leads.

FIGURE 1. Case dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Rating and characteristics.

CID dash number	Hold current (amps)	Trip current (amps)	Power dissipation (watt)	Resistance (ohms) (min)	(max)	Post trip resistance (ohms)
001	0.10	0.20	0.38	2.50	4.50	7.50
002	0.17	0.34	0.48	3.30	5.21	8.00
003	0.20	0.40	0.41	1.83	2.75	4.40
004	0.25	0.50	0.45	1.25	1.95	3.00
005	0.30	0.60	0.49	0.88	1.33	2.10
006	0.40	0.80	0.56	0.55	0.86	1.29
007	0.50	1.00	0.77	0.50	0.77	1.17
008	0.65	1.30	0.88	0.31	0.48	0.72
009	0.75	1.50	0.92	0.25	0.40	0.60
010	0.90	1.80	0.99	0.20	0.31	0.47
011	1.10	2.20	1.50	0.15	0.25	0.38
012	1.35	2.70	1.70	0.12	0.19	0.30
013	1.60	3.20	1.90	0.09	0.14	0.22
014	1.85	3.70	2.10	0.08	0.12	0.19
015	2.50	5.00	2.50	0.05	0.08	0.13
016	3.00	6.00	2.80	0.04	0.06	0.10
017	3.75	7.50	3.20	0.03	0.05	0.08

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these resistors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source of documents.

Commercial Item Description

A-A-59714 - Resistors, Non-Linear Thermistor, Resettable Fuses, General Requirements for.

(Copies of federal specifications and standards are available from the Document Automation and Production Service, Building 4D, (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Ordering data. Ordering data is as specified in A-A-59714.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

TABLE II. Commercial products.

CID PIN	MFR's CAGE	MFR's name and address
AA5971402-***	06090	Tyco Electronics/Raychem Circuit Protection 308 Constitution Drive M/S R21 2A Menlo Park, CA 94025

Part number (P/N) supersession data. This CID supersedes the following manufacturers P/N as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

CID dash number AA5971402-	MFR's CAGE	MFR's P/N 1/		CID dash number AA5971402-	MFR's CAGE	MFR's P/N 1/
001	S6019	RXE010		010	S6019	RXE090
002		RXE017		011		RXE110
003		RXE020		012		RXE135
004		RXE025		013		RXE160
005		RXE030		014		RXE185
006		RXE040		015		RXE250
007		RXE050		016		RXE300
008		RXE065		017		RXE375
009		RXE075				

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

Government users. To acquire information on obtaining these resistors from the Government inventory system, Defense Supply Center, Columbus, ATTN: DSCC-CPB, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7678.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:

DLA - CC

Project 5905-1641-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.