[INCH-POUND]
A-A-59714/2A
14 July 2003
SUPERSEDING
A-A-59714/2
15 April 2002

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

RESISTOR, THERMAL, NON-LINEAR THERMISTOR (RESETTABLE FUSE) RADIAL LEADED, STYLE RXE

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all agencies.

The complete requirements for procuring the low hold current, resettable fuse device described herein shall consist of this document and the issue in effect of CID A-A-59714.

CLASSIFICATION. This CID uses a classification system that is included in the Part Identification Number (PIN) as shown in the following example (see notes):

AA59714	02	-001
CID number	Applicable CID sheet (two digits)	Dash number (see applicable CID sheet)

SALIENT CHARACTERISTICS

Interface and physical dimensions. The resistors supplied to this CID shall meet the interface and physical dimensions as specified herein (see figure 1).

Power dissipation. The power dissipation shall be as specified in table I.

Voltage rating. The voltage rating shall be 60 V (max) for dash numbers 001, 002, 018, 019, and 035 thru 064; and 72V (max) for dash numbers 003 thru 017, and 020 thru 034.

Hold current. The hold current shall be as specified in table I.

Trip current. The trip current shall be as specified in table I.

Resistance. The maximum and minimum resistance shall be as specified in table I.

Post trip resistance. The post trip resistance shall be as specified in table I.

Operating ambient temperature. The operating ambient temperature range shall be -40°C to +85°C.

Marking. Thermistors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

AMSC N/A FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

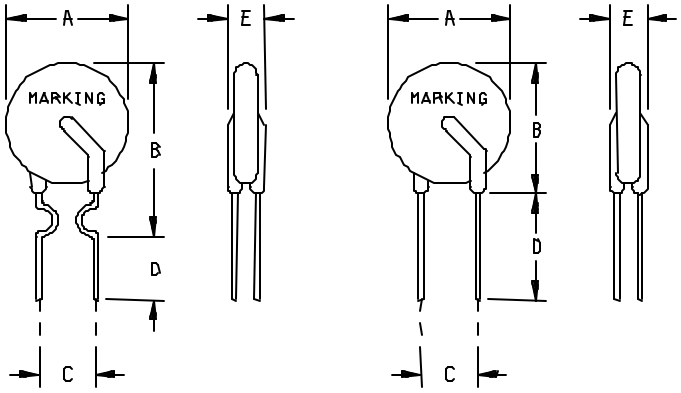

Dash number		Dimensions					
		A (max)	B (max)	C (min)	C (max)	D (min)	E (max)
001		0.29 (7.4)	0.50 (12.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
002		0.29 (7.4)	0.50 (12.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
003	035	0.29 (7.4)	0.48 (12.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
004	036	0.29 (7.4)	0.50 (12.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
005	037	0.29 (7.4)	0.51 (13.0)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
006	038	0.30 (7.6)	0.53 (13.5)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
007	039	0.31 (7.9)	0.54 (13.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
008	040	0.37 (9.4)	0.57 (14.5)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
009	041	0.40 (10.2)	0.60 (15.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
010	042	0.44 (11.2)	0.62 (15.8)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
011	043	0.50 (13.0)	0.69 (17.5)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
012	044	0.57 (14.5)	0.75 (19.1)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
013	045	0.64 (16.3)	0.82 (20.8)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
014	046	0.69 (17.5)	0.88 (22.4)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
015	047	0.82 (20.8)	1.00 (25.4)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.0)
016	048	0.94 (23.9)	1.13 (28.6)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.0)
017	049	1.07 (27.2)	1.25 (31.8)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.0)
018		0.35 (8.9)	0.44 (11.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
019		0.35 (8.9)	0.44 (11.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
020	050	0.35 (8.9)	0.44 (11.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
021	051	0.35 (8.9)	0.44 (11.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
022	052	0.29 (7.4)	0.39 (10.0)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
023	053	0.30 (7.6)	0.53 (13.5)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
024	054	0.31 (7.9)	0.54 (13.7)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
025	055	0.38 (9.7)	0.57 (14.5)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
026	056	0.41 (10.4)	0.60 (15.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
027	057	0.46 (11.7)	0.62 (15.8)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
028	058	0.51 (13.0)	0.72 (18.2)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
029	059	0.57 (14.5)	0.78 (19.8)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
030	060	0.64 (16.3)	0.85 (21.6)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
031	061	0.70 (17.8)	0.91 (23.0)	0.17 (4.3)	0.23 (5.8)	0.30 (7.6)	0.12 (3.0)
032	062	0.84 (21.3)	1.03 (26.2)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.0)
033	063	0.98 (24.9)	1.18 (30.0)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.0)
034	064	1.12 (28.4)	1.32 (33.5)	0.37 (9.4)	0.43 (10.9)	0.30 (7.6)	0.12 (3.0)

NOTES:
1. Millimeters are in parenthesis.
2. Dash numbers 001 to 010, 028 to 034, and 058 to 064 are kinked leads, and 011 to 027, and 043 to 057, are straight leads.

FIGURE 1. Case dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Rating and characteristics.

CID dash number				Hold current (amps)	Trip current (amps)	Power dissipation (watt)	Resistance (ohms) (min)	(max)	Post trip resistance (ohms)
001	018			0.10	0.20	0.38	2.50	4.50	7.50
002	019			0.17	0.34	0.48	3.30	5.21	8.00
003	020	035	050	0.20	0.40	0.41	1.83	2.75	4.40
004	021	036	051	0.25	0.50	0.45	1.25	1.95	3.00
005	022	037	052	0.30	0.60	0.49	0.88	1.33	2.10
006	023	038	053	0.40	0.80	0.56	0.55	0.86	1.29
007	024	039	054	0.50	1.00	0.77	0.50	0.77	1.17
008	025	040	055	0.65	1.30	0.88	0.31	0.48	0.72
009	026	041	056	0.75	1.50	0.92	0.25	0.40	0.60
010	027	042	057	0.90	1.80	0.99	0.20	0.31	0.47
011	028	043	058	1.10	2.20	1.50	0.15	0.25	0.38
012	029	044	059	1.35	2.70	1.70	0.12	0.19	0.30
013	030	045	060	1.60	3.20	1.90	0.09	0.14	0.22
014	031	046	061	1.85	3.70	2.10	0.08	0.12	0.19
015	032	047	062	2.50	5.00	2.50	0.05	0.08	0.13
016	033	048	063	3.00	6.00	2.80	0.04	0.06	0.10
017	034	049	064	3.75	7.50	3.20	0.03	0.05	0.08

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these resistors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source of documents.

Commercial Item Description

A-A-59714 - Resistors, Thermal, Non-Linear Thermistor, (Resettable Fuses), General Requirements for.

(Copies of federal specifications and standards are available from the Document Automation and Production Service, Building 4D, (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Ordering data. Ordering data is as specified in A-A-59714.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

TABLE II. Commercial products.

CID PIN	MFR's CAGE	MFR's name and address
AA5971402-***	06090	Tyco Electronics/Raychem Circuit Protection 308 Constitution Drive M/S R21 2A Menlo Park, CA 94025
AA5971402-***	32997	Bourns, Incorporated Circuit Protection Division 1200 Columbia Avenue Riverside, CA 92507-2114
AA5971402-***	0JR59	Wickmann USA, Inc. 4100 Shirley Drive SW Atlanta, GA 30336

Part number (P/N) supersession data. This CID supersedes the following manufacturers P/N as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE III. P/N supersession data.

CID dash number AA5971402-	MFR's CAGE	MFR's P/N 1/	CID dash number AA5971402-	MFR's CAGE	MFR's P/N 1/
001		RXE010	018		RXE010S
002		RXE017	019		RXE017S
003		RXE020	020		RXE020S
004		RXE025	021		RXE025S
005		RXE030	022		RXE030S
006		RXE040	023		RXE040S
007		RXE050	024		RXE050S
008		RXE065	025		RXE065S
009		RXE075	026		RXE075S
010		RXE090	027		RXE090S
011		RXE110	028		RXE110K
012		RXE135	029		RXE135K
013		RXE160	030		RXE160K
014		RXE185	031		RXE185K
015		RXE250	032		RXE250K
016		RXE300	033		RXE300K
017	035	RXE375	034	050	RXE375K
001		MF-R010	018		MF-R010-2-14
002		MF-R017	019		MF-R017-2-14
035		MF-R020	050		MF-R020-2-14
036		MF-R025	051		MF-R025-2-14
037		MF-R030	052		MF-R030-2-14
038		MF-R040	053		MF-R040-2-14
039		MF-R050	054		MF-R050-2-14
040		MF-R065	055		MF-R065-2-14
041		MF-R075	056		MF-R075-2-14
042		MF-R090	057		MF-R090-2-14
043		MF-RX110-2-17	058		MF-RX110
044		MF-RX135-2-17	059		MF-RX135
045		MF-RX160-2-17	060		MF-RX160
046		MF-RX185-2-17	061		MF-RX185
047		MF-RX250-2-17	062		MF-RX250
048		MF-RX300-2-17	063		MF-RX300
049	32997	MF-RX375-2-17	064	32997	MF-RX375
001		RLD60P010X	058		RLD60P110X
002		RLD60P017X	059		RLD60P135X
035		RLD60P020X	060		RLD60P160X
036		RLD60P025X	061		RLD60P185X
037		RLD60P030X	062		RLD60P250X
038		RLD60P040X	063		RLD60P300X
039		RLD60P050X	064		RLD60P375X
040		RLD60P065X			
041		RLD60P075X			
042	0JR59	RLD60P090X		0JR59	

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Government users. To acquire information on obtaining these resistors from the Government inventory system, Defense Supply Center, Columbus, ATTN: DSCC-CPB, Post Office Box 3990, Columbus, OH 43216-5000, or telephone (614) 692-7678.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:

DLA - CC

Project 5905-1692-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.