[INCH-POUND]
A-A-59714/2B
5 October 2020
SUPERSEDING
A-A-59714/2A
14 July 2003

# COMMERCIAL ITEM DESCRIPTION
# SPECIFICATION SHEET

## RESISTOR, THERMAL, NON-LINEAR THERMISTOR
## (RESETTABLE FUSE)
## RADIAL LEADED, STYLE RXE

* The General Services Administration has authorized the use of this Commercial Item Description for all federal agencies.

* The complete requirements for procuring fixed wirewound power type resistor described herein shall consist of this document and the issue in effect of A-A-59714.

* CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

| AA59714 | 02 | -001 |
|---|---|---|
| CID number | Applicable CID sheet (two digits) | Dash number (see applicable CID sheet) |

SALIENT CHARACTERISTICS

* Interface and physical dimensions. The resistors supplied to this CID specification sheet shall be as specified herein (see figure 1).

Power dissipation. The power dissipation shall be as specified in table I.

Voltage rating. The voltage rating shall be 60 V (max) for dash numbers 001, 002, 018, 019, and 035 thru 064; and 72V (max) for dash numbers 003 thru 017, and 020 thru 034.

Hold current. The hold current shall be as specified in table I.

Trip current. The trip current shall be as specified in table I.

Resistance. The maximum and minimum resistance shall be as specified in table I.


Post trip resistance. The post trip resistance shall be as specified in table I.

Operating ambient temperature. The operating ambient temperature range shall be -40°C to +85°C.

* Marking. Thermistors supplied to this CID specification sheet shall be marked as specified in A-A-59714.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

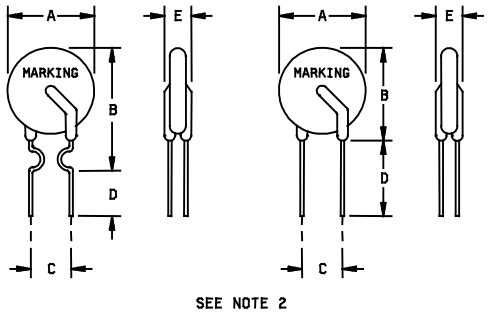


| Dash number | | Dimensions | | | | | |
|---|---|---|---|---|---|---|---|
| | | A (max) | B (max) | C (min) | C (max) | D (min) | E (max) |
| 001 | | 0.29 (7.4) | 0.50 (12.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 002 | | 0.29 (7.4) | 0.50 (12.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 003 | 035 | 0.29 (7.4) | 0.50 (12.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 004 | 036 | 0.29 (7.4) | 0.50 (12.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 005 | 037 | 0.29 (7.4) | 0.53 (13.4) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 006 | 038 | 0.30 (7.6) | 0.54 (13.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 007 | 039 | 0.31 (7.9) | 0.54 (15.2) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 008 | 040 | 0.38 (9.7) | 0.60 (15.2) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 009 | 041 | 0.41 (10.4) | 0.63 (16.0) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 010 | 042 | 0.46 (11.7) | 0.66 (16.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 011 | 043 | 0.50 (13.0) | 0.69 (17.5) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 012 | 044 | 0.57 (14.5) | 0.75 (19.1) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 013 | 045 | 0.64 (16.3) | 0.82 (20.8) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 014 | 046 | 0.69 (17.5) | 0.88 (22.4) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 015 | 047 | 0.82 (20.8) | 1.00 (25.4) | 0.37 (9.4) | 0.43 (10.9) | 0.30 (7.6) | 0.12 (3.0) |
| 016 | 048 | 0.94 (23.9) | 1.13 (28.6) | 0.37 (9.4) | 0.43 (10.9) | 0.30 (7.6) | 0.12 (3.0) |
| 017 | 049 | 1.07 (27.2) | 1.25 (31.8) | 0.37 (9.4) | 0.43 (10.9) | 0.30 (7.6) | 0.12 (3.0) |
| 018 | | 0.35 (8.9) | 0.50 (12.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 019 | | 0.35 (8.9) | 0.50 (12.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 020 | 050 | 0.35 (8.9) | 0.50 (12.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 021 | 051 | 0.35 (8.9) | 0.50 (12.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 022 | 052 | 0.29 (7.4) | 0.53 (13.4) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 023 | 053 | 0.30 (7.6) | 0.54 (13.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 024 | 054 | 0.31 (7.9) | 0.54 (13.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 025 | 055 | 0.38 (9.7) | 0.60 (15.2) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 026 | 056 | 0.41 (10.4) | 0.63 (16.0) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 027 | 057 | 0.46 (11.7) | 0.66 (16.7) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 028 | 058 | 0.51 (13.0) | 0.72 (18.2) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 029 | 059 | 0.57 (14.5) | 0.78 (19.8) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 030 | 060 | 0.64 (16.3) | 0.85 (21.6) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 031 | 061 | 0.70 (17.8) | 0.91 (23.0) | 0.17 (4.3) | 0.23 (5.8) | 0.30 (7.6) | 0.12 (3.0) |
| 032 | 062 | 0.84 (21.3) | 1.03 (26.2) | 0.37 (9.4) | 0.43 (10.9) | 0.30 (7.6) | 0.12 (3.0) |
| 033 | 063 | 0.98 (24.9) | 1.18 (30.0) | 0.37 (9.4) | 0.43 (10.9) | 0.30 (7.6) | 0.12 (3.0) |
| 034 | 064 | 1.12 (28.4) | 1.32 (33.5) | 0.37 (9.4) | 0.43 (10.9) | 0.30 (7.6) | 0.12 (3.0) |

NOTES:
1. Millimeters are in parenthesis.
2. Dash numbers 001 to 010, 028 to 034, and 058 to 064 are kinked leads, and 011 to 027, and 043 to 057, are straight leads.

FIGURE 1. Case dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Rating and characteristics.

| CID dash number | | | | Hold current (amps) | Trip current (amps) | Power dissipation (watt) | Resistance (ohms) (min) | (max) | Post trip resistance (ohms) |
|---|---|---|---|---|---|---|---|---|---|
| 001 | 018 | | | 0.10 | 0.20 | 0.38 | 2.50 | 4.50 | 7.50 |
| 002 | 019 | | | 0.17 | 0.34 | 0.48 | 2.00 | 5.21 | 8.00 |
| 003 | 020 | 035 | 050 | 0.20 | 0.40 | 0.40 | 1.50 | 2.84 | 4.40 |
| 004 | 021 | 036 | 051 | 0.25 | 0.50 | 0.45 | 1.00 | 1.95 | 3.00 |
| 005 | 022 | 037 | 052 | 0.30 | 0.60 | 0.49 | 0.76 | 1.36 | 2.10 |
| 006 | 023 | 038 | 053 | 0.40 | 0.80 | 0.55 | 0.52 | 0.86 | 1.29 |
| 007 | 024 | 039 | 054 | 0.50 | 1.00 | 0.75 | 0.41 | 0.77 | 1.17 |
| 008 | 025 | 040 | 055 | 0.65 | 1.30 | 0.88 | 0.27 | 0.48 | 0.72 |
| 009 | 026 | 041 | 056 | 0.75 | 1.50 | 0.90 | 0.18 | 0.40 | 0.60 |
| 010 | 027 | 042 | 057 | 0.90 | 1.80 | 0.99 | 0.14 | 0.31 | 0.47 |
| 011 | 028 | 043 | 058 | 1.10 | 2.20 | 1.50 | 0.15 | 0.25 | 0.38 |
| 012 | 029 | 044 | 059 | 1.35 | 2.70 | 1.70 | 0.12 | 0.19 | 0.30 |
| 013 | 030 | 045 | 060 | 1.60 | 3.20 | 1.90 | 0.09 | 0.14 | 0.22 |
| 014 | 031 | 046 | 061 | 1.85 | 3.70 | 2.10 | 0.08 | 0.12 | 0.19 |
| 015 | 032 | 047 | 062 | 2.50 | 5.00 | 2.50 | 0.05 | 0.08 | 0.13 |
| 016 | 033 | 048 | 063 | 3.00 | 6.00 | 2.80 | 0.04 | 0.06 | 0.10 |
| 017 | 034 | 049 | 064 | 3.75 | 7.50 | 3.20 | 0.03 | 0.05 | 0.08 |

NOTES.

* PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Source of documents.

Commercial Item Description

A-A-59714 - Resistor, Thermal, Non-Linear Thermistor, (Resettable Fuses), General Requirements for.

* (Copies of these documents are available online at https://quicksearch.dla.mil/.)

* Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

*

| MFR's CAGE | MFR's name and address |
|---|---|
| 75915 | Littelfuse<br>8755 West Higgins Road<br>Chicago, IL 60631<br>Ph: 773-628-1000<br>Website: www.Littelfuse.com |
| 32997 | Bourns, Incorporated<br>Circuit Protection Division<br>1200 Columbia Avenue<br>Riverside, CA 92507-2114<br>Phone: 951-781-5500 Ext. 2778<br>Email: americus@bourns.com<br>Website: http://www.bourns.com |

* Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturers P/N as shown in table II. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

* TABLE II. P/N supersession data.

| CID dash number AA5971402- | | MFR's CAGE | MFR's P/N 1/ | | CID dash number AA5971402- | | MFR's CAGE | MFR's P/N 1/ |
|---|---|---|---|---|---|---|---|---|
| 001 | | | RXEF010 | | 018 | | | RXEF010S |
| 002 | | | RXEF017 | | 019 | | | RXEF017S |
| 003 | 035 | | RXEF020 | | 020 | 050 | | RXEF020S |
| 004 | 036 | | RXEF025 | | 021 | 051 | | |
| 005 | 037 | | RXEF030 | | 022 | 052 | | RXEF030S |
| 006 | 038 | | RXEF040 | | 023 | 053 | | RXEF040S |
| 007 | 039 | | RXEF050 | | 024 | 054 | | RXEF050S |
| 008 | 040 | 75915 | RXEF065 | | 025 | 055 | 75915 | RXEF065S |
| 009 | 041 | | RXEF075 | | 026 | 056 | | RXEF075S |
| 010 | 042 | | RXEF090 | | 027 | 057 | | RXEF090S |
| 011 | 043 | | RXEF110 | | 028 | 058 | | RXEF110K |
| 012 | 044 | | RXEF135 | | 029 | 059 | | RXEF135K |
| 013 | 045 | | RXEF160 | | 030 | 060 | | RXEF160K |
| 014 | 046 | | RXEF185 | | 031 | 061 | | RXEF185K |
| 015 | 047 | | RXEF250 | | 032 | 062 | | RXEF250K |
| 016 | 048 | | RXEF300 | | 033 | 063 | | RXEF300K |
| 017 | 049 | | RXEF375 | | 034 | 064 | | RXEF375K |
| 001 | | | MF-R010 | | 018 | | | MF-R010-2-17 |
| 002 | | | MF-R017 | | 019 | | | MF-R017-2-17 |
| 035 | | | MF-R020 | | 050 | | | MF-R020-2-17 |
| 036 | | | MF-R025 | | 051 | | | MF-R025-2-17 |
| 037 | | | MF-R030 | | 052 | | | MF-R030-2-17 |
| 038 | | | MF-R040 | | 053 | | | MF-R040-2-17 |
| 039 | | | MF-R050 | | 054 | | | MF-R050-2-17 |
| 040 | | | MF-R065 | | 055 | | | MF-R065-2-17 |
| 041 | | 32997 | MF-R075 | | 056 | | 32997 | MF-R075-2-17 |
| 042 | | | MF-R090 | | 057 | | | MF-R090-2-17 |
| 043 | | | MF-RX110/72 | | 058 | | | MF-RX110/72-2-14 |
| 044 | | | MF-RX135/72 | | 059 | | | MF-RX135/72-2-14 |
| 045 | | | MF-RX160/72 | | 060 | | | MF-RX160/72-2-14 |
| 046 | | | MF-RX185/72 | | 061 | | | MF-RX185/72-2-14 |
| 047 | | | MF-RX250/72 | | 062 | | | MF-RX250/72-2-14 |
| 048 | | | MF-RX300/72 | | 063 | | | MF-RX300/72-2-14 |
| 049 | | | MF-RX375/72 | | 064 | | | MF-RX375/72-2-14 |

* 1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID specification sheet, At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see paragraph 3.7 of A-A-59714.

* National Stock Number. This section is not applicable to this CID specification sheet.

* Changes from previous issue. The margins of this CID specification sheet are marked with an asterisk to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing activity:

DLA - CC

Project 5905-2020-025

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.