[INCH-POUND]
A-A-59715/5A
21 December 2015
SUPERSEDING
A-A-59715/2
10 June 2002

COMMERICAL ITEM DESCRIPTION

RESISTOR, FIXED AND ADJUSTABLE, WIREWOUND,POWER TYPE

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

The complete requirements for procuring fixed wirewound power type resistor described herein shall consist of this document and the issue in effect of CID A-A-59715.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59715	05	-	*	****	*
CID number	Applicable CID sheet (two digits)		Resistor type (one digit) (see 3.2)	Resistance (see 3.3)	Resistance tolerance (see 3.4)

SALIENT CHARTACTERISTICS.

Interface and physical dimensions. The resistors supplied to this CID shall meet the interface and physical dimensions as specified herein (see figure 1).

Resistor type. Designates the type and power rating of each resistor (see table 1).

Table 1 Resistor type.

Designation	Wattage ($25^{O}C$)	Designation	Wattage ($25^{O}C$)
A	35	L	220
B	90	M	270
C	100	N	300
D	110	P 1/	300
E	135	R	375
F	150	S	500
G	160	T	750
H	180	U	1000
J	190	V	1500
K	215		


1/ Adjustable type

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990, or emailed to resistor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A

FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

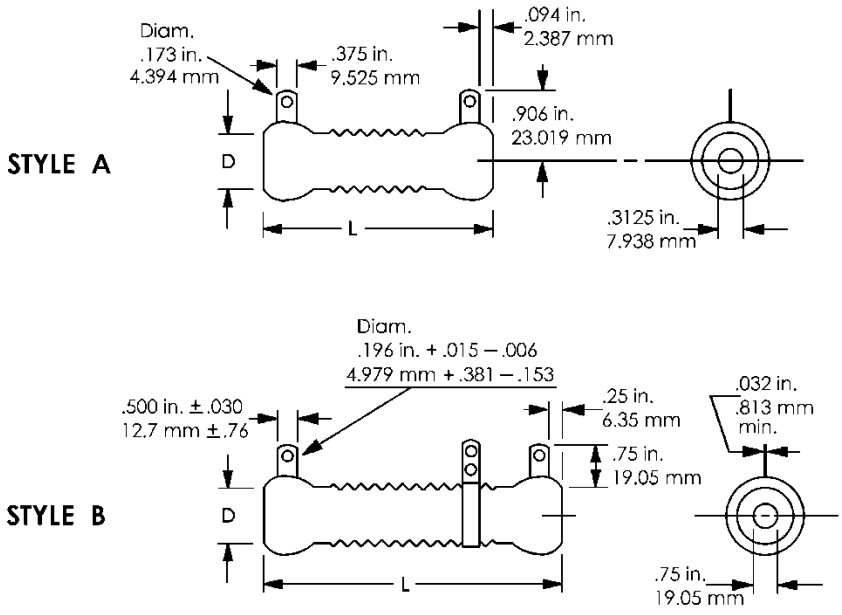

Designation	Style	Dimensions		Designation	Style	Dimensions	
		D	L			D	L
A	A	0.563	2.000	L	A	1.125	6.000
B	A	0.563	4.000	M	A	1.500	5.000
C	A	0.750	3.500	N 1/	B	1.125	8.500
D	A	0.563	5.000	P 1/ 2/	B	1.125	8.500
E	A	0.563	6.000	R	A	1.125	10.500
F	A	1.000	5.000	S	A	1.625	10.500
G	A	0.750	6.000	T	A	2.500	12.000
H	A	0.750	6.500	U	A	2.500	15.000
J	A	1.000	6.000	V	A	2.500	20.000
K	A	1.000	7.000				

1/ For values over 16 ohms, terminal dimensions are the same as style A.
2/ Adjustable type

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.563	14.30	1.500	38.10	3.500	88.90	6.500	165.10	12.000	304.80
0.750	19.05	1.625	41.28	4.000	101.60	7.000	177.80	15.000	381.00
1.000	25.40	2.000	50.80	5.000	127.00	8.500	215.90	20.000	508.00
1.125	28.58	2.500	63.50	6.000	152.40	10.500	266.70		

NOTES:
1. Dimensions are in Inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Resistor, Fixed and Adjustable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Resistance. The nominal resistance value expressed in ohms is identified by a four-digit number; the first three digits represent significant figures and the last digit specifies the number of zeros to follow. Resistance values for specific resistors are covered in the individual CID sheets. When the value of resistance is less than 100 ohms, or when fractional values of an ohm is required, the "R" will be substituted for one of the significant digits to represent the decimal point. When the letter "R" is used, succeeding digits of the group represent significant figures. The resistance value designations are shown in table II below.

Table II Designation of resistance values.

Designation				Resistance (in ohms)			
R100	to	R999	incl	0.1	to	0.999	incl.
1R00	to	9R99	incl.	1.0	to	9.99	incl.
10R0	to	99R9	incl.	10.0	to	99.9	incl.
1000	to	9990	incl.	100	to	999	incl.

Resistance tolerance. The resistance tolerance available is K (±10 percent).

Power rating. The power rating shall be specified in table I, at 25°C, derated to zero at 4000°C

Temperature coefficient of resistance (TCR). The temperature coefficient of resistance (TCR) is as follows:

Resistance	TCR (ppm/°C)
All Values	±400

Marking. Resistors supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN.

REGULATORY REQUIREMENTS. This section is not applicable to this CID sheet.

PRODUCT CONFORMANCE PROVISIONS. Product conformance provisions shall be as specified in A-A-59715.

PACKAGING. Packaging shall be as specified in A-A-59715.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See CLASSIFICATION for PIN format example.

Source of documents.

COMMERCIAL ITEM DESCRIPTION

A-A-59715	-	Resistors, Fixed and Adjustable, Wire Wound, Power Type, General Requirement for.

(Copies of these documents are available online at http://quicksearch.dla.mil).

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of the CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

MFR's CAGE	MFR's name and address
44655	Ohmite Manufacturing Company 85 W. Algonquin Rd Suite 230 Arlington Heights, IL 60005 Phone: (866) 9-OHMITE Fax: (847) 574-7522 Email: sales@ohmite.com Website: http://www.ohmite.com/ Plant: Baja Oriente Calle 8 Esquina Calle Cuarta, S/N Parque Industiial Fondeport el Sauzal Ensenada, Baja California, Mexico, 22760

Part number (P/N) supersession data. This CID supersedes the following MFR's P/N as shown. This information is being provided to assist in reducing proliferation in the Government inventory system. (see Table III)

TABLE III. P/N supersession data.

MFR's CAGE	Designation	MFR's style 1/	MFR's CAGE	Designation	MFR's style 1/
44655	A	C35K-***	44655	L	C220K-***
	B	C90K-***		M	C270K-***
	C	C100K-***		N	C300K-***
	D	C110K-***		P	E300K-***
	E	C135K-***		R	C375K-***
	F	C150K-***		S	C500K-***
	G	C160K-***		T	C750K-***
	H	C180K-***		U	C1000K-***
	J	C190K-***		V	C1500K-***
	K	C215K-***			

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see paragraph 3.7 of A-A-59715.

Government users. To acquire information on obtaining these fuses from the Government inventory system, contact DLA Land and Maritime, ATTN: DLA Land and Maritime-FMX, P.O. Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-3677.

National Stock Number. This section is not applicable to this CID specification sheet.

Changes from previous issue. Marginal notations are used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
NAVY - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:
DLA - CC

Project 5905-2016-013

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.