[INCH-POUND]
A-A-59717/1A
January 17, 2007
SUPERSEDING
A-A-59717/1
April 12, 2002

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

FUSEHOLDER, BLOCK, PC BOARD MOUNT, HORIZONTAL MOUNT, ACCOMODATES .25 INCH X 1.25 INCHES OR 5 MM X 20 MM FUSES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the fuseholder block described herein shall consist of this document and the issue in effect of A-A-59717.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59717	/01	-	001
CID number	Applicable CID specification sheet (two digits)		Dash number

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuseholder blocks supplied to this CID shall be as specified herein (see figure 1).

Ampere rating. The ampere rating shall be 10 amperes minimum.

Voltage rating. The voltage rating shall be 250 V ac maximum.

Insulation resistance. The insulation resistance shall be 10,000 megohm at 500 V dc.

Contact resistance. The contact resistance shall be less than 0.005 ohms at 20 mV.

Dielectric strength. The dielectric strength shall be over 200 volts/mil.

Operating temperature range. The maximum operating temperature range shall be -40°F to 185°F (-40°C to +85°C).

Fuse carrier knob. The fuse carrier and knob shall be a spring-loaded, bayonet type able to accommodate the fuse size as specified in table I. Tin plated brass. Screwdriver slotted.

Fuseholder molded material. This fuseholder block shall be of a high dielectric molded phenolic material with a UL 94 VO flammability rating.

Fuse accommodation. This fuseholder block accepts either .25 inch. X 1.25 inches or 5 mm X 20 mm fuses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

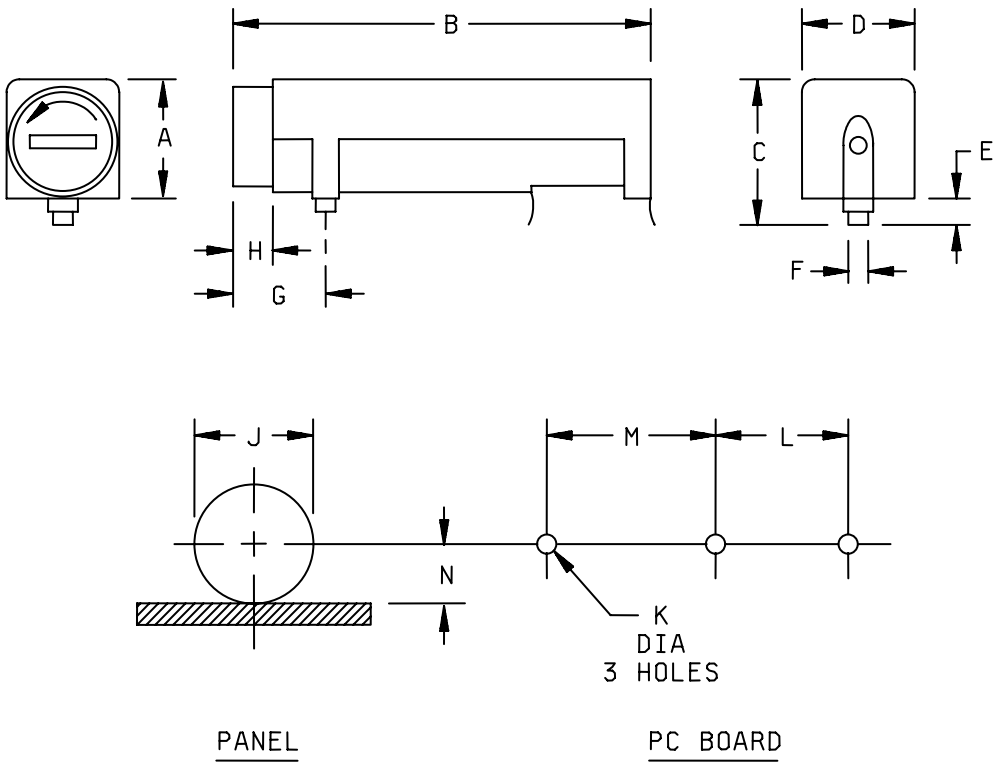

FIGURE 1. Interface and physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Dimensions				
Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	.432	.442	10.97	11.23
B	1.72	1.82	43.69	46.23
C	.475	.485	12.06	12.32
D	.485	.495	12.32	12.57
E	.135	.145	3.43	3.68
F	.035	.045	0.89	1.14
G	.239	.249	6.07	6.32
H	.192	.202	4.88	5.13
J	.464	.474	11.79	12.04
K	.045	.055	1.14	1.40
L	.595	.605	15.11	15.37
M	.695	.705	17.65	17.91
N	.245	.255	6.22	6.48

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for general information only.

FIGURE 1. Interface and physical dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

CID dash number AA59717/01-	Fuse size accommodation
001	.25 inch X 1.25 inch
002	5 mm X 20 mm

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Other Publications

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 94 - Test for Flammability of Plastic Materials for Parts in Devices and Appliances.

(Copies of this document are available online at http://www.ul.com/ or from the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
71400	Cooper Bussmann, Incorporated P. O. Box 14460 St. Louis, MO 63178-4460 Phone number (636) 394-2877 Facsimile number (800) 544-2570 E-mail: mailto:fusebox@buss.com Uniform Resource Locator (URL): http://www.bussmann.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I)	MFR's CAGE	MFR's P/N 1/
AA59717/01-		
001	71400	HBH-I
002	71400	HBH-M

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph of A-A-59717.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2007-002

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.