[METRIC]
A-A-59718/2A
February 22, 2007
SUPERSEDING
A-A-59718/2
May 15, 2002

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

FUSE, INCLOSED LINK, BOLT-ON

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the issue in effect of A-A-59718.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59718	/02	-	001
CID number	Applicable CID specification sheet (two digits)		Dash number

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Fuses supplied to this CID specification sheet shall be as specified herein (see figure 1).

Ampere rating. The ampere rating shall be as specified in table I.


Voltage rating. The voltage rating shall be 32 volts dc.

Opening time characteristics. Opening time characteristics shall be as specified in table II.

TABLE I. Characteristics.

CID dash number AA59718/02-	Current rating (A)	Nom. cold resistance (mΩ)	Typical voltage drop at rated current (mV)
001	80	0.72	87
002	100	0.55	87
003	125	0.43	80
004	150	0.35	92
005	175	0.27	86
006	200	0.26	83
007	225	0.23	82
008	250	0.19	82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

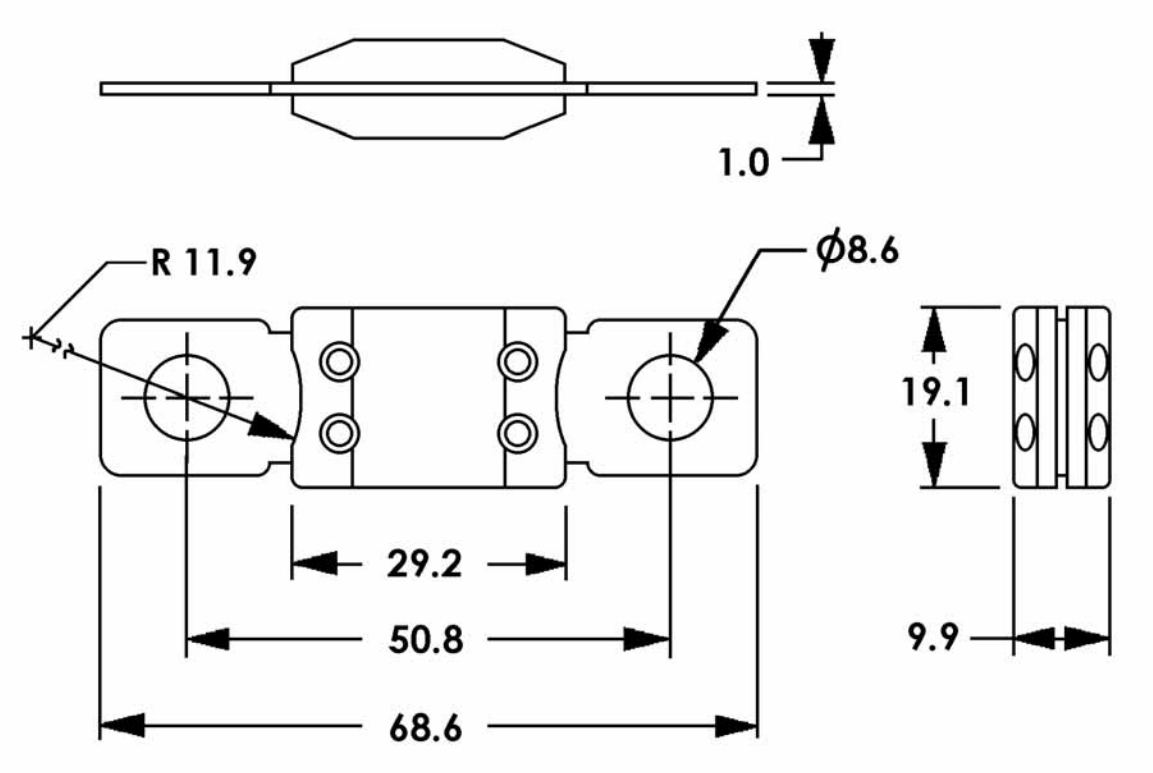

mm	Inches
1.0	.04
8.8	.35
9.9	.39
11.9	.47
19.1	.75
29.2	1.15
50.8	2.00
68.6	2.70

NOTES:

1. Dimensions are in millimeters.
2. Tolerance is ± .005 inch (±0.13 mm), unless otherwise specified.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

TABLE II. Opening time characteristics.

Percent of rating	Opening time	
	Minimum	Maximum
100	4 hours	N/A
135	120 seconds	1,800 seconds
200	1 seconds	15 seconds
350	0.3 seconds	5 seconds
600	0.1 second	1 second

Ambient temperature. The ambient temperature shall be -40°C to +125°C.

Interrupting rating. The interrupting rating shall be 2,000 amperes (A) at 32 volts dc.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification section for PIN format example.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
75915	Littelfuse Incorporated 800 E. Northwest Highway Des Plaines, IL 60016-3096 Phone number (847) 824-1188 Facsimile number (847) 391-0894 E-mail: mailto:electronics@littelfuse.com Uniform Resource Locator (URL): http://www.littelfuse.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the government inventory system.

TABLE II. P/N supersession data.

CID dash number (see table I)	Vendor commercial P/N 1/	
AA59718/02-	MFR's CAGE	MFR's P/N 1/
001	75915	298080
002	75915	298100
003	75915	298125
004	75915	298150
005	75915	298175
006	75915	298200
007	75915	298225
008	75915	298250

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements, see A-A-59718.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5920-2007-010

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.