INCH – POUNDS

A-A-59732B
14 December 2004
SUPERCEDING
A-A-59732A
14 May 2003

COMMERCIAL ITEM DESCRIPTION

SCALE, VEHICLE PLATFORM

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

1. SCOPE.

1.1 Scope. This CID covers a rugged, environmentally protected, commercial type, vehicle platform scale set with a single scale capacity of 20,000 pounds and a nominal inaccuracy of +/- 1 percent of applied load. These scales are used as a set to weigh wheeled military vehicles and cargo in remote areas, on unimproved and improved surfaces as well as satisfactorily operating in all environmental conditions. Their purpose is to maximize flight safety and aircraft utilization at main operating bases, forward operating bases, landing zones, and under bare base operations.

2. CLASSIFICATION

2.1 Configuration. The weighing systems shall be of the following configuration:

Type I: 2 – 20k (2 – vehicle platform scales, 20,000 lb. capacity each, total capacity 40,000 lb)
Type II: 4 – 20k (4 – vehicle platform scales, 20,000 lb. capacity each, total capacity 80,000 lb)
Type III: 6 – 20k (6 – vehicle platform scales, 20,000 lb. capacity each, total capacity 120,000 lb)
Type IV: 10 – 20k (10 – vehicle platform scales, 20,000 lb. capacity each, total capacity 200,000 lb)
Type V: 12 – 20k (12 – vehicle platform scales, 20,000 lb. capacity each, total capacity 240,000 lb)
Type VI: 16 – 20k (16 – vehicle platform scales, 20,000 lb. capacity each, total capacity 320,000 lb)
Type VII: 24 – 20k (24 – vehicle platform scales, 20,000 lb. capacity each, total capacity 480,000 lb)

Comments, suggestions, or questions on this document should be addressed to WR-ALC/LEEC, 295 Byron St., Warner Robins AFB, GA 31098-1611. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

2.2 Part or Identifying Number (PIN). The following part or identifying numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

Example of reference part number:

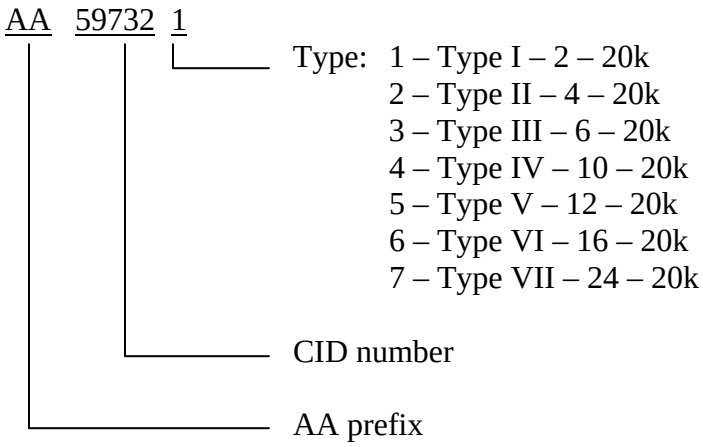

PIN AA-59732-1 would identify a Type I Vehicle Platform Scale Set with 2 scales with a total capacity of 40,000 lb.

3. SALIENT CHARACTERISTICS.

3.1 Design. The scales shall be fully electronic type load cells. The weighing sets shall be easy to use, maintain, and locally repair. The scales shall be durable, reliable, and free of defects which effects performance, strength, and safety. The set(s) offered shall be a complete set, including all items required to weigh military vehicles and cargo.

3.1.1 The scale shall be NTEP Class IV (or equivalent), certified to 400 divisions, Certified by the U.S. National Institute of Standards and Technologies (Ref. 2001 NIST Handbook 44).

3.2 Configuration. The scale shall be large enough to accommodate military vehicle wheels without requiring additional base supports when placed on unimproved ground of average density.

3.2.1 The scale shall have organic ramps which are a structural part of the unit.

3.2.2 The scale shall have a machined anti-skid base and top.

3.2.3 A fixed carrying handle shall be located on one side of the scale. The handle shall be easily repaired and/or replaced when damaged or broken.

3.2.4 The scale shall have a weight indicating digital display.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

3.2.5 When multiple scales from the same manufacturer are electronically interconnected together the last scale in series shall be capable of displaying the total weight of the vehicle being weighed.

3.2.6 Each scale shall be also capable of displaying the individual axle weight.

3.2.7 No portion of the scale shall sustain any damage when run over by a vehicle.

3.2.8 The following dimensions are required to properly weigh vehicles in the military inventory.

3.2.8.1 Weighing surface area shall be a minimum of 110 square inches.

3.2.8.2 Overall dimensions shall be kept to a minimum as to not effect the weighing of the vehicle or cause any interference between the tires of the vehicle as well as to keep the overall weight of the scale to a minimum.

3.3 Power. The scale shall be powered by commercially available (either direct from the scale supplier or from a source other than the scale supplier) alkaline batteries and/or rechargeable NiCAD and/or rechargeable NiMhi batteries.

3.3.1 Batteries shall be capable providing power for a minimum of eight (8) hours of continued use without recharging.

3.3.2 Recharging capabilities must be supplied to operate from a twelve (12) volt DC system. The scale shall be designed and manufactured to accomplish recharging of batteries without removing batteries from the scale.

3.4 Performance. The scale shall have a performance range of 0 to 20,000 pounds.

3.4.1 The indicated weight shall be repeatable with the indicating weight inaccuracy not exceeding +/-1 percent of the applied load, throughout the range, or +/-50 pounds, whichever is greater.

3.5 Overload. The scale shall be capable of withstanding 1.5 times the rated capacity, or 30,000 lbs., without sustaining structural damage or permanent degradation of performance.

3.6 Weight Indicating. The scale shall contain a weight indicating digital display at least 0.5 inches in height with a back light to improve visibility.

3.6.1 The scale indicator shall be graduated to 10 lb. increments.

3.6.2 The scale shall be supplied with individual push button controls on the keyboard for:

3.6.2.1 Zero.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

3.6.2.2 Peak hold. The peak hold mode shall indicate the maximum applied load.

3.6.2.3 Local/total mode.

3.7 Overall Weight. Each scale weight shall not exceed 50 pounds.

3.7.1 The actual weight shall be marked on each scale for scales that weigh over 25 pounds.

3.8 Tilted Position. The scale shall be accurate when operated up to and including 5 percent (approximately three degrees) out of level.

3.9 Storage/Carrying Case(s). The scale sets shall be contained in a durable storage/carrying case(s). The case(s) shall be capable of housing all components (scales, cables, manuals, etc.) of the scale set in separate compartments. The case(s) shall be supplied with carrying handles for easy transporting the scales.

3.9.1 For all cases that the total weight exceeds 25 pounds, the actual weight shall be clearly marked on each case.

3.10 Environmental Conditions.

3.10.1 Operating Temperature. The scale operating temperature shall be in accordance with the applicable NTEP certification.

3.10.2 Water. The operation of the scale shall not be affected by the presence of water.

3.10.3 Dust. The operation of the scale shall not be affected by the presence of dust.

3.10.4 Dirt. The operation of the scale shall not be affected by the presence of dirt.

3.10.5 Sand. The operation of the scale shall not be affected by the presence of sand.

3.11 Corrosion Control. The scale shall be constructed of corrosion resistant materials and shall be suitable protected against corrosion.

3.12 Repair and Calibration. The scale shall be designed so that minor repair and calibration can be performed at the field level.

3.12.1 The manufacturer/offeror shall provide a certificate of calibration (C of C) with each scale and a sample (C of C) to the cognizant engineer as part of the data package submitted to the engineer prior to final approval.

3.13 Service Life. The scale shall be designed for a minimum service life of 8 years.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

3.14 Interchangeability (Optional Feature). The scales provided shall be supplied with a common/standard government connection plug, communication language, connector plug pin arrangement, etc. which allows for the scales to be interchangeable with scales being supplied from different manufacturers

4. REGULATORY REQUIREMENTS.

4.1 The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Market Acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this requirement. The Offerer/Contractor if requested by the Government shall supply proof of conforming to the sub-sections contained herein.

5.2. Product Conformance. The products provided shall conform to the manufacturer's own drawings, specifications, standards, and quality assurance practices and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance. Minor changes to the commercial product, with respect to ruggedizing and environmental suitability and protection shall be permitted, subject to the approval of the procurement office, to satisfy these requirements.

5.2.1 The Offeror/Contractor of the item shall have been producing a product meeting these requirements for at least 5 years.

5.2.2 The Offeror/Contractor of the item shall have sold at least 250 units meeting these requirements to the Government or the commercial market over the last five years.

5.3 Alternative offers. If an alternative/replacement item is offered which has not been approved by the Government, descriptive literature (commercial catalogs, specification sheets, etc.) shall be submitted with the quote for a complete system, for review and evaluation by the cognizant engineer who will coordinate qualifying the instrument with the end user, or applicable system program office. If the instrument has not been purchased previously by the Government and meets the evaluation process, the instrument shall be subjected to functional testing which includes a performance testing following the applicable technical orders prior to final approval by the Government at a location determined by the cognizant engineer.

5.4 Operation and Maintenance Manual. One copy of the commercial operation and maintenance manual, including top level illustrated parts breakdown and calibration procedures and adjustments shall be shipped with each unit. One additional copy (electronic copy in Adobe Acrobat® format is acceptable) of the operation and maintenance manual per contract order shall be supplied to the cognizant engineer at no additional cost to the Government. The address for the cognizant engineer is indicated in paragraph 5.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

5.5 Warranty. Each unit shall be supplied with the standard commercial warranty on parts and labor. Information of warranty duration and expiration date, conditions of the warranty and point of contact shall be shipped with each unit. One additional copy (electronic copy in Adobe Acrobat® format is acceptable) of the warranty information per contract shall be mailed to the cognizant engineer at no additional cost to the Government to this address: FSC 6670 Engineer, WR-ALC/LEEE, 295 Byron Street, Robins AFB, GA 31098-1611.

6. PACKAGING.

6.1 Packaging. The scale shall be packaged, marked per contract or purchase order instructions. Unless otherwise specified in the contract, the items shall be packaged according to normal commercial practice and packed to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipment, handling, and storage. Shipping containers shall be properly marked and in compliance with both national and uniform motor freight classifications.

7 NOTES.

INFORMATION FOR GUIDANCE ONLY. This section contains information of a general or explanatory nature that is helpful, but is not mandatory.

7.1 Source of Documents.

NIST Handbook 44 may be obtained online at http://www.nist.gov/ or from NIST Public Inquiries, NIST, 100 Bureau Drive, Stop 3460, Gaithersburg, MD 20899-3640.

MILITARY INTERESTS:

Custodians:
Army – GL
Coast Guard - CG
DLA – GS
Air Force – 99
Marines – MC

Review Activity:
Air Force – 71

Preparing Activity:
Air Force – 84

Agent:
Air Force – 99

(Project 6670-0226)

Note: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.