INCH-POUND
A-A-59732C
17 March 2006
A-A-59732B
14 December 2004

COMMERCIAL ITEM DESCRIPTION

SCALE, VEHICLE PLATFORM

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers a rugged, environmentally protected, commercial type, vehicle platform scale set with a single scale capacity of 20,000 pounds and a nominal inaccuracy of +/- 1 percent of applied load. These scales are used as a set to weigh wheeled military vehicles and cargo in remote areas, on unimproved and improved surfaces as well as satisfactorily operating in all environmental conditions. Their purpose is to maximize flight safety and aircraft utilization at main operating bases, forward operating bases, landing zones, and under bare base operations.

2. CLASSIFICATION. The vehicle platform scale set shall be of the following types as specified (see 7.3(b)):

Type I: 2 - 20k (2 - vehicle platform scales, 20,000 lb capacity each, total capacity 40,000 lbs)
Type II: 4 - 20k (4 - vehicle platform scales, 20,000 lb capacity each, total capacity 80,000 lbs)
Type III: 6 - 20k (6 - vehicle platform scales, 20,000 lb capacity each, total capacity 120,000 lbs)
Type IV: 10 - 20k (10 - vehicle platform scales, 20,000 lb capacity each, total capacity 200,000 lbs)
Type V: 12 - 20k (12 - vehicle platform scales, 20,000 lb capacity each, total capacity 240,000 lbs)
Type VI: 16 - 20k (16 - vehicle platform scales, 20,000 lb capacity each, total capacity 320,000 lbs)
Type VII: 24 - 20k (24 - vehicle platform scales, 20,000 lb capacity each, total capacity 480,000 lbs)
Type VIII: 1 - 20k (1 - vehicle platform scale, 20,000 lb capacity each, total capacity 20,000 lbs)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: WR-ALC/LEEC, 295 Byron St., Warner Robins AFB, GA 31098-1611.

AMSC N/A FSC 6670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Design. The scales shall be fully electronic type load cells. The weighing sets shall be easy to use, maintain, and locally repair. The scales shall be durable, reliable, and free of defects which effects performance, strength, and safety. The set(s) offered shall be a complete set, including all items required to weigh military vehicles and cargo.

3.1.1 The scales shall be certified by the National Type Evaluation Program (NTEP) to class IIII standards for 400 division accuracy in accordance with the National Institute of Standards and Technology (NIST) handbook 44.

3.2 Configuration. The scale shall be large enough to accommodate military vehicle wheels without requiring additional base supports when placed on unimproved ground of average density.

3.2.1 The scale shall have organic ramps which are a structural part of the unit.

3.2.2 The scale shall have a machined anti-skid base and top.

3.2.3 A fixed carrying handle shall be located on one side of the scale. The handle shall be easily repaired and/or replaced when damaged or broken.

3.2.4 The scale shall have a weight indicating digital display.

3.2.5 When multiple scales from the same manufacturer are electronically interconnected together the last scale in series shall be capable of displaying the total weight of the vehicle being weighed.

3.2.6 Each scale shall be also capable of displaying the individual axle weight.

3.2.7 No portion of the scale shall sustain any damage when run over by a vehicle.

3.2.8 The following dimensions are required to properly weigh vehicles in the military inventory.

3.2.8.1 Weighing surface area shall be a minimum of 10 inches by 11 inches.

3.2.8.2 The scale shall be of sufficient height to provide the capability of weighing the outer tire of a dual wheeled axle with the inner tire clearing the ground while in the tilted position as specified in 3.8.

3.3 Power. The scale shall be powered by commercially available (either direct from the scale supplier or from a source other than the scale supplier) alkaline batteries and/or rechargeable NiCAD and/or rechargeable NiMhi batteries.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

3.3.1 Batteries shall be capable providing power for a minimum of eight hours of continued use without recharging.

3.3.2 Recharging capabilities must be supplied to operate from a 12 volt DC system. The scale shall be designed and manufactured to accomplish recharging of batteries without removing batteries from the scale.

3.4 Performance. The scale shall have a performance range of 0 to 20,000 pounds.

3.4.1 The indicated weight shall be repeatable with the indicating weight inaccuracy not exceeding +/-1 percent of the applied load, throughout the range, or +/-50 pounds, whichever is greater.

3.5 Overload. The scale shall be capable of withstanding 1.5 times the rated capacity, or 30,000 lbs., without sustaining structural damage or permanent degradation of performance.

3.6 Weight indicating. The scale shall contain a weight indicating digital display at least 0.5 inches in height with a back light to improve visibility.

3.6.1 The scale indicator shall be graduated to 10 lb. increments.

3.6.2 The scale shall be supplied with individual push button controls on the keyboard for:

a. Zero function. This function shall zero the display when activated.
b. Peak hold. The peak hold mode shall indicate the maximum applied load.
c. Local/total mode. The "Local" mode function shall only display the weight being applied to that scale. The "Total" mode function shall display the total weight of that scale plus the weights of all scales connected in series before it.

3.7 Overall weight. Each scale weight shall not exceed 50 pounds.

3.7.1 The actual weight shall be marked on each scale for scales that weigh over 25 pounds.

3.8 Tilted position. The scale shall be accurate when operated up to and including 5 percent (approximately three degrees) out of level.

3.9 Storage/carrying case(s). The scale sets shall be contained in a durable storage/carrying case(s). The case(s) shall be capable of housing all components (scales, cables, manuals, etc.) of the scale set in separate compartments. The case(s) shall be supplied with carrying handles for easy transporting the scales.

3.9.1 For all cases that the total weight exceeds 25 pounds, the actual weight shall be clearly marked on each case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

3.10 Environmental conditions.

3.10.1 Operating temperature. The scale operating temperature shall be in accordance with the applicable NTEP certification.

3.10.2 Water. The operation of the scale shall not be affected by the presence of water.

3.10.3 Dust. The operation of the scale shall not be affected by the presence of dust.

3.10.4 Dirt. The operation of the scale shall not be affected by the presence of dirt.

3.10.5 Sand. The operation of the scale shall not be affected by the presence of sand.

3.11 Corrosion control. The scale shall be constructed of corrosion resistant materials and shall be suitable protected against corrosion.

3.12 Repair and calibration. The scale shall be designed so that minor repair and calibration can be performed at the field level.

3.12.1 The offeror/contractor shall provide a certificate of calibration (C of C) with each scale and a sample (C of C) to the cognizant engineer as part of the data package submitted to the engineer prior to final approval.

3.13 Service life. The scale shall be designed for a minimum service life of 8 years.

3.14 Interchangeability (optional feature). The scales provided shall be supplied with a common/standard government connection plug, communication language, connector plug pin arrangement, etc. which allows for the scales to be interchangeable with scales being supplied from different manufacturers.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Market acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this requirement. The offeror/contractor, if requested by the Government, shall supply proof of conforming to the subsections contained herein.

5.2 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

Government reserves the right to require proof of such conformance. Minor changes to the commercial product, with respect to ruggedizing and environmental suitability and protection shall be permitted, subject to the approval of the procurement office, to satisfy these requirements.

5.2.1 The offeror/contractor of the item shall have been producing a product meeting these requirements for at least 5 years.

5.2.2 The offeror/contractor of the item shall have sold at least 250 units meeting these requirements to the Government or the commercial market over the last five years.

5.3 Operation and maintenance manual. One copy of the commercial operation and maintenance manual, including top level illustrated parts breakdown and calibration procedures and adjustments shall be shipped with each unit. One additional copy (electronic copy in Adobe Acrobat® format is acceptable) of the operation and maintenance manual per acquisition order shall be supplied to the cognizant engineer at no additional cost to the Government. The address for the cognizant engineer is indicated in paragraph 5.4.

5.4 Warranty. Each unit shall be supplied with the standard commercial warranty on parts and labor. Information of warranty duration and expiration date, conditions of the warranty and point of contact shall be shipped with each unit. One additional copy (electronic copy in Adobe Acrobat® format is acceptable) of the warranty information per the acquisition order shall be mailed to the cognizant engineer at no additional cost to the Government to this address: FSC 6670 Engineer, WR-ALC/LEEE, 295 Byron Street, Robins AFB, GA 31098-1611.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.3(d)).

7. NOTES

7.1 Sources of documents.

7.1.1 FAR. Copies of the FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250. Electronic copies of the FAR may be obtained from http://www.arnet.gov/far/.

7.1.2 NIST handbooks. Copies of NIST handbooks may be obtained from the Office of Weights and Measures, NIST, 100 Bureau Drive, Stop 2600, Gaithersburg, MD 20899. Electronic copies of NIST handbooks may be obtained from http://ts.nist.gov/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

7.2 Part or identification number (PIN). The following PIN numbering procedure is for government purposes and does not constitute a requirement for the contractor.

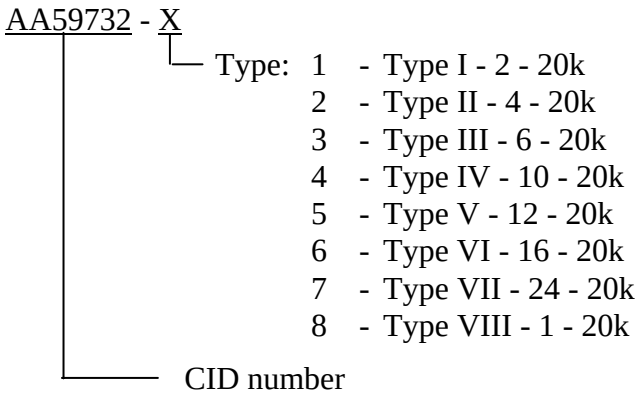

Example of reference part number: AA59732 - 1 would identify a Type I vehicle platform scale set with 2 scales with a total capacity of 40,000 lbs.

7.3 Ordering data. The acquisition order should specify the following information:

a. CID document number, revision, and CID PIN.
b. Type (see 2).
c. Preservation, packing, and marking (see 6.1)

7.4 Subject term (key word) listing.

Scale, cargo
Scale, vehicle
Total weight mode
Weigh mode
Zero function

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:	CIVIL AGENCY COORDINATING ACTIVITY:
Custodians: Army - GL Navy - CG Air Force - 99 DLA - GS	GSA - FSS Preparing Activity: Air Force - 84
Review Activities: Navy - MC	Agent Activity: Air Force – 99

(Project 6670-2006-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:25Z
Check the source to verify that this is the current version before use.