INCH POUND

MIL-H-83511/4B
10 Feb 1992
SUPERSEDING
MIL H 83511/4A
25 JUNE 1984

MILITARY SPECIFICATION SHEET

HEADSET - MICROPHONE, H 161F/GR

This specification is approved for use by all Depart ments and Agencies of the Department of Defense

The requirement for the acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-H 83511

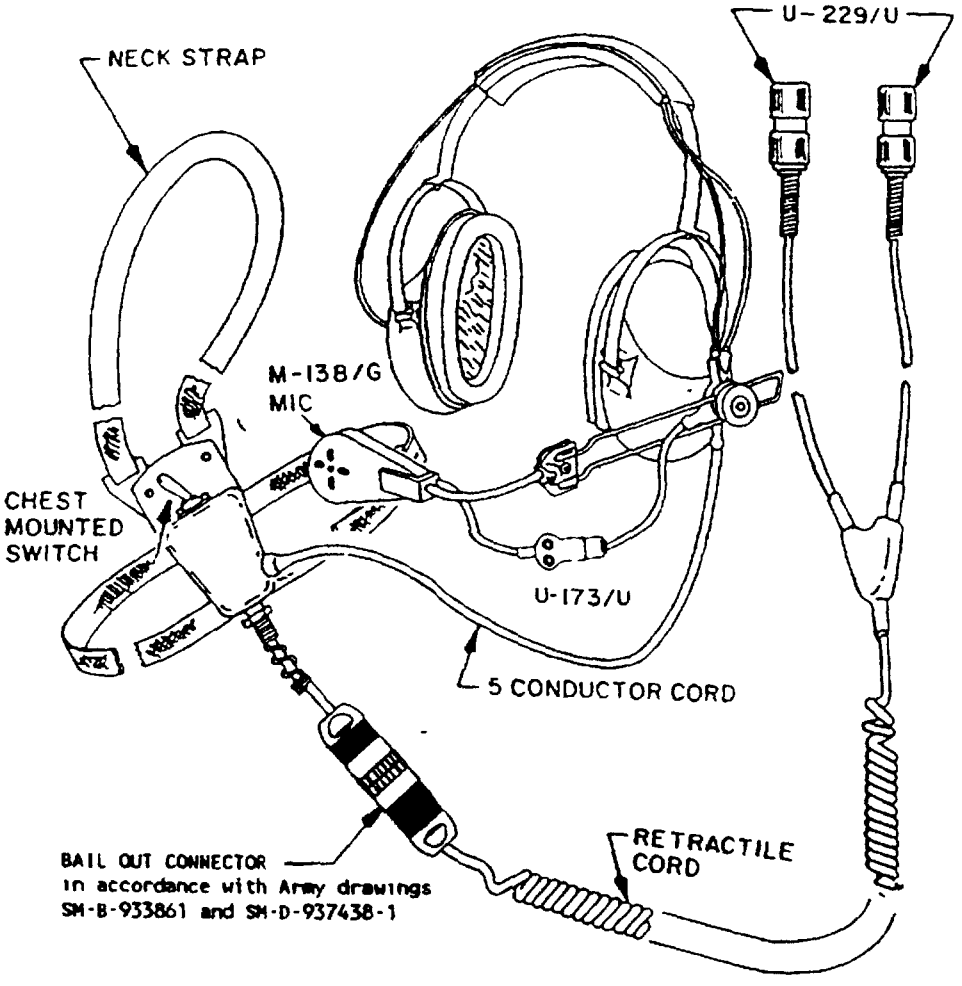


FIGURE 1a Headset-Microphone.

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

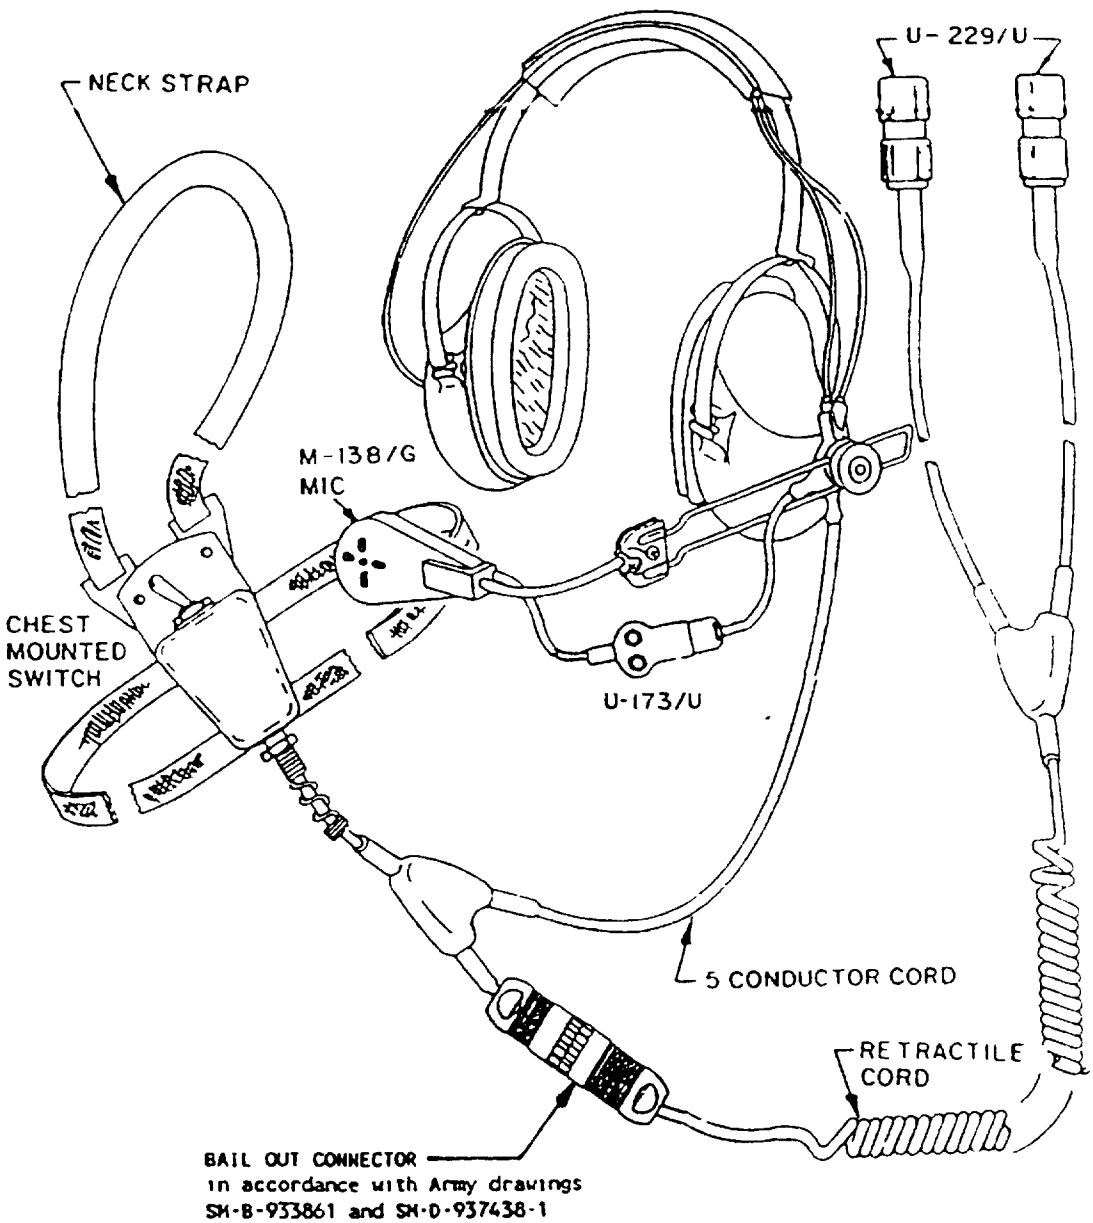


FIGURE 1b Headset Microphone

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction Design and construction shall be at the manufacturer's option using figures 1a and 1b

Earphones Two required, in accordance with Army drawing SM 8 933877

Microphone M138, in accordance with MIL-M-26542/10
Switch Toggle in accordance with MS35059 31

Chest mounted switch case assembly In accordance with Army drawing SM D-436135 with the exception of the CX 8652/GR cable assembly which is modified as detailed in this specification sheet. Cord connection from headset to switch case shall be made in accordance with figure 2a or 2b at the manufacturer's option

Cordage Connection shall be in accordance with the wiring diagram of figure 2 The construction of the individual cable assemblies shall be in accordance with the following military specifications or drawings

Headband cable assembly (ear to ear) WD 27/U in accordance with MIL C 10392, and MIL I 3930

Headset to chest switch cable assembly 5 conductor in accordance with Army drawing SCL 6608 Water tight interface with switch case assembly


Chest switch to bailout plug 5 conductor in accordance with Army drawing SCL 6608 Watertight interface with assembly

Cord Assemblies
Bail out connector to "Y" junction (retrax 6 1)-49 inches (1244 6mm)
"Y" junction to U 229/U - 8 inches (203 2mm)
"Y" junction to U 229/U - 9 inches (228 6mm)

Interchangeability The upper and lower cable assemblies of this headset microphone shall be completely interchangeable between, and mate with, cable assemblies of another manufacturer's H 161F/GR (the bailout jack of the upper assembly will mate mechanically and electrically with the bailout jack of the lower cable from another manufacturer.) The upper cable assembly of the H 161F/GR will mate mechanically with the lower cable assemblies of the DH-132 and DH 132A Combat Vehicle Crewman Helmets and will be electrically interchangeable (there will be no ballistic, bump or attenuation protection) with the DH 132 and DH-132A helmets

Revision letters are not used to denote changes due to the extensiveness of the changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

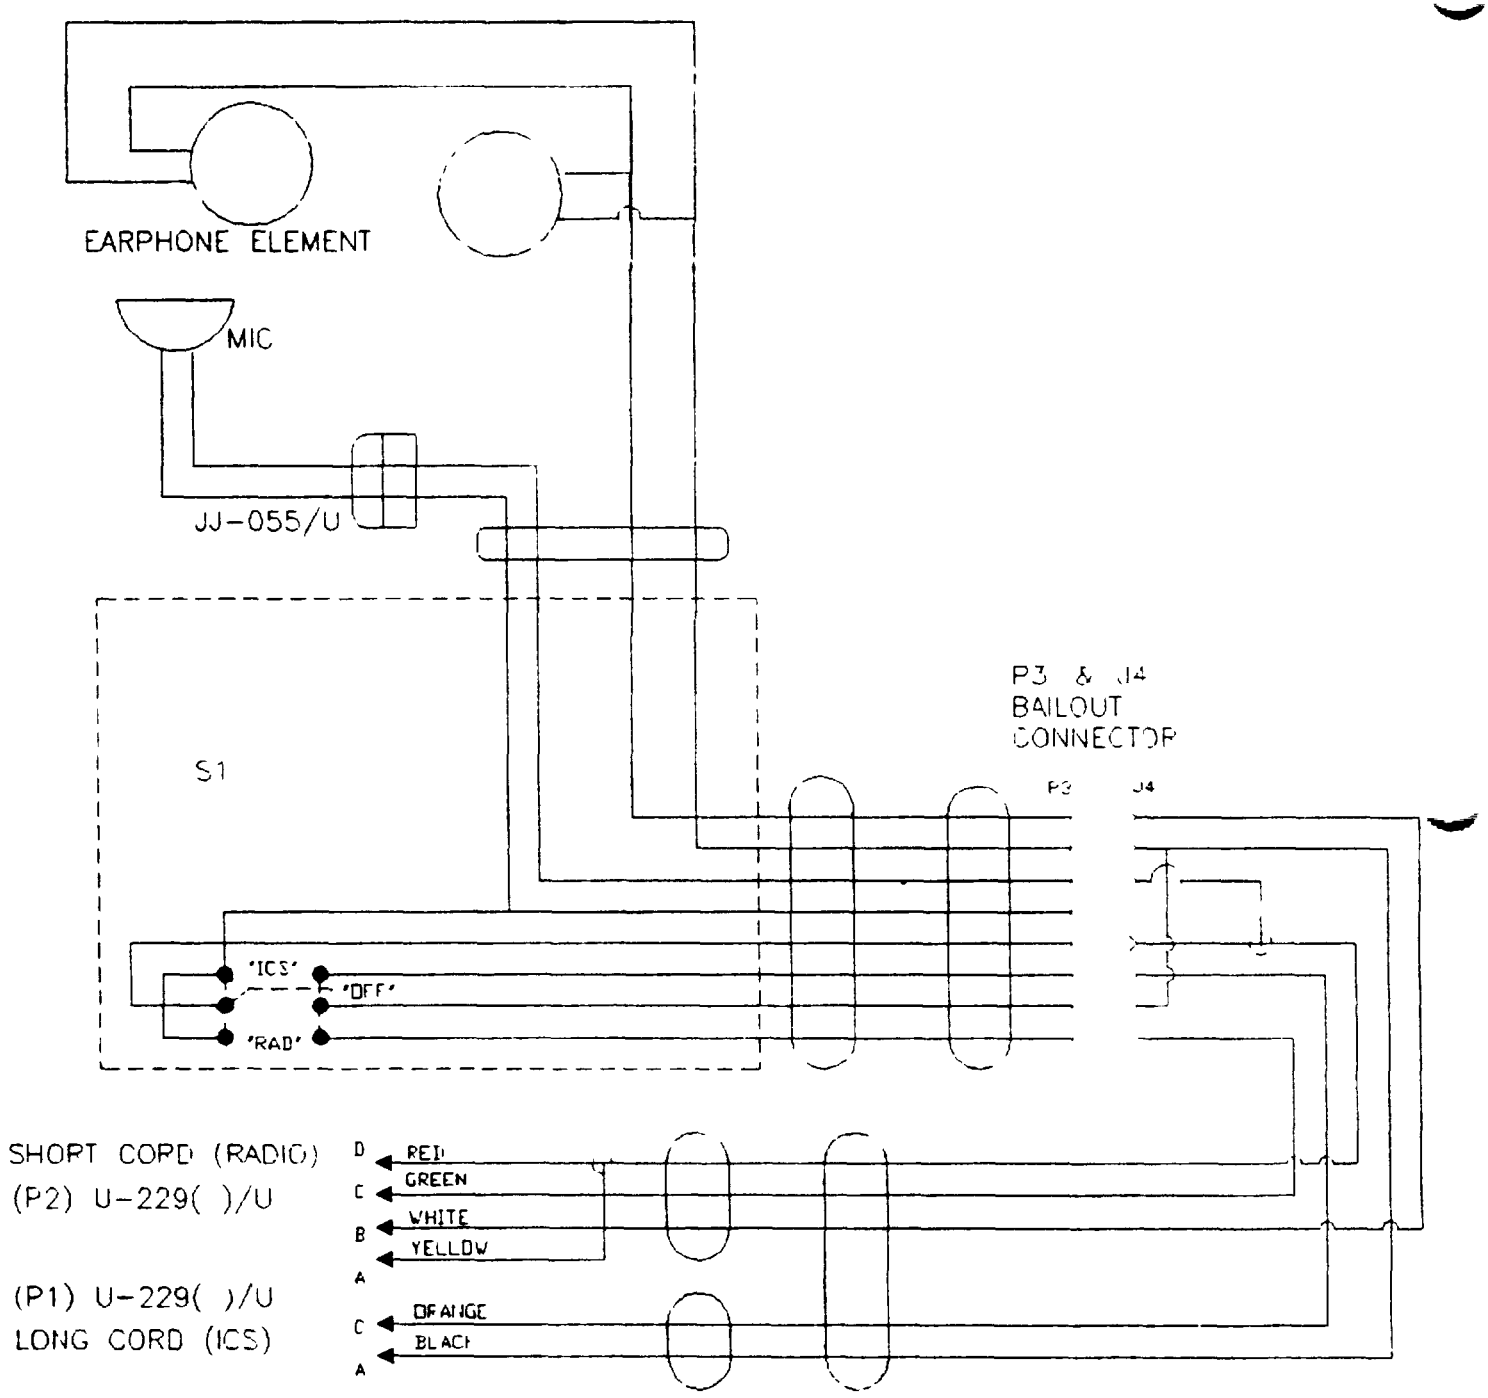

NOTE Switch S1 is mechanically maintained in the "ICS" and "OFF" positions, but is spring returned from the "RAD" position to the "OFF" position. The "OFF" position is not labeled on the escutcheon.

FIGURE 2a Wiring diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

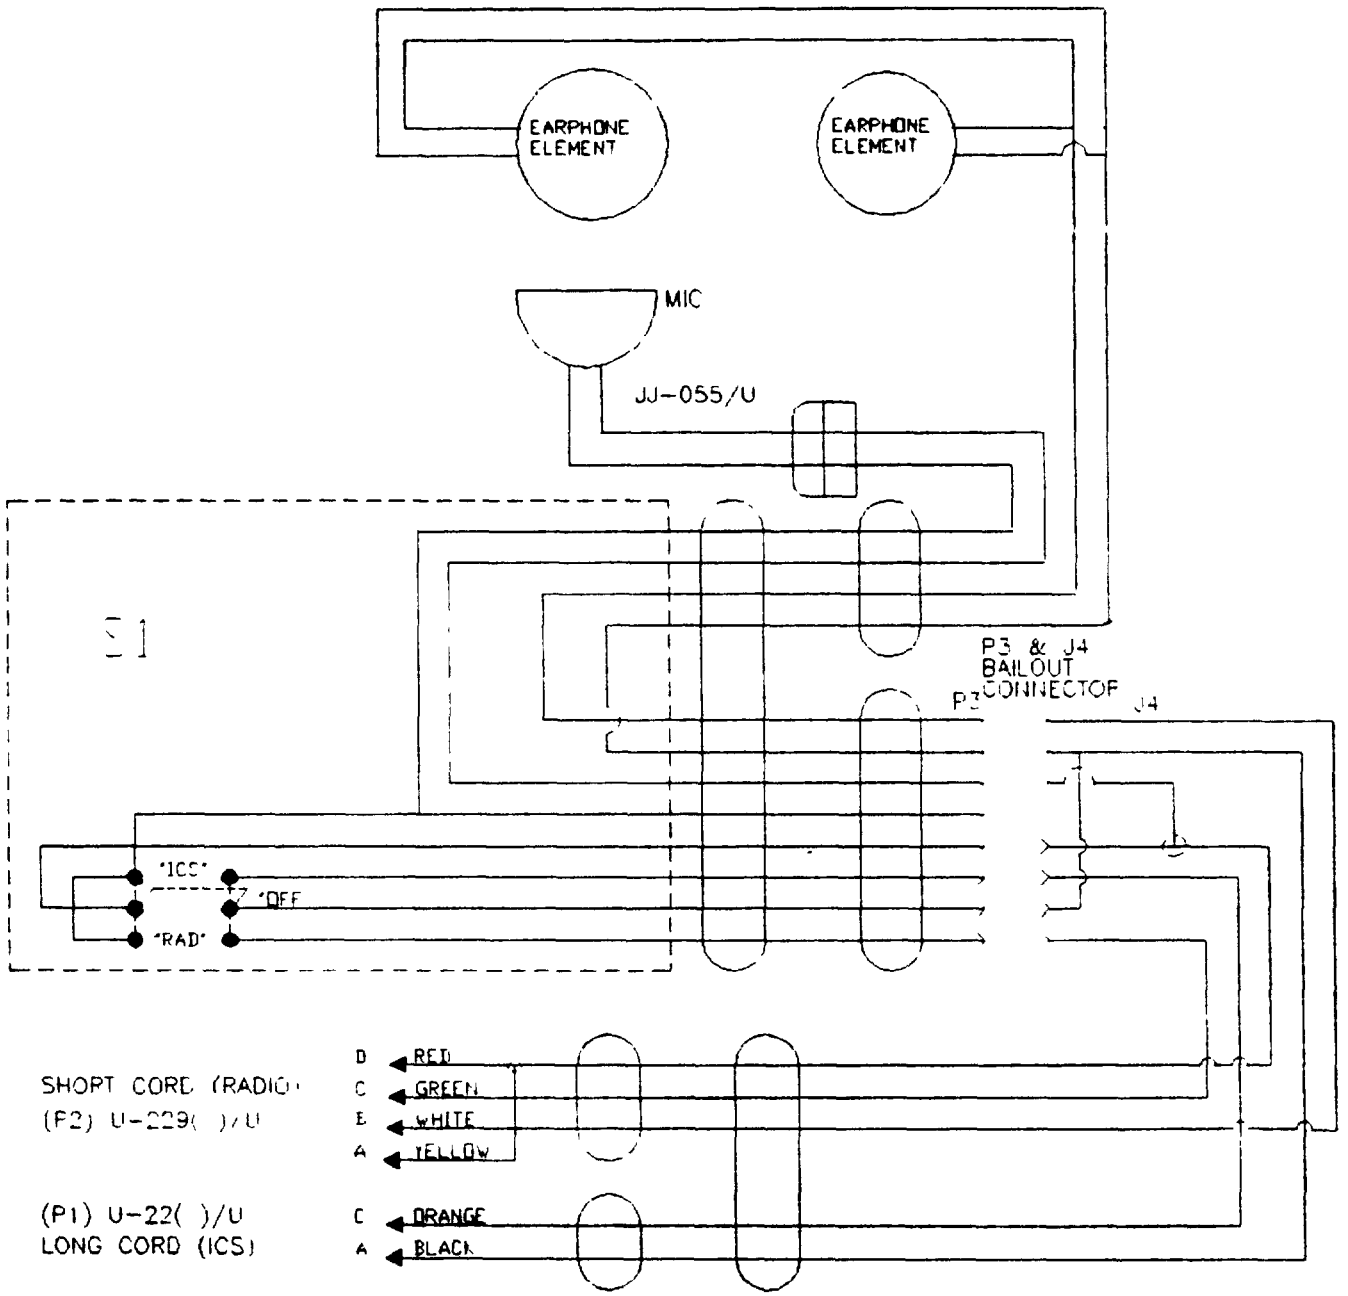

NOTE Switch S1 is mechanically maintained in the "ICS" and "OFF" positions, but is spring returned from the "RAD" position to the "OFF" position. The "OFF" position is not labeled on the escutcheon

FIGURE 2b Wiring diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

User activity
Navy - MC

Preparing activity
Air Force - 85

Agent.
DLA-ES

(Project 5965-0202)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:25Z
Check the source to verify that this is the current version before use.