MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, RECEPTACLE, MICROMINIATURE, POLARIZED SHELL, SOCKET CONTACTS, CLASS P, SOLDER TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-83513.

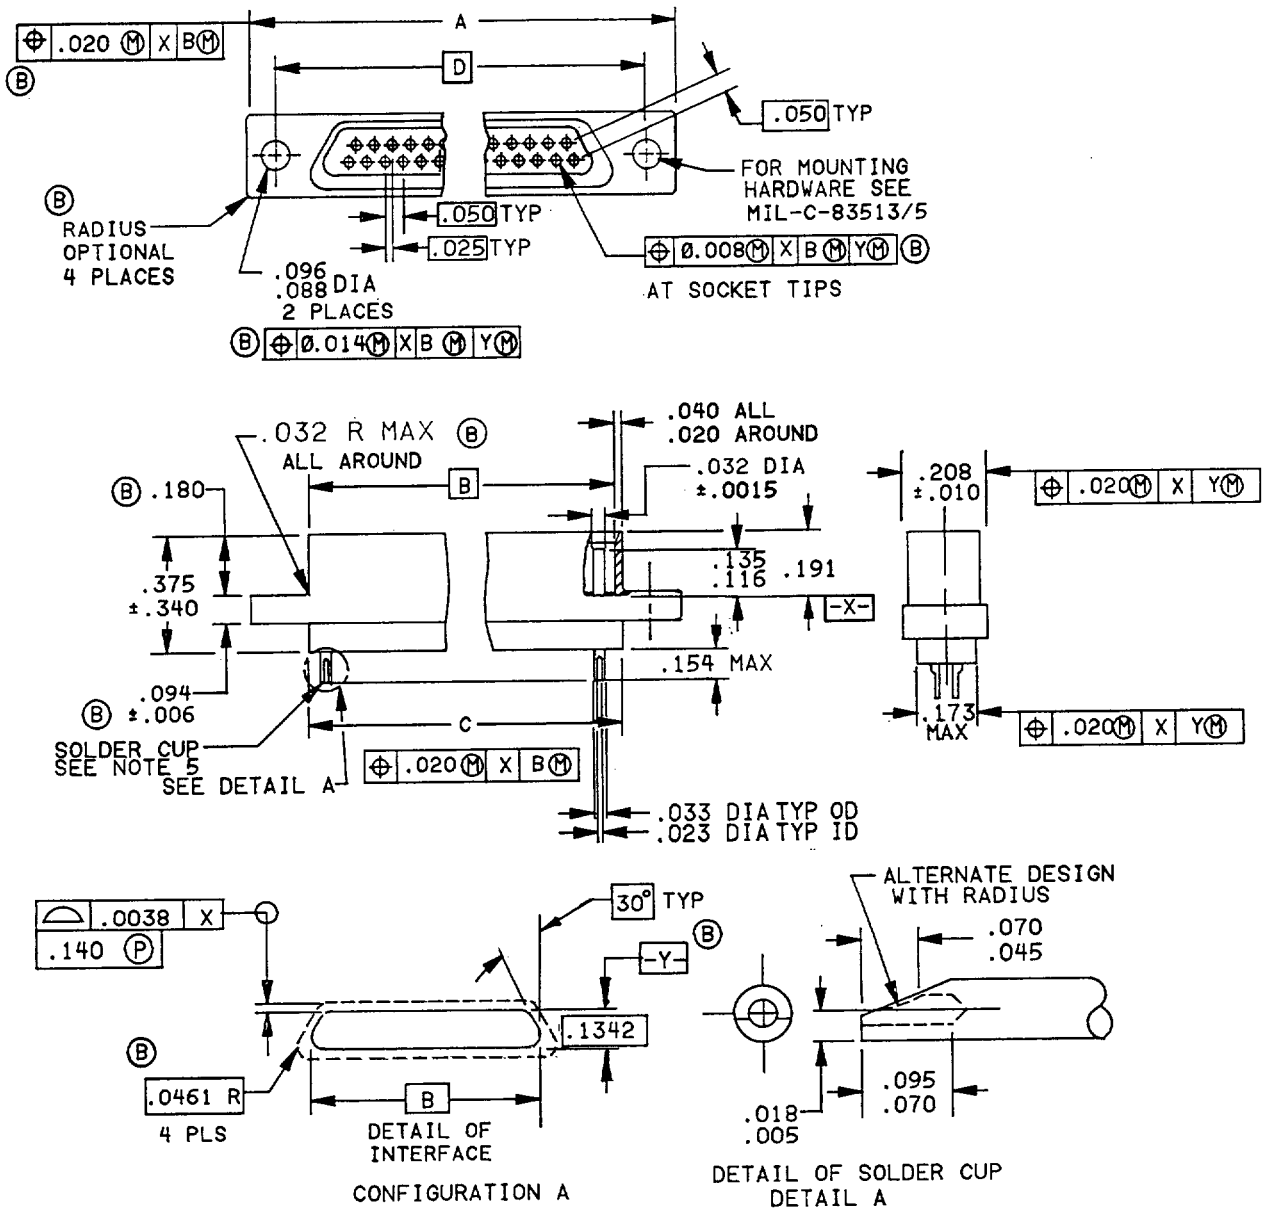


FIGURE 1. Connector, receptable (.050 spacing).

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

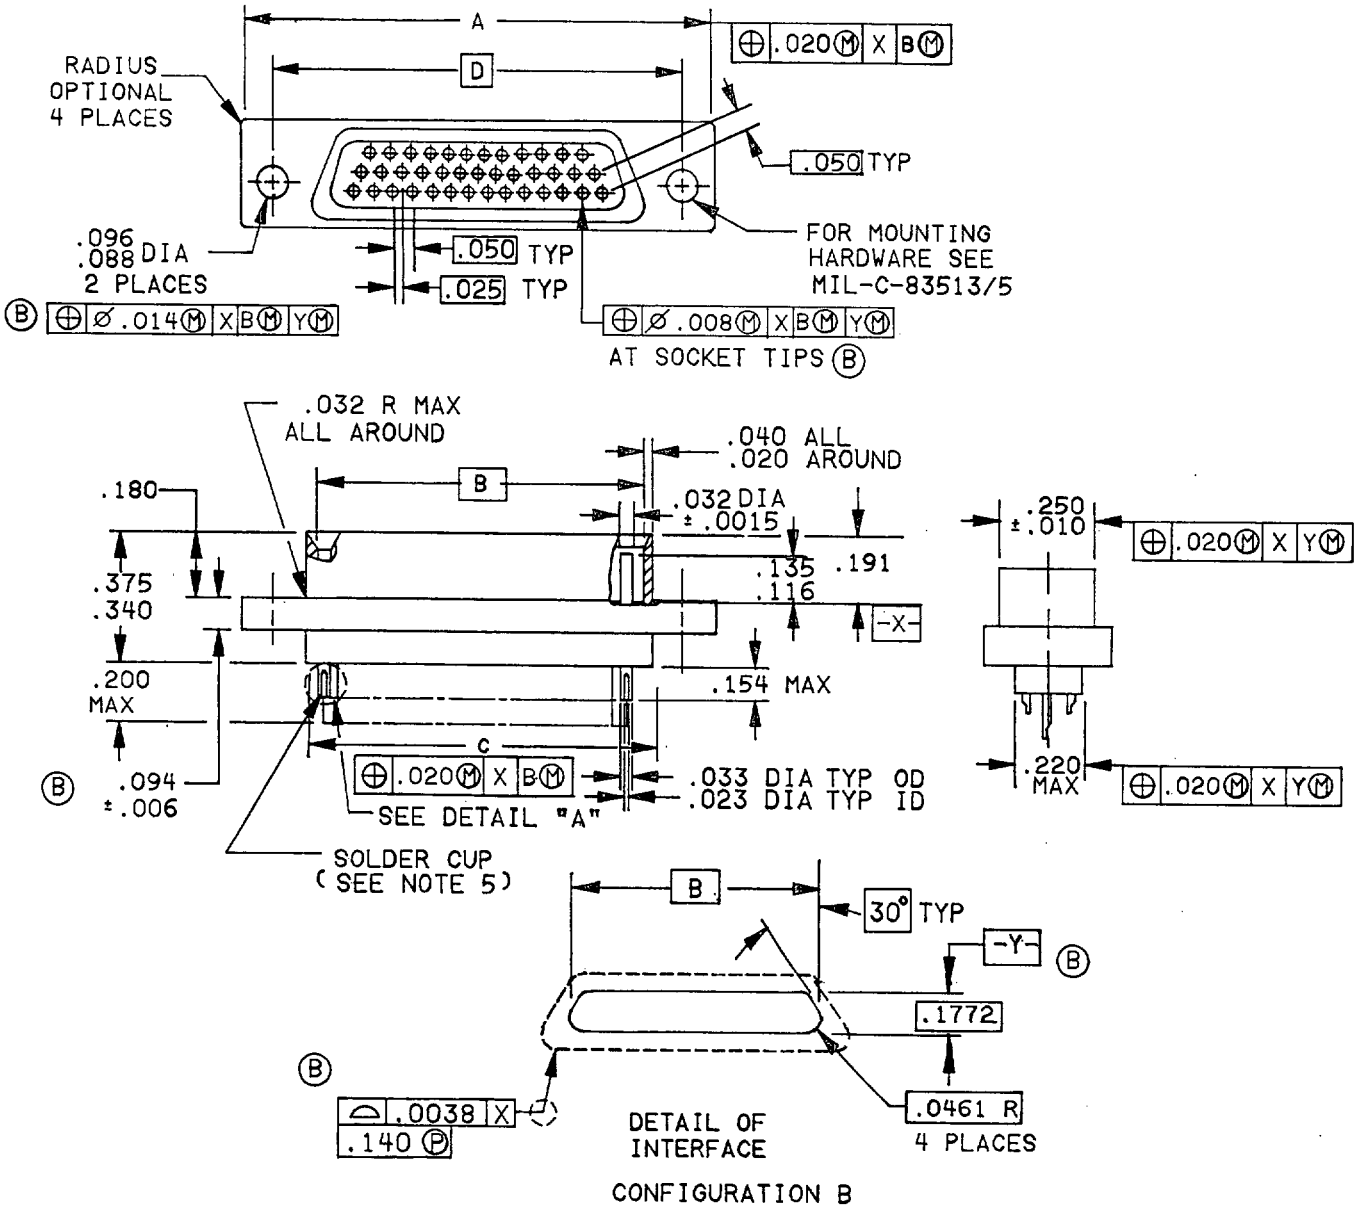


FIGURE 1. Connector, receptacle (.050 spacing) - Continued.

(B) Denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.


Number of cavities	A ±.010	B BSC	C+.010 -.018	D BSC
9	.778 (19.76)	.2922 (7.422)	.398 (10.11)	.565 (14.35)
15	.928 (23.57)	.4422 (11.232)	.548 (13.92)	.715 (18.16)
21	1.078 (27.38)	.5922 (15.042)	.698 (17.73)	.865 (21.97)
25	1.178 (29.92)	.6922 (17.582)	.798 (20.27)	.965 (24.51)
31	1.328 (33.73)	.8422 (21.392)	.948 (24.08)	1.115 (28.32)
37	1.478 (37.54)	.9922 (25.202)	1.098 (27.89)	1.265 +.010 (32.13)-.005
51	1.428 (36.27)	.9422 (23.932)	1.048 (26.62)	1.215 (30.86)

INCHES	MM
.0019	0.048
.002	0.05
.0038	0.097
.004	0.10
.005	0.13
.006	0.15
.010	0.25
.014	0.36
.018	0.46
.023	0.58
.025	0.64
.027	0.69
.032	0.81
.033	0.84
.036	0.91
.045	1.14
.0452	1.148
.0459	1.166
.050	1.27
.0669	1.699
.070	1.78
.088	2.24
.0884	2.245
.093	2.36
.094	2.39
.095	2.41
.110	2.79
.1138	2.891
.130	3.30
.173	4.39
.1768	4.491
.199	5.05
.200	5.08
.208	5.28
.220	5.59
.250	6.35
.360	9.14
.395	10.03


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Metric equivalents are in parentheses or columns.
5. Solder cup will accept size 26 AWG maximum wire.

FIGURE 1. Connector, plug (.050 spacing) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.




9 CAVITY

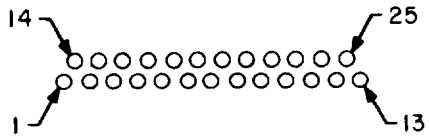


25 CAVITY




15 CAVITY

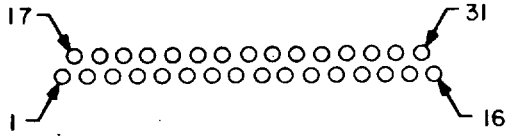


31 CAVITY

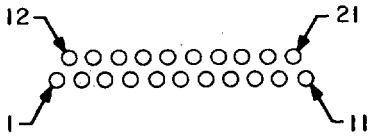

21 CAVITY

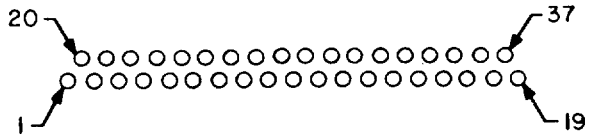

37 CAVITY

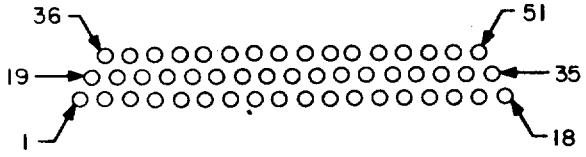

51 CAVITY

NOTE: Engaging face of socket insert shown cavity identification numbers are for reference only and do not appear on part.

FIGURE 2. Insert arrangement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. This specification sheet describes the socket side of a rectangular, plastic shell connector. This connector uses reverse gender contacts, i.e., the live pin recessed in the insulator with the static socket protruding from a shrouded interface.

Contact identification: See figure 2 for contact layout numbering.

Contact connection: The pin contact (being recessed in the insulator) is normally connected to the live side of the circuit.

Current rating, maximum: 3 amperes per contact.

Ⓑ Mounting and mating hardware: Hardware is to be ordered separately (see MIL-C-83513/5, configurations A and B).

Mating plug: Shall conform to MIL-C-83513/6 or MIL-C-83513/8.

Example of part number:

M83513/07- (Specification sheet number)

A (Insert arrangement (see figure 2))

A = 9
B = 15
C = 21
D = 25
E = 31
F = 37
G = 51

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, ME
Navy - CG, MC

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3477-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.