INCH-POUND

MIL-DTL-83522/8D
3 April 2023
SUPERSEDING
MIL-C-83522/8C
17 May 2006

MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, FIBER OPTIC, SINGLE TERMINUS, THREADED, BULKHEAD, HEX NUT MOUNT

Inactive for new design after 17 August 1999

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83522.


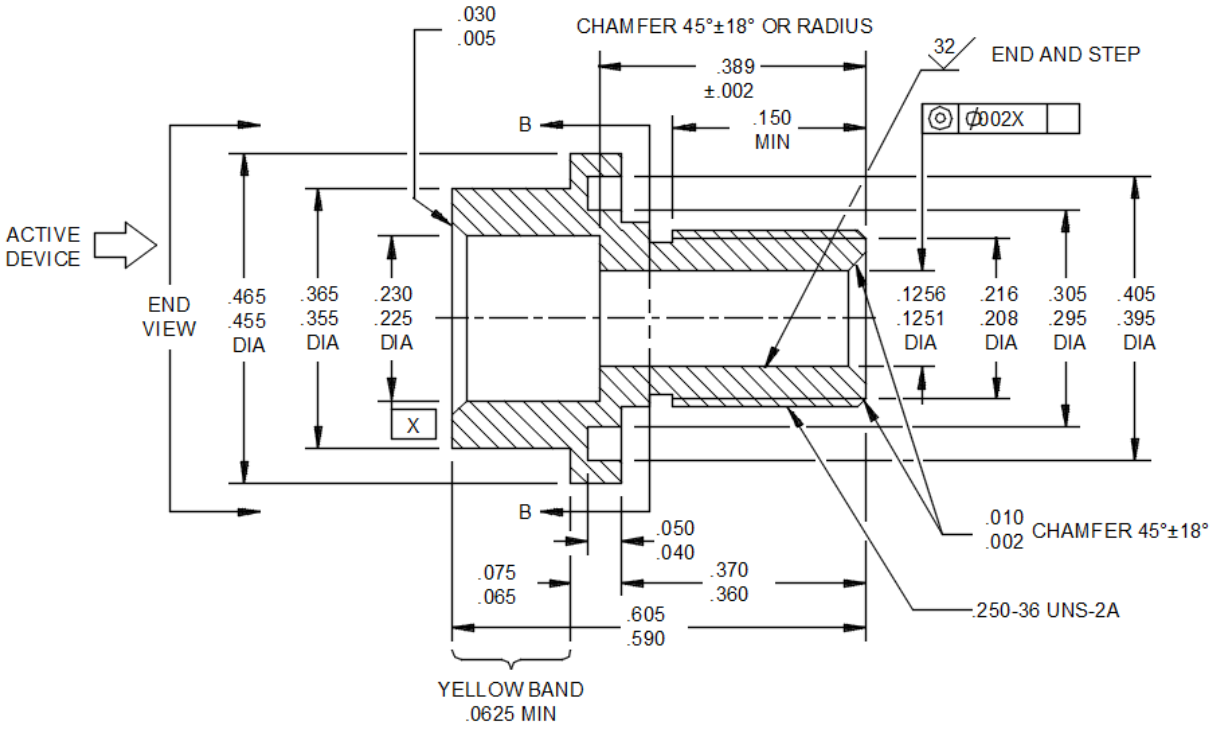


FIGURE 1. Dimensions and configuration.


AMSC N/A
FSC 6060

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

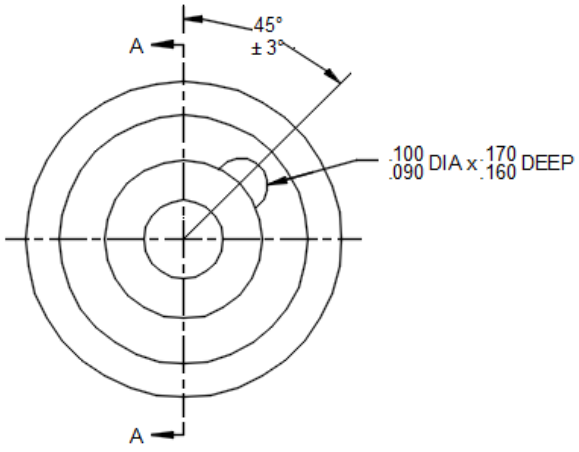

END VIEW

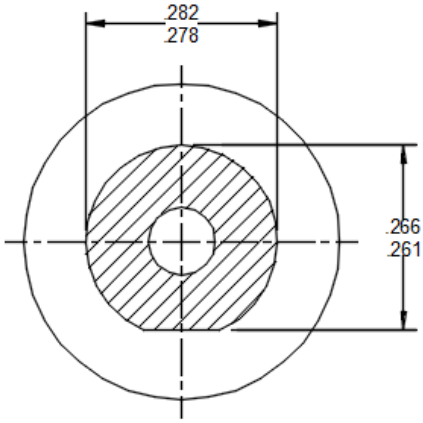

SECTION B-B

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.100	2.54	.250	6.35	.370	9.40
.005	0.13	.1251	3.177	.261	6.63	.389	9.88
.010	0.25	.1256	3.190	.266	6.76	.395	10.03
.030	0.76	.150	3.81	.278	7.06	.405	10.29
.040	1.02	.160	3.06	.282	7.16	.455	11.56
.050	1.27	.170	4.31	.295	7.49	.465	11.81
.0625	1.585	.208	5.28	.305	7.75	.590	14.99
.065	1.65	.216	5.48	.355	9.02	.605	15.37
.075	1.91	.225	5.72	.360	9.14		
.090	2.29	.230	5.84	.365	9.27		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm) for three place decimals.
4. When applicable, three holes .016 (0.41 mm) minimum diameter, equally spaced, are required for safety wiring after mating. Location on the coupling nuts optional.

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

Part or Identifying Number: M83522/8-01.

REQUIREMENTS:

Metals: The adapter housing and other metal components shall be of corrosion resistant steel in accordance with SAE-AMS-QQ-S-763, class 303 or nickel plated brass in accordance with ASTM-B36/B36M alloys C23000, C24000, C26000, or C26800 or ASTM-B16/B16M or ASTM-B122/B122M alloys C377000, C46400, C48200, or C48500.

Weight: 5 grams maximum.

Safety wire holes: Not applicable.

Force to engage and disengage:

Longitudinal force: 12 pounds maximum.

Torque: 4 inch-pounds maximum.

Coupling proof torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Ozone exposure: Not applicable.

Receptacle accessories: Receptacle accessories shall include one internal tooth lock washer (.410 inch maximum by .018 inch thick); one hex nut (.3125 inch by .065 inch thick maximum); one plastic device ring (.229 inch diameter maximum by .085 inch thick maximum); one fluoroelastomer (VITTON rubber) o-ring (.30 inch diameter by .054 inch thick); and one dust cover.

NOTE: The receptacle mates with MIL-DTL-83522/1 plug and MIL-DTL-83522/2 plug.

The receptacle accepts TO can sizes 18, 46, and 52.

Changes from previous issue. The margins of this standard are marked with vertical lines to indicate modifications generated by this change. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents: In addition to MIL-DTL-83522, this document references the following:

MIL-DTL-83522/1	ASTM-B16/B16M	ASTM-B122/B122M
MIL-DTL-83522/2	ASTM-B36/B36M	SAE-AMS-QQ-S-763

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6060-2023-007)

Review activities:
Navy - AS
Air Force – 03, 19, 33, 93
DIA - DI
NASA - NA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.