METRIC


MIL-C-83527/4B
8 June 1992
SUPERSEDING
MIL-C-83527/4A
28 December 1988

MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 3

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83527

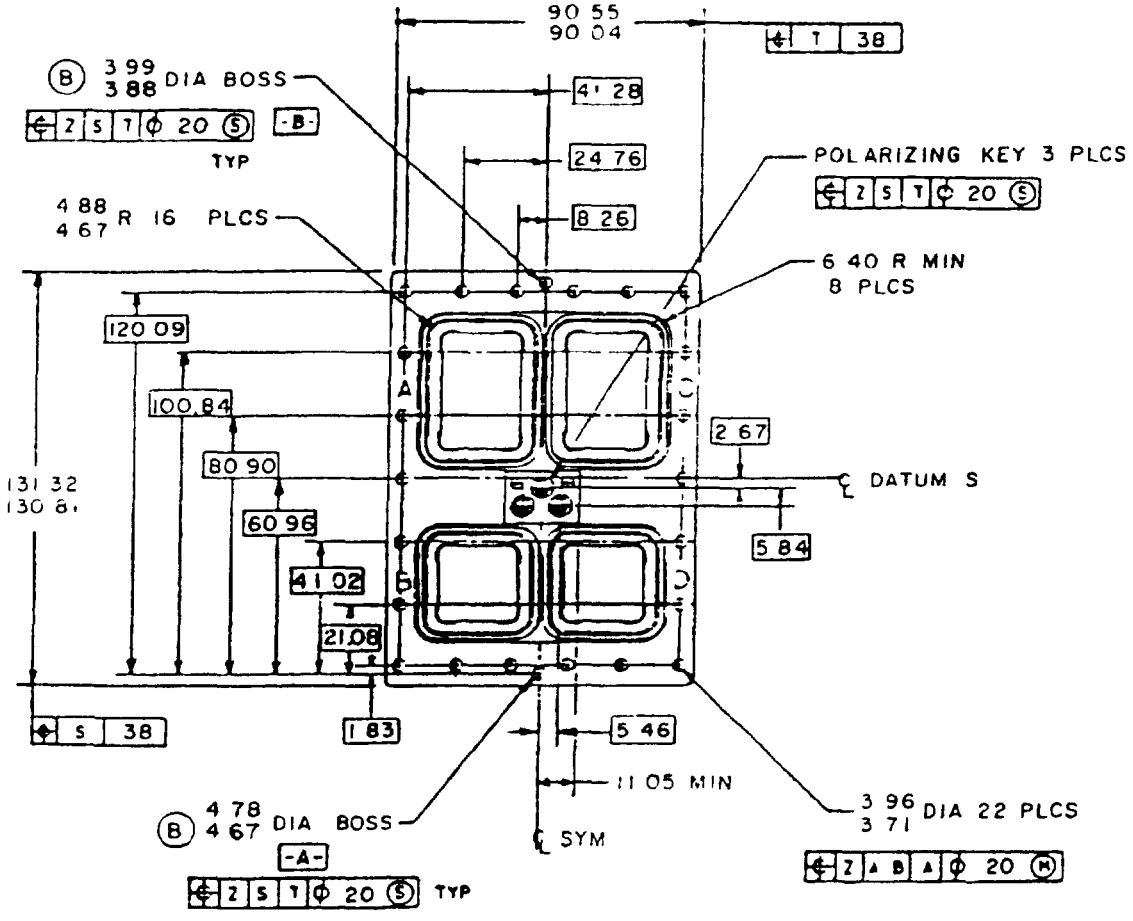

FRONT VIEW

FIGURE 1 Connector, receptacle

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

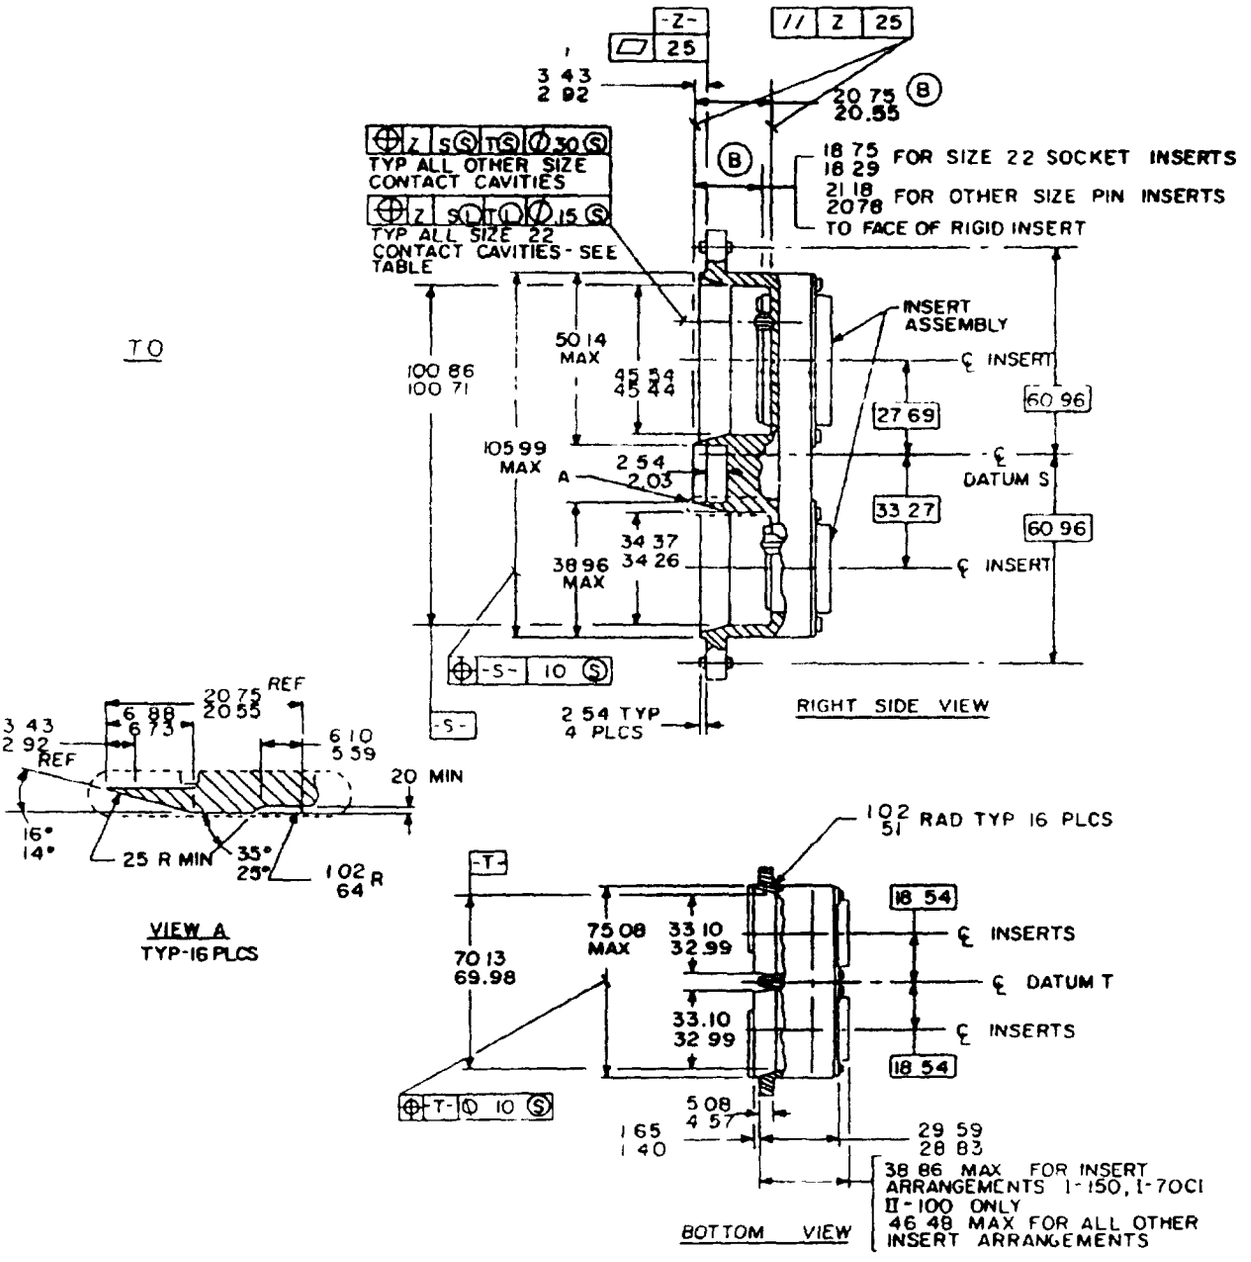


FIGURE 1 Connector, receptacle - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

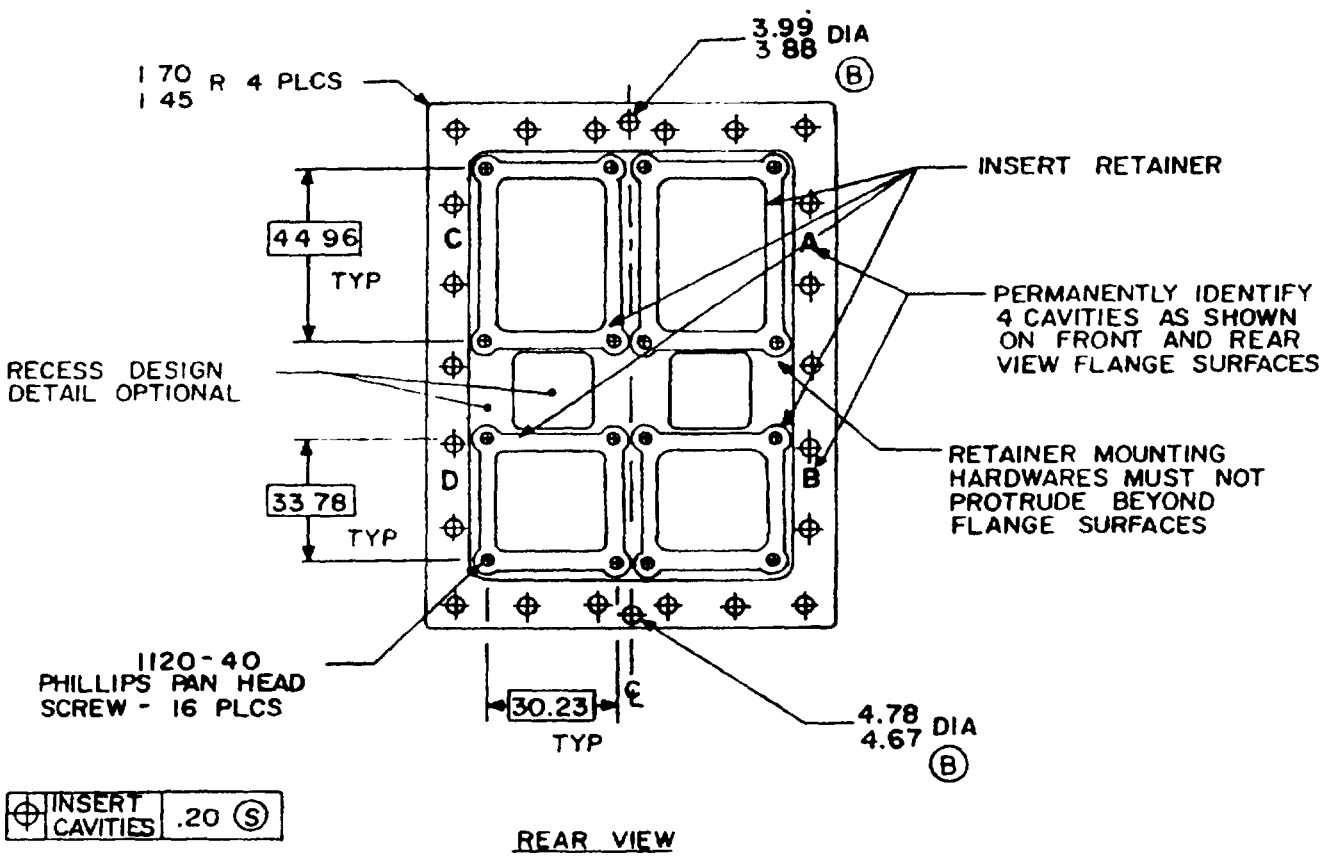


FIGURE 1 Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

Datum T	Datum S		
	100 71 (3 965)	100 74 (3.966)	100 76 (3 967)
69.98 (2 755)	0 30 (012)	0 30 (.012)	0 30 (012)
70 00 (2 756)	0.30 (012)	0 30 (012)	0 30 (012)
70 02 (2 757)	0.30 (012)	0 30 (012)	0 30 (012)
70 05 (2 758)	0.28 (011)	0 28 (011)	0 28 (011)
70 08 (2 759)	0 25 (010)	0.25 (.010)	0 25 (010)
70 10 (2 760)	0 23 (009)	0 23 (009)	0 23 (009)
70 13 (2 761)	0 20 (008)	0.20 (008)	0 20 (008)
	Datum S		
100 79 (3.968)	100 81 (3 969)	100 84 (3 970)	100 86 (3 971)
0 28 (011)	0 25 (.010)	0.23 (009)	0 20 (008)
0 28 (011)	0 25 (010)	0 23 (009)	0 20 (008)
0.28 (011)	0.25 (010)	0 23 (009)	0 20 (008)
0 25 (010)	0 23 (009)	0 23 (009)	0 20 (008)
0 23 (009)	0 23 (009)	0 20 (008)	0 18 (007)
0 23 (009)	0 20 (008)	0.18 (007)	0 18 (007)
0 20 (008)	0 18 (007)	0,18 (007)	0 15 (.006)

FIGURE 1 Connector, receptacle - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

mm	Inch	mm	Inch	mm	Inch	mm	Inch
0 15	006	3 91	154	16 97	55	46 48	1 830
0 20	008	3 96	156	17 58	692	50 14	1 974
0.25	010	3 99	157	18 54	730	60 96	2 4
0 30	012	4 57	180	20 55	809	70 03	2 757
0 38	.015	4 67	.184	21.08	830	70 13	2 761
0 79	.031	4 70	185	24 76	975	75.08	2 956
1.40	055	4 78	188	27 69	1 090	80 90	3 185
1 45	057	4 88	192	32.99	1 299	90 04	3.545
1.65	.065	5 08	2	33.10	1.303	90 55	3.565
1 70	067	5 46	215	33 27	1 310	100 71	3 965
1 83	072	5 84	230	34 32	1 351	100 84	3 970
2 03	080	6 40	252	34 41	1 355	100.86	3 971
2 11	083	8.26	325	38.96	1 534	105 99	4 173
2 54	1	10.80	425	41 02	1 615	120.09	4 728
2 67	105	10 92	430	40.28	1 625	130 81	5 15
3 71	146	11.05	435	45 49	1 791	131.32	5 170
3 88	153			45 54	1 793		

NOTES.
1. Dimensions are in millimeters
2. Inch equivalents are in parentheses
3. Inch equivalents are given for general information only.

FIGURE 1 Connector, receptacle - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS


Dimensions and configuration Shall be in accordance with figure 1

Contacts. See MIL-C-39029/93, /94, /96, /97, and /99.

Inserts See MIL-STD-1842 and MIL-C-83527/8

Mating connector See MIL-C-83527/3

Military Part or Identifying Number (PIN)

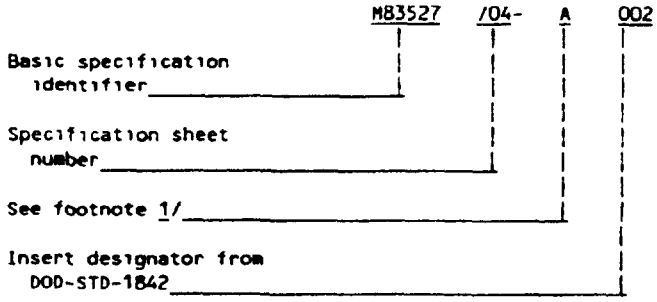

1/ "A" designator for insert with contacts, "B" designator for insert without contacts

CONCLUDING MATERIAL

Custodians.
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-3802-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.