METRIC

MIL-DTL-83527/4C
13 January 2004
SUPERSEDING
MIL-C-83527/4B
8 June 1992

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 3

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83527.

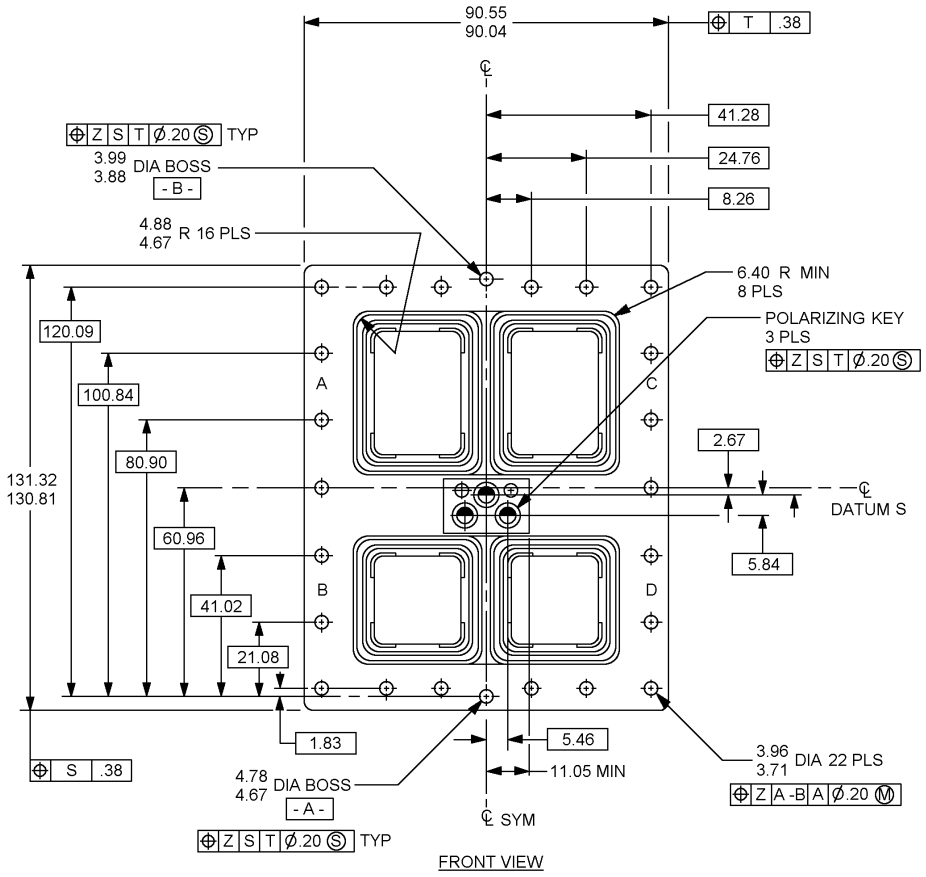


FIGURE 1. Connector, receptacle.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

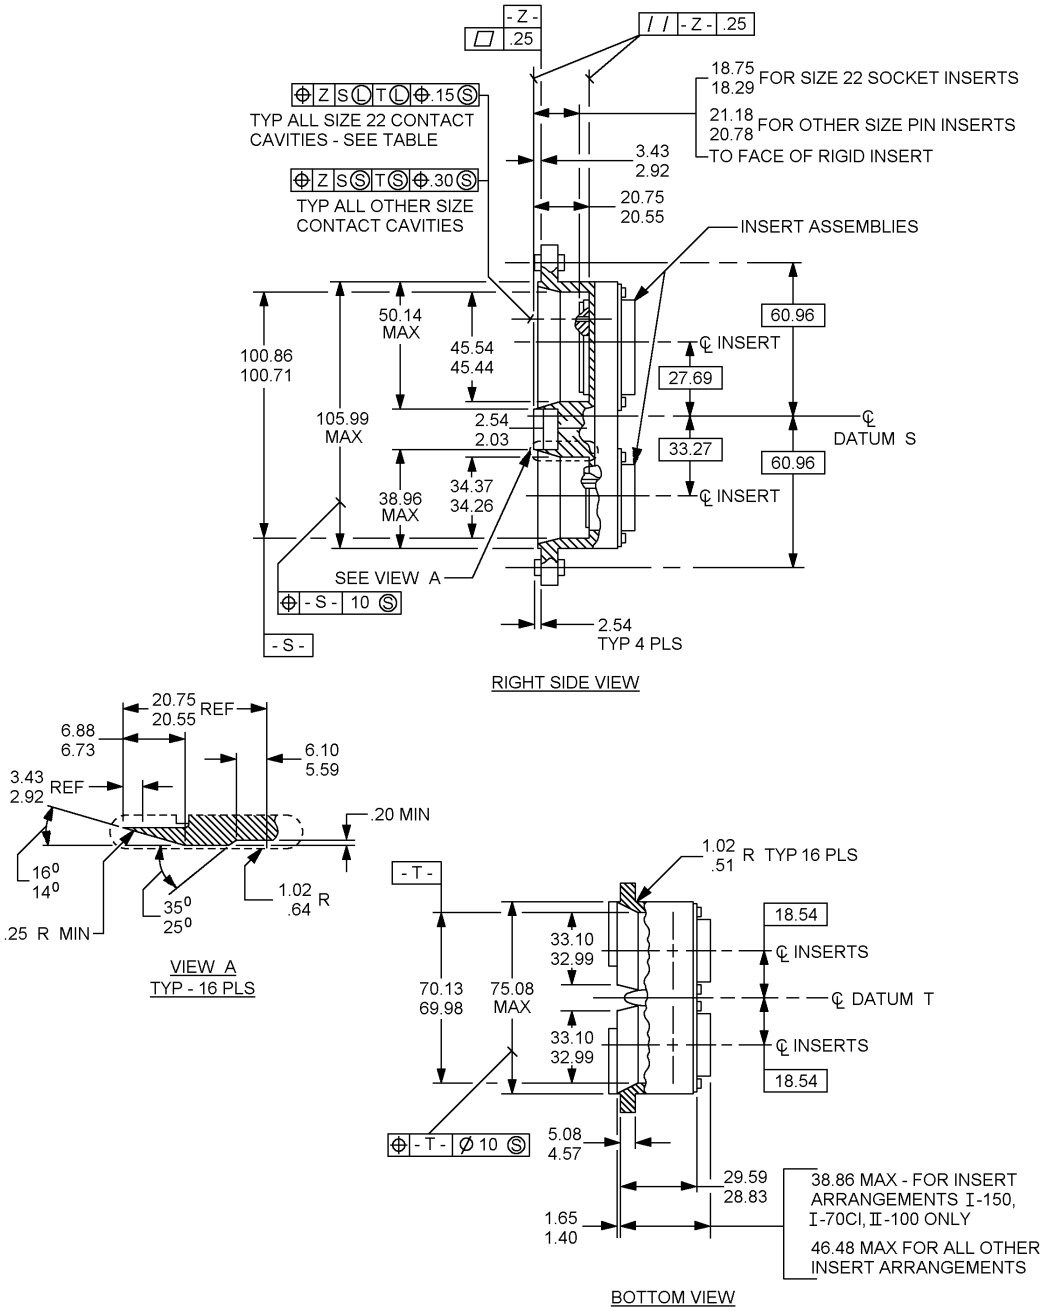


FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

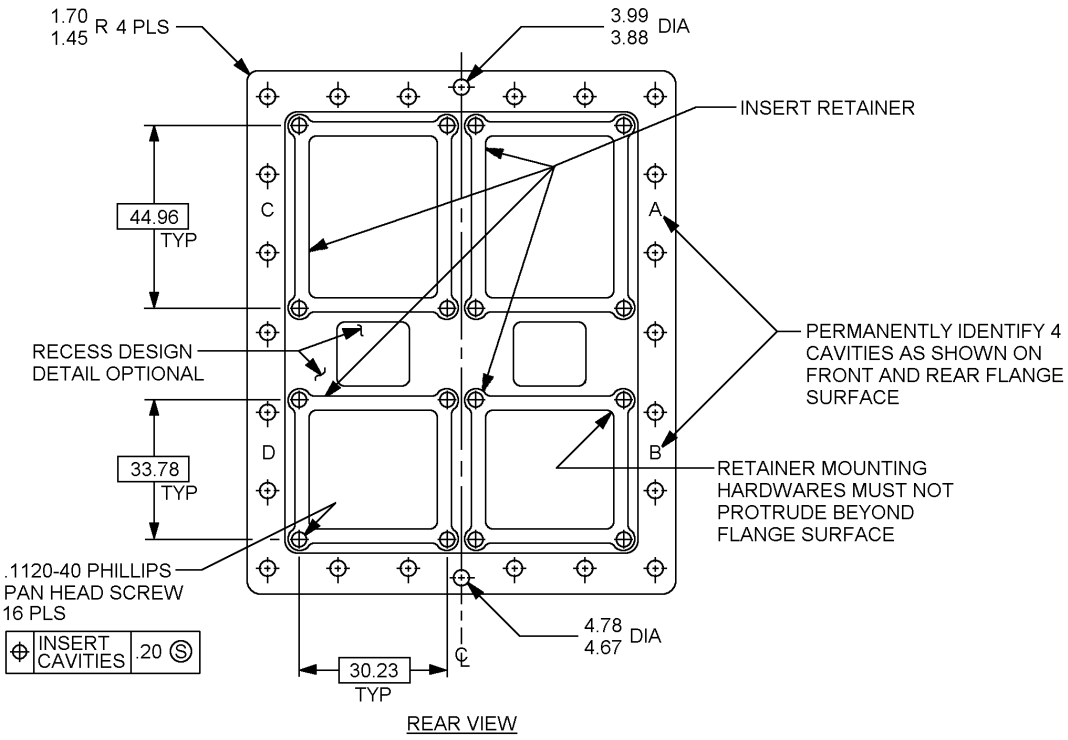


FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

Datum T	Datum S		
	100.71 (3.965)	100.74 (3.966)	100.76 (3.967)
69.98 (2.755)	0.30 (.012)	0.30 (.012)	0.30 (.012)
70.00 (2.756)	0.30 (.012)	0.30 (.012)	0.30 (.012)
70.02 (2.757)	0.30 (.012)	0.30 (.012)	0.30 (.012)
70.05 (2.758)	0.28 (.011)	0.28 (.011)	0.28 (.010)
70.08 (2.759)	0.25 (.010)	0.25 (.010)	0.25 (.010)
70.10 (2.760)	0.23 (.009)	0.23 (.009)	0.23 (.009)
70.13 (2.761)	0.20 (.008)	0.20 (.008)	0.20 (.008)
Datum S			
100.79(3.968)	100.81 (3.969)	100.84 (3.970)	100.86 (3.971)
0.28 (.011)	0.25 (.010)	0.23 (.009)	0.20 (.008)
0.28 (.011)	0.25 (.010)	0.23 (.009)	0.20 (.008)
0.28 (.011)	0.25 (.010)	0.23 (.009)	0.20 (.008)
0.25 (.010)	0.23 (.009)	0.23 (.009)	0.20 (.008)
0.23 (.009)	0.23 (.009)	0.20 (.008)	0.18 (.007)
0.23 (.009)	0.20 (.008)	0.18 (.007)	0.18 (.007)
0.20 (.008)	0.18 (.007)	0.18 (.007)	0.15 (.006)

mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.15	.006	3.91	.154	16.97	.55	46.48	1.830
0.20	.008	3.96	.156	17.58	.692	50.14	1.974
0.25	.010	3.99	.157	18.54	.730	60.96	2.4
0.30	.012	4.57	.180	20.55	.809	70.03	2.757
0.38	.015	4.67	.184	21.08	.830	70.13	2.761
0.79	.031	4.70	.185	24.76	.975	75.08	2.956
1.40	.055	4.78	.188	27.69	1.090	80.90	3.185
1.45	.057	4.88	.192	32.99	1.299	90.04	3.545
1.65	.065	5.08	.2	33.10	1.303	90.55	3.565
1.70	.067	5.46	.215	33.27	1.310	100.71	3.965
1.83	.072	5.84	.230	34.32	1.351	100.84	3.970
2.03	.080	6.40	.252	34.41	1.355	100.86	3.971
2.11	.083	8.26	.325	38.96	1.534	105.99	4.173
2.54	.1	10.80	.425	41.02	1.615	120.09	4.728
2.67	.105	10.92	.430	40.28	1.625	130.81	5.15
2.71	.146	11.05	.435	45.49	1.791	131.32	5.170
3.88	.153			45.49	1.793		

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses.
3. Inch equivalents are given for general information only.

FIGURE 1. Connector, receptacle – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS


Dimensions and configuration: Shall be in accordance with figure 1.

Contacts: See MIL-C-39029/93, /94, /97 and /99.

Inserts: See DOD-STD-1842 and MIL-C-83527/8.

Mating connector: See MIL-DTL-83527/3.

Part or Identifying Number (PIN) example:

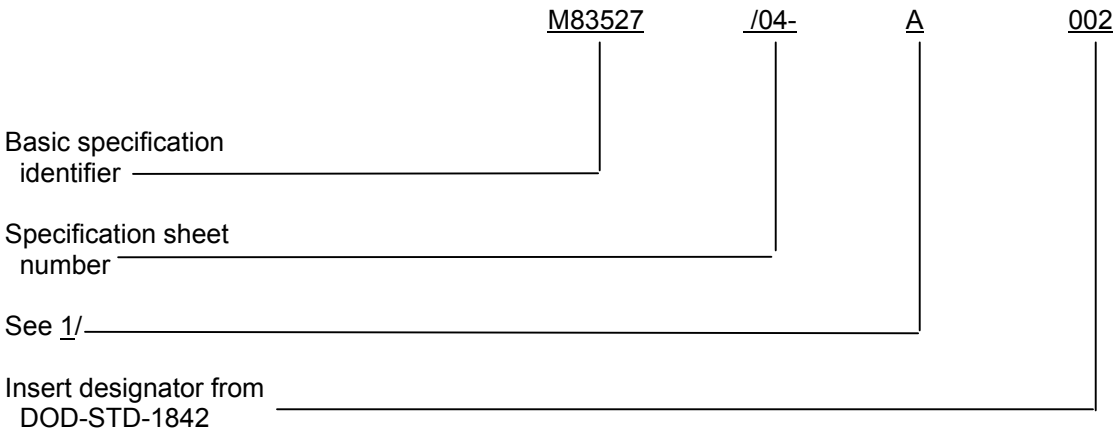

1/ "A" designator for insert with contacts, "B" designator for insert without contacts.

Reference documents. In addition to MIL-DTL-83527, this document references the following:

MIL-C-39029/93
MIL-C-39029/94
MIL-C-39029/97
MIL-C-39029/99
MIL-C-83527/8
MIL-DTL-83527/3
DOD-STD-1842

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-4509-004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online data at http://www.dodssp,daps.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.