METRIC

MIL-DTL-83538/3C
30 October 2006
SUPERSEDING
MIL-DTL-83538/3B
13 May 2005

DETAIL SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL, ADAPTER, BUFFER PLUG, NONREMOVABLE PIN CONTACTS, FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83538.

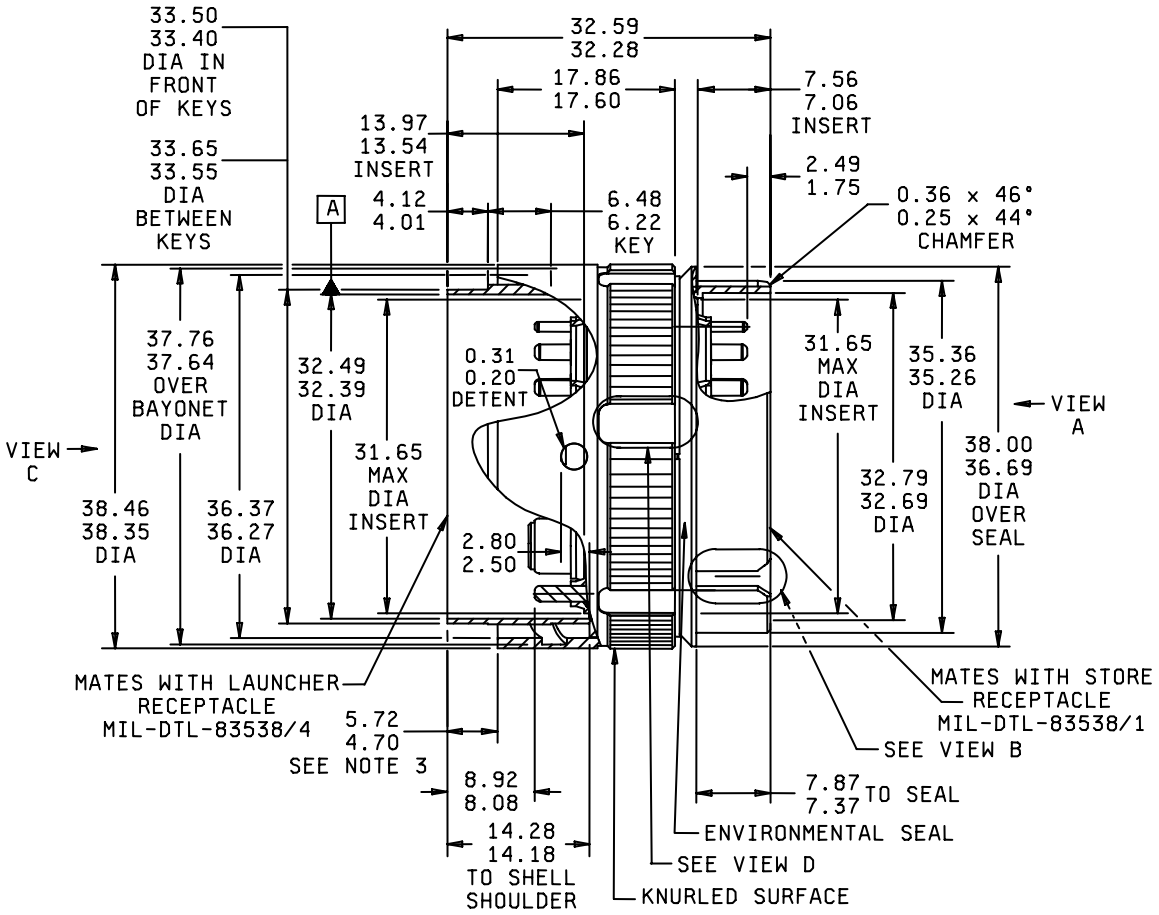


FIGURE 1. Buffer plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:09Z
Check the source to verify that this is the current version before use.

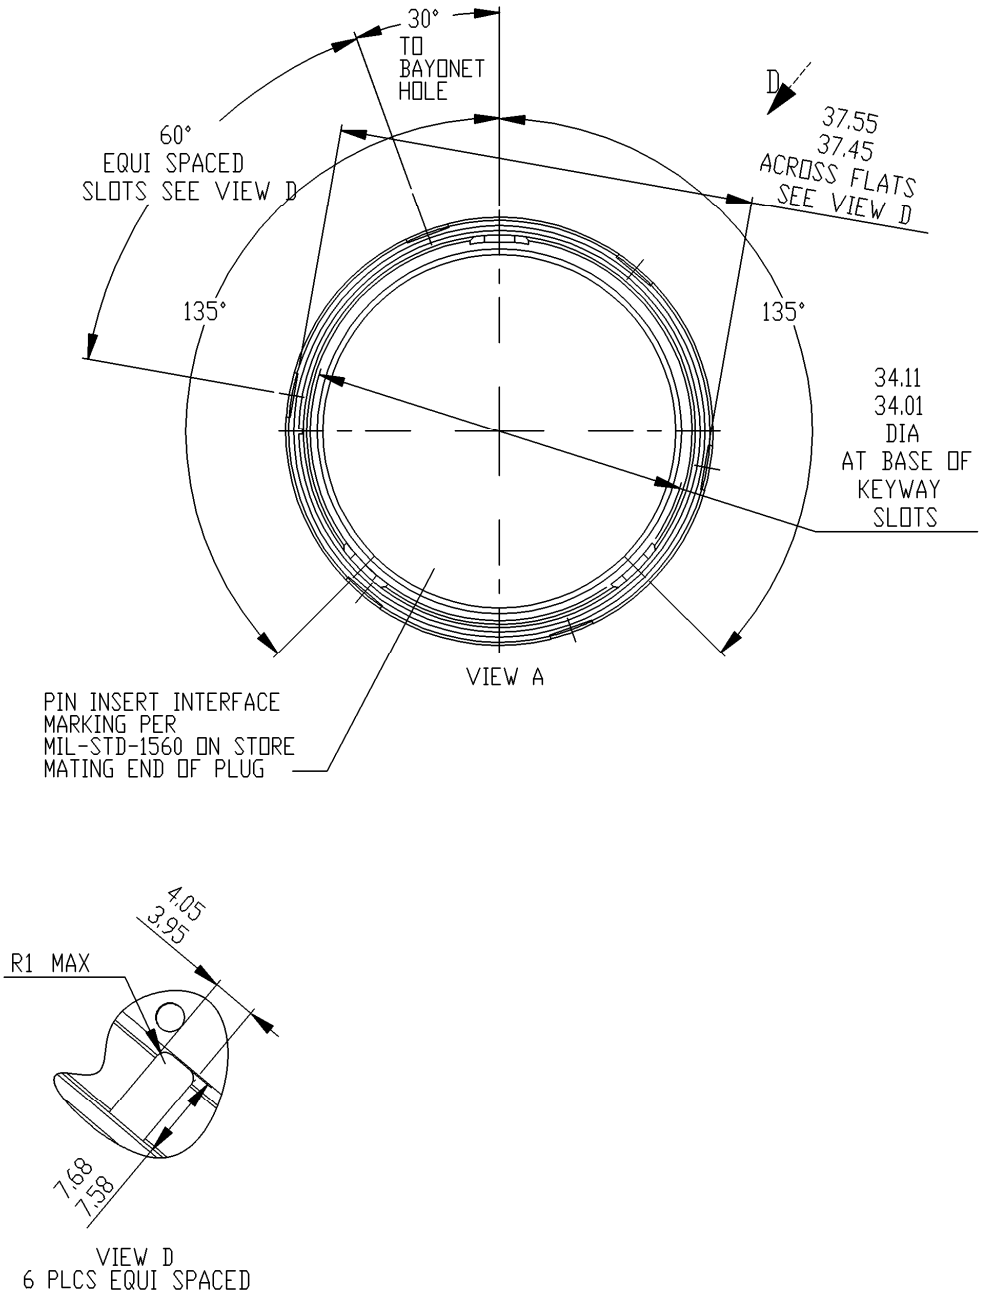


FIGURE 1. Buffer plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:09Z
Check the source to verify that this is the current version before use.


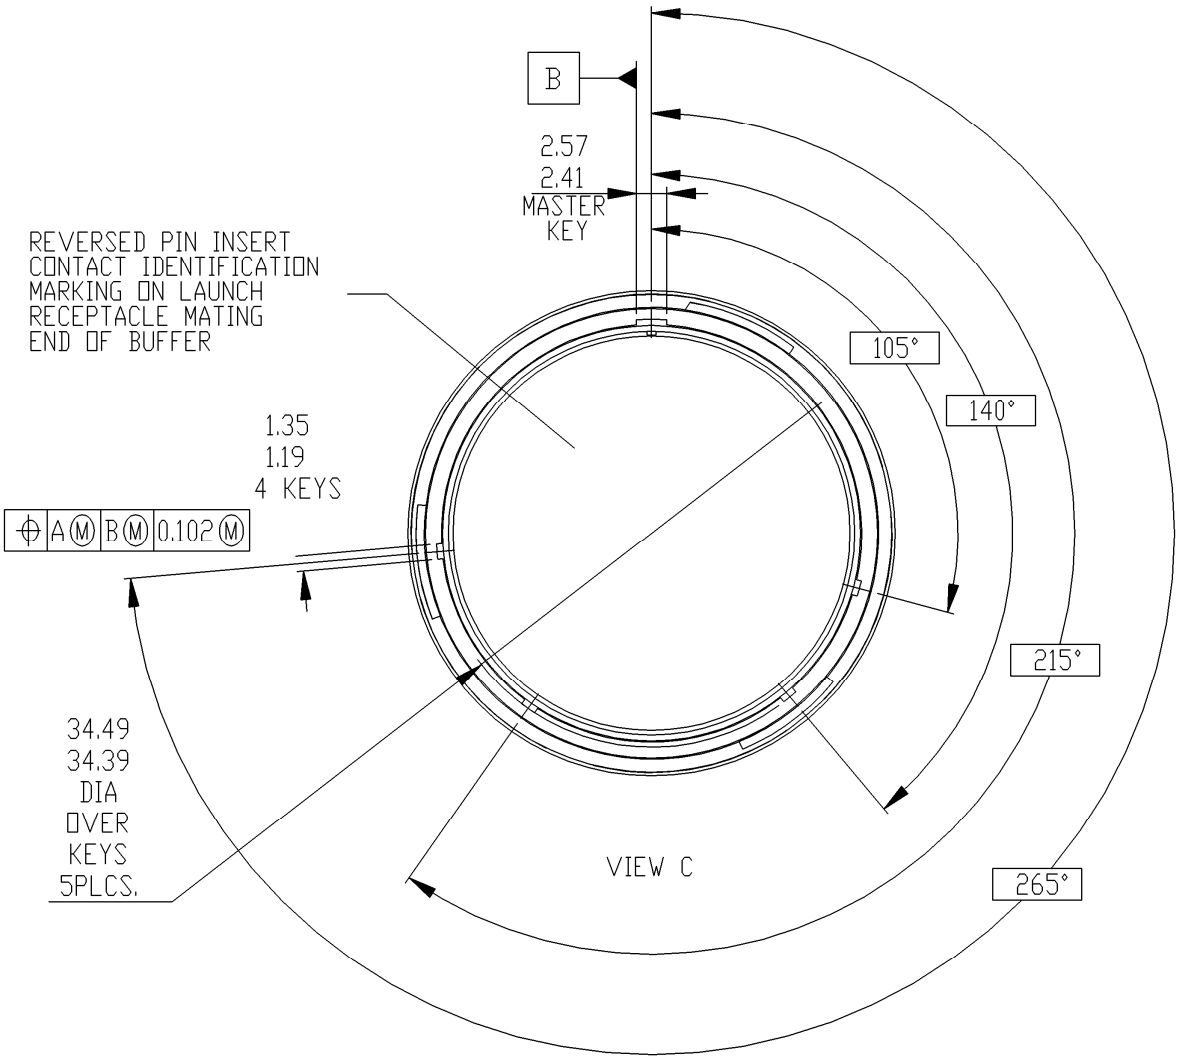


FIGURE 1. Buffer plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:09Z
Check the source to verify that this is the current version before use.

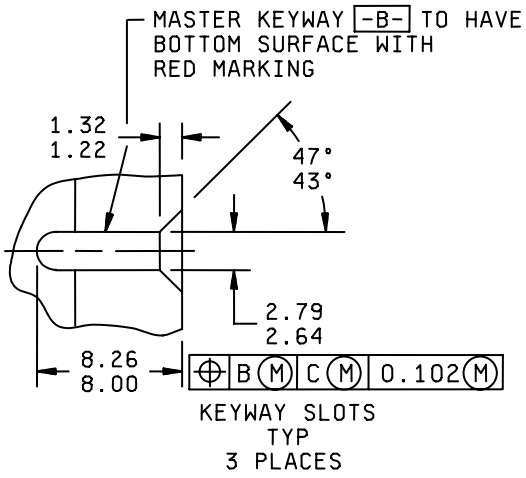

VIEW B

mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.102	0.004	2.49	0.098	7.06	0.278	32.39	1.275	34.49	1.358
0.15	0.006	2.50	0.098	7.56	0.297	32.49	1.279	35.23	1.387
0.20	0.008	2.57	0.101	7.58	0.298	32.59	1.283	35.33	1.390
0.25	0.010	2.80	0.110	7.68	0.302	32.69	1.287	36.27	1.428
0.31	0.012	3.95	0.155	8.08	0.318	32.79	1.290	36.37	1.432
0.36	0.014	4.01	0.158	8.92	0.351	33.40	1.315	37.45	1.474
0.65	0.025	4.05	1.160	13.54	0.533	33.50	1.319	37.55	1.478
1.19	0.047	4.12	0.162	13.97	0.550	33.55	1.320	37.64	1.482
1.35	0.053	4.70	0.185	14.18	0.558	33.65	1.325	37.67	1.483
1.75	0.069	5.72	0.225	14.28	0.562	34.01	1.338	37.76	1.486
2.41	0.095	6.22	0.245	31.65	1.246	34.11	1.343	38.35	1.510
		6.48	0.255	32.28	1.271	34.39	1.354	38.46	1.514

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for information only.
3. The 5.72 - 4.70 dimension is when the coupling nut is pushed towards the rear.

FIGURE 1. Buffer plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.
This connector mates with MIL-DTL-83538/1 or /4, or combination of /1 and /4.
Insert arrangement shall be in accordance with MIL-STD-1560 (25-20).
Part or Identifying Number (PIN) example: M83538/3-1.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83538, this document references the following:

MIL-DTL-83538/1
MIL-DTL-83538/4
MIL-STD-1560
MIL-STD-1760

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

(Project 5935-2006-054)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change. You should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:09Z
Check the source to verify that this is the current version before use.