METRIC

MIL-DTL-83538/7B
2 June 2008
SUPERSEDING
MIL-DTL-83538/7A
24 December 1998

DETAIL SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL, COVER, PROTECTIVE, STORE RECEPTACLE FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83538.


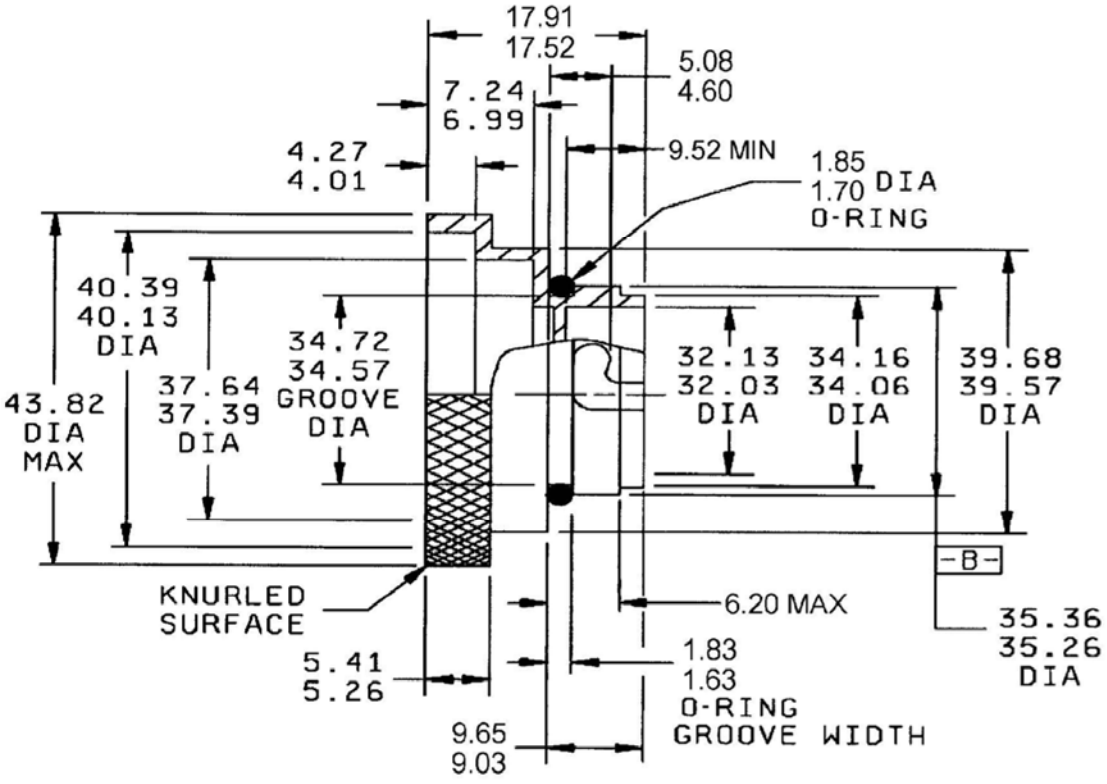



FIGURE 1. Protective store cover receptacle.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

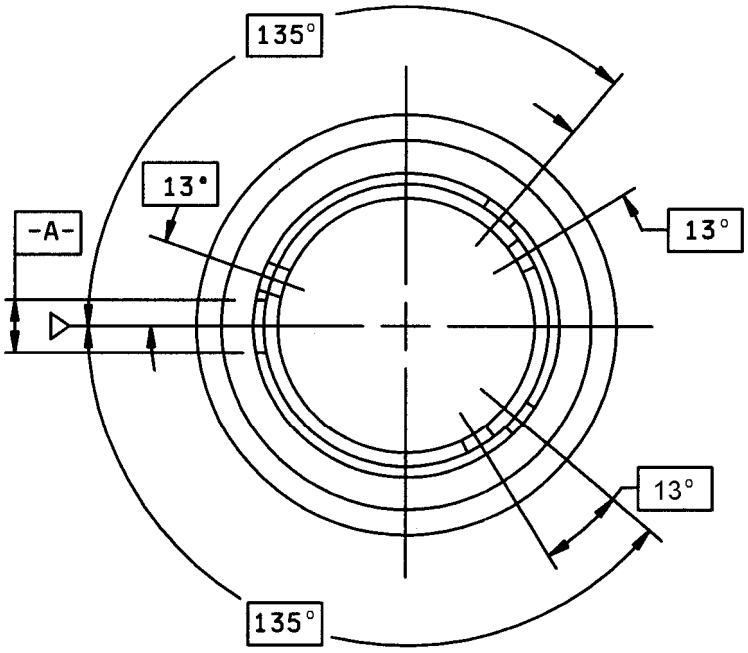

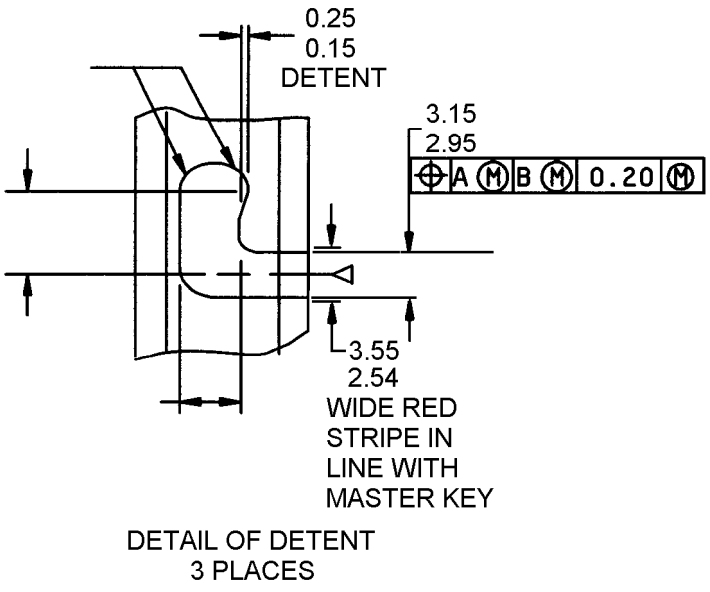

DETAIL OF DETENT
3 PLACES

FIGURE 1. Protective store cover receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.15	.006	2.67	0.105	4.60	0.181	9.93	0.391	35.26	1.388
0.20	.008	2.94	0.1157	4.85	0.190	10.03	0.395	35.36	1.392
0.25	.010	2.95	0.116	5.11	0.201	17.65	0.695	37.39	1.472
1.35	.053	3.05	0.120	5.21	0.205	17.91	0.705	37.64	1.482
1.45	.057	3.15	0.124	5.26	0.207	32.03	1.261	39.57	1.558
1.63	.064	3.55	0.140	5.41	0.213	32.13	1.265	39.68	1.562
1.70	.067	3.81	0.150	6.99	0.275	34.06	1.341	40.13	1.580
1.73	.068	3.96	0.156	7.24	0.285	34.16	1.345	40.39	1.590
1.85	.073	4.01	0.158	9.65	0.380	34.57	1.361	43.82	1.725
2.54	0.100	4.27	0.168	9.91	0.390	34.72	1.367		

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are for information only.

FIGURE 1. Protective store cover receptacle - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This protective cover mates with MIL-DTL-83538/1.

Part or Identifying Number (PIN) example: M83538/7-1.

QUALIFICATION: Protective covers shall be in accordance with the qualification requirements of MIL-DTL-83538. The following details and exceptions shall apply:

Group A: Visual and mechanical examination (100% inspection).

Group B: Not applicable.

Qualification and group C: Two MIL-DTL-83538/7 protective covers with mating connectors shall be required for stand alone qualification. However, if a manufacturer is in the process of qualifying MIL-DTL-83538/1 concurrently with MIL-DTL-83538/7, then one protective cover and mating connector shall be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

Manufacturers that are qualifying this protective cover as a stand alone accessory, shall conduct the following sequence of tests:

Visual and mechanical examination
Salt spray
Humidity
Sand and dust
Coupling torque
Post test examination.

Manufacturers that are qualifying the MIL-DTL-83538/1 concurrently with the MIL-DTL-83538/7, shall conduct the following sequence of tests:

Visual and mechanical examination
Salt spray
Coupling torque
Post test examination.

All testing shall be in accordance with MIL-DTL-83538.

Changes from the previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83538, this document references the following:

MIL-DTL-83538/1
MIL-STD-1760

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

(Project 5935-2007-046)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.