
INCH - POUND
MIL-S-83505/5D
25 September 1991
SUPERSEDING
MIL-S-83505/5C
30 November 1987

MILITARY SPECIFICATION SHEET


SOCKETS (LEAD, ELECTRONIC COMPONENTS) (TYPE V, OTHER)

This specification is approved for use by all Departments and Agencies of the department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solictation: MIL-S-83505

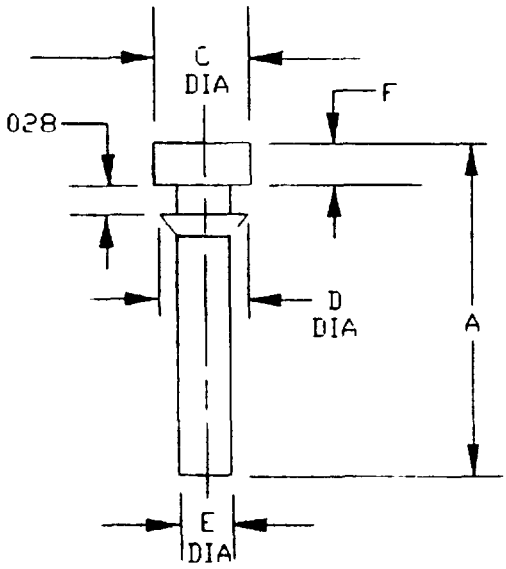

Ⓓ CONFIGURATION A
-001 THRU -006

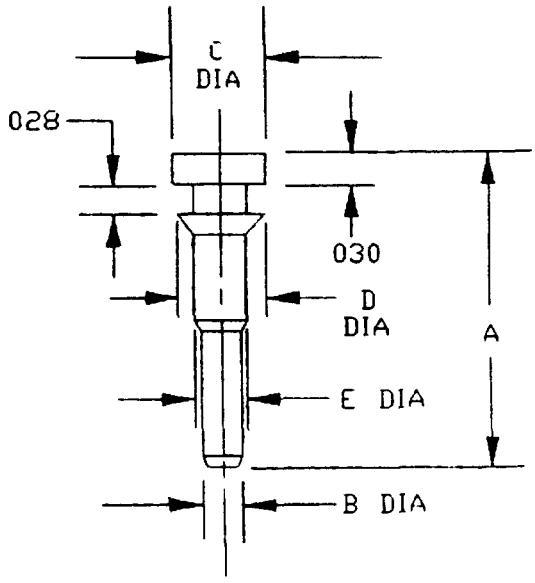


CONFIGURATION B
-007,-008, -021
AND -022

FIGURE 1. Socket, lead, (type V) other.


Ⓓ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

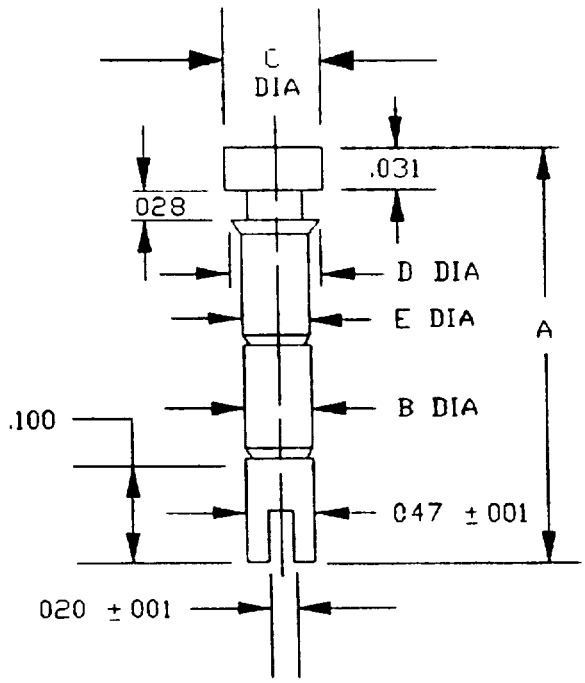


CONFIGURATION C
-009 AND -010

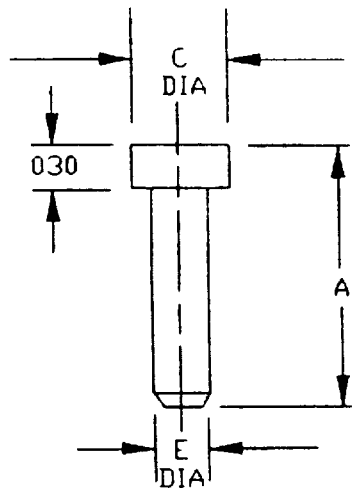

CONFIGURATION D
-011,-012,-023
AND -024

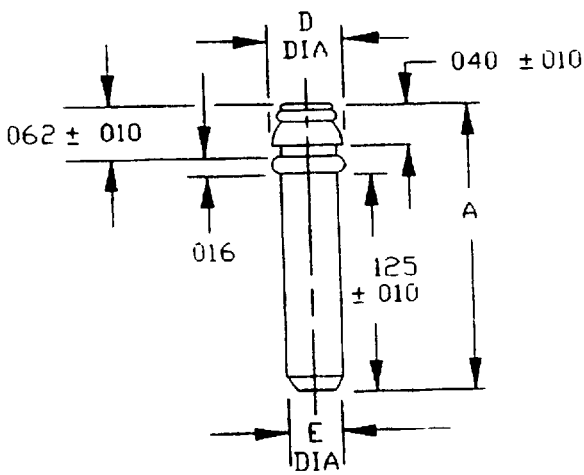

CONFIGURATION E
-013 AND -014

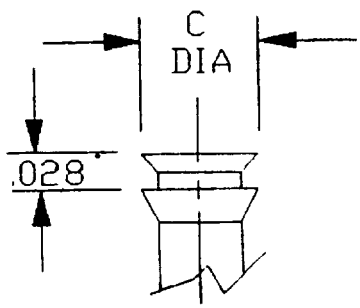

CONFIGURATION F
-005 AND -006

FIGURE 1. Socket, lead, (type V) other - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

Dash number	Configuration	Accepts pin		A ±.010	B	C	D DIA ± 002	E	F
		Length	Dia						
-001	A	.175	.021	.203		062	060	.052	.030
-002		.125	.016						
-003	A	.281	.040	.332		.100	.093	.084	.020
-004		.187	.016						
-005	A and F	.281	.050	312		115	110	.098	
-006		.187	.040						
-007	B	.116	.021	.232	053	.072	110	.044	
-008		.100	.016						
-009	C	.185	.020	.331		072	061	.054	
-010		.120	.016						
-011	A	.185	.030	.250		.093		.068	
-012		.140	.021						
-013	A	.155	.021	203			.078	060	
-014		.125	016						
-021	D	.125 .100	.021 .016	.219	.054	.072	060	.055	
-022	B	125 100	.021 .016	.219	.054	.072	.054	.055	
-023	D	.170 .100	.021 .016	203		.072		.054	
-024	D	.170 100	.021 016	203		.072		.054	

FIGURE 1. Socket, lead, (type V) other - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

Dash number	Recommended mounting hole dia ±.001	Test gauge "B" length (minimum) see note	Mating force (max) (lbs)	Sleeve plating
-001	.055	.125	1.25	Gold
-002				Tin/lead
-003	.086	.187	5.00	Gold
-004				Tin/lead
-005	.104	.187	12.00	Gold
-006				Tin/lead
-007	.055	.100	4.00	Gold
-008				Tin/lead
-009	.055	.120	1.25	Gold
-010				Tin/lead
-011	.082	.140	4.00	Gold
-012				Tin/lead
-013	.070	.125	1.25	Gold
-014				Tin/lead
-021	.055	.100	1.25	Gold
-022	.055	.100	1.25	Tin/lead
-023	.055	.100	1.25	Gold
-024	.055	.100	1.25	Tin/lead

Ⓓ NOTE: See MIL-S-83505.

FIGURE 1. Socket, lead, (type V) other - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.050	1.27	.084	2.13	.170	4.32
.010	0.25	.052	1.312	.086	2.18	.175	4.44
.016	0.41	.053	1.35	.093	2.36	.185	4.70
.017	0.43	.054	1.37	.098	2.49	.187	4.75
.018	0.46	.055	1.40	.100	2.54	.203	5.16
.020	0.51	.060	1.52	.156	2.64	.219	5.56
.021	0.53	.061	1.55	.110	2.79	.232	5.89
.028	0.71	.062	1.57	.115	2.92	.250	6.35
.030	0.76	.068	1.73	.116	2.95	.281	7.13
.031	0.79	.070	1.78	.120	3.05	.331	8.40
.040	1.01	.072	1.82	.125	3.17	.330	8.38
.044	1.12	.078	1.98	.140	3.56	.332	8.43
.047	1.19	.082	2.08	.155	3.94		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 1. Socket, lead, (type V) other - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Terminals: Type V (other)

Mounting: Use .062 inch (1.57 mm) minimum thickness mounting board.

Pull test: Not required on all -011, -012, -15 through -018, -023, and -024.

Socket retention test: Not applicable to -011, -012, -023, and -024.

Group qualification: Qualification of -001, -002, -007, -009, or -010 qualifies others in this group. -003, -006, and -011 through -024 are each qualified separately.

(D) Part or Identifying Number (PIN): M83505/5 - (dash number from figure 1).

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3795-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:22Z
Check the source to verify that this is the current version before use.