

MILITARY SPECIFICATION SHEET


TRANSFORMER, VARIABLE, POWER, 400 HZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-83721.

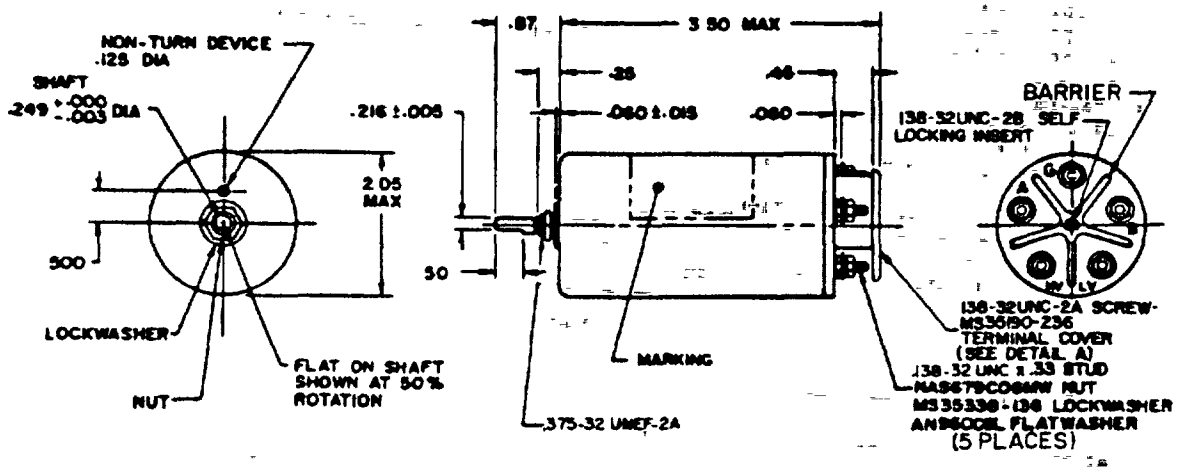

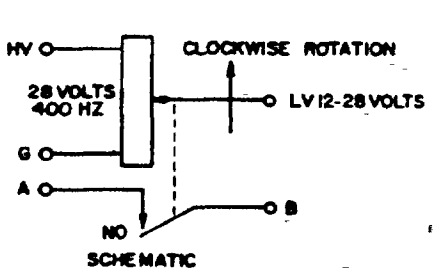

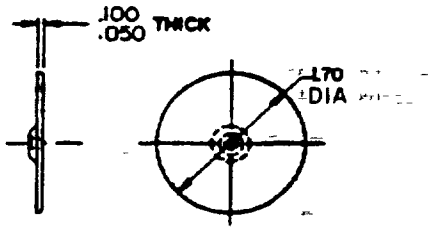

REMOVABLE NONCONDUCTIVE TERMINAL COVER DETAIL "A"

INCHES	MM	INCHES	MM
.003	08	249	6 32
.006	.13	.25	6.35
015	.38	.33	8.38
.050	1.27	.375	9.53
060	1.52	45	11 45
.100	2 54	.500	12.70
.125	3.18	.87	22.10
138	3 51	1.70	43.18
.216	5 49	2 05	52.07
		3.50	88 90

NOTES
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.76 mm) for two place decimals.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction
Dimensions and configuration: See figure 1.
Class II.
Enclosure Applicable
Weight. 0.65 pound maximum.
Switch Part No MS24547-1. Switch to close within 10 degrees of maximum rotation
Temperature range -54° to 71°C
Electrical ratings
Input. 24.2 - 30.4 volts rms, 400 ±40 Hz
Output. See table I.
Resistive load. 11 5 ampere lamp load.

TABLE I. Rotational parameters

Shaft rotation	Linear output voltage	Switch position
0°	$12^{+5}_{-.0}$	Open
265° min	28 ±.5	Open

Angular rotation 295^{+5}_{-0} degrees angular rotation.

Shaft torque 20 ounce-inches minimum (torque shall be sufficient to prevent self-rotation by vibration)

Dielectric withstanding voltage
At atmospheric pressure 25 applications of 1,050 volts rms

At barometric pressure. Method 105 of MIL-STD-202, test condition C (70,000 feet), test voltage, 300 volts rms

Electrical characteristics:
Voltage regulation 1 78 percent
Efficiency 86 percent minimum at 28 volts rms, input and rated load.

Temperature rise 60°C at 25°C ambient with 28 volts rms, 400 Hz

Salt spray (corrosion) Applicable

Vibration, high frequency Applicable

Shock (specified pulse) Method 213 of MIL-STD-202, test condition I

Life (rotational). Method 206 of MIL-STD-202, test condition E (15,000 cycles).

Fungus. Applicable.

Part number M83721/1-01

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:15Z
Check the source to verify that this is the current version before use.

Custodians
Army - EL
Navy - EC
Air Force - 85

Review activities
Army - EL, MU
Navy - EC
Air Force - 11, 17, 80
DSA - ES

User activities
Army - EL, MI
Navy - MC, EC
Air Force - 19

Preparing activity
Air Force - 85

Project No. 5950-0470-1

☆ U S GOVERNMENT PRINTING OFFICE 1975 603 118 4825

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-T-83721/1 Transformer, Variable, Power, 400 HZ FSC 5950

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A GIVE PARAGRAPH NUMBER AND WORDING

   B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:15Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

AFLC/MMGE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:15Z
Check the source to verify that this is the current version before use.