MILITARY SPECIFICATION

TONG SET, POWERED, SKID-MOUNTED

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers powered tong sets designed to connect and disconnect threaded pipeline sections in horizontal placement operations.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

TT-P-664 - Primer Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-P-40 - Packaging and Packing of Hand Tools.
PPP-T-60 - Tape: Packaging, Waterproof.

MILITARY

MIL-C-104 - Crates, Wood; Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116 - Preservation, Methods of.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3835

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

MIL-R-196 - Repair Parts, Accessories, and Kits, Mechanical; Packaging of.
MIL-C-3774 - Crates, Wood; Open 12,000- and 16,000-Pound Capacity.
MIL-C-5501 - Caps and Plugs, Protective, Dust and Moisture Seal General Specification for.
MIL-E-10062 - Engines: Preparation for Shipment and Storage of.
MIL-P-46093 - Primer Coating, Synthetic (for Brake Drums).

STANDARDS

MILITARY

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking and Waterproofing; With Appropriate Test Methods.

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The tong set shall consist of a powered tong, backup tong, power system and controls, and steel skid-type frame.

3.2 First article. When specified (see 6.2), the contractor shall furnish one complete tong set for first article inspection and approval (see 4.2.1 and 6.4).

3.3 Standard commercial product. The tong set shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the tong set being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

3.4 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.5 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.6 Performance. The tong set shall be capable of applying torque in either direction to threaded pipe and coupled joints of the nominal pipe size specified (see 6.2). The connecting torque shall be not less than 1,500 foot-pounds at 80 revolutions per minute (rpm). The disconnecting torque shall be not less than 9,000 foot-pounds at 14 rpm. When maximum torque is applied, there shall be no slipping, cutting, grooving, thread stripping, collapse of the pipe, damage, or misalinement of the tong set or parts. Operation of controls shall be smooth and easy.

3.7 Design and construction. The tong set must position the pipe to allow engagement of the pipe joint being connected. Lateral movement of the powered tong shall be provided in two directions to allow for connecting and disconnecting pipe joints. All operating parts of the tong shall be assembled on a skid base. There shall be no damage to any part of the tong set from scraping or contact with fittings when the pipeline is inserted or fed through.

3.7.1 Tongs. The tongs shall be concentrically alined with the launching platform connections on the steel frame. The tongs shall be designed to allow no reactionary torque or lateral stresses on the pipeline side of the backup tong. The tongs shall have double-acting jaws.

3.7.1.1 Powered tong. The powered tong shall be of the open design. The pipe-gripping jaws shall be fitted with replaceable inserts of hardened tool steel. When specified (see 6.2), complete replacement sets of inserts shall be provided. The tong shall be mounted on a roller-rail arrangement and provided with powered rams to withdraw the tong from the pipeline. Lateral movement shall be provided for the powered tong to bring the ends of pipe and coupling together, and to provide for advance of the pipe thread during connection and disconnection of the pipe joints. The protective housing shall enclose the retracted jaws sufficiently to prevent damage from contact with couplings. The pipe rotating drive assembly shall have a protective housing adequate for all weather operations on beaches. The powered tong shall incorporate door opening arrangements in the protective housing and in the pipe rotating drive assembly. This provides for removal of the tong from a pipeline without feeding the pipeline through the tong. Powered rams and safety devices shall be provided when the door opening devices are heavy or hard to handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

3.7.1.2 Backup tong. The backup tong shall be a pipe gripping and locking device mounted at the pipeline edge of the steel frame skid base. The pipe-gripping jaws shall be fitted with replaceable inserts of hardened tool steel. When specified (see 6.2), complete replacement sets of inserts shall be provided. Powered rams or other means shall be provided to insure positive locking and quick release. Operating clearances shall be not less than those of the powered tong. The backup tong locking control or device shall not be subject to accidental release.

3.7.2 Power system and controls. The tong set shall be operated by pneumatic power. Controls shall be conveniently located to provide a safe, continuous view, by the operator, of the pipe joint being made up.

3.7.2.1 Pneumatic power system. The pneumatic power system shall be complete with pressure gage, quick-disconnect air supply fitting, shutoff valve, air lubricator, moisture trap, reversing-type air motor, and pneumatic rams as required. The air motor shall be provided with a 2-speed transmission designed to meet the performance requirements of 3.6 when supplied with air at 350 cubic feet per minute (cfm) at not less than 100 pounds-force per square inch (psi).

3.7.3 Steel frame skid base. All operating parts of the tong set shall be assembled on the skid base. The skid base shall be as indicated in figure 1, with suitable modifications to fit the equipment furnished. Ample clearance shall be provided to prevent binding and jamming due to the natural sag of the pipeline. Each corner of the frame shall be provided with a leveling jack, or similar arrangement, to provide for precise alinement of the connection anchor brackets with the pipeline launching assembly as indicated in figure 1.

3.8 Lubrication. Unless otherwise specified (see 6.2), means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. All parts requiring lubrication shall be lubricated as specified in section 5. Hydraulic lubrication fittings shall be in accordance with SAE J534. Where use of high pressure lubricating equipment, 1,000 psi or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location.

3.9 Cleaning, treatment, and painting. Surfaces normally painted in good commercial practice shall be cleaned, treated, and painted as specified herein. The color of the finish coat shall be as specified (see 6.2). Surfaces to be painted shall be cleaned and dried to insure that they are free from contaminants, such as oil, grease, welding slag and spatter, loose mill scale, water, dirt, corrosion product, or any other contaminating substances. As soon as practicable after cleaning, and before any corrosion product or other contamination can result, the surfaces shall be prepared or treated to insure the adhesion of the coating system. The painting shall consist of at least one coat of primer and one finish coat. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. Painting shall be with manufacturer's current materials according to manufacturer's current processes and the total dry film thickness shall be not less than 2.5 mils over the entire surface. The paint shall be free from runs, sags, orange peel, or other defects.

3.10 Identification plate. An identification plate will be furnished by the contracting officer for each tong set. The contractor shall stamp all necessary data in the blank spaces of the plate provided for that purpose, and

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

securely affix a plate to each tong set in a conspicuous place with brass screws or bolts not less than 1/8 inch in diameter. The applicable nomenclature contained in the contract item description shall be placed in the top blank.

3.11 Instruction plates. The tong set shall be equipped with instruction plates suitably located, describing any special or important procedures to be followed in operating and servicing the equipment. Plates shall be of a material which will last and remain legible for the life of the equipment, and shall be securely affixed thereto with nonferrous screws or bolts of not less than 1/8-inch diameter.

3.12 Workmanship.

3.12.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.12.2 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.12.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

3.12.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

3.12.5 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

4.1.1 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one complete tong set when a first article is required (see 3.2 and 6.4). This inspection shall include the examination of 4.3 and the tests of 4.4. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.3, the tests of 4.4, and the packaging inspection of 4.5. This inspection shall be performed on all tong sets.

4.3 Examination. Each tong set shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.4 Tests. The tong set shall be serviced as required and tested by disconnecting and connecting not less than three reverse buttress-threaded pipe connections of the pipe size specified (see 3.6). A pipeline of not less than three random lengths of commercial coupled pipe shall be fed through the eyes of the tong set. The driving torque of the powered tong and holding power of the backup tong shall be tested by a dynamometer and recorded. Pneumatic powered tong sets shall be supplied with 350 cfm air at not less than 100 psi. Damage to the tong set or pipe, difficulty in alining ends during pipe joint connection, springing loose of coupled joints during pipe joint disconnection, or failure to conform to any requirement of this specification shall be cause for rejection. All tong sets shall be tested for fit and operation of all moving parts, smoothness of operation, control, and freedom from binding or excessive looseness.

4.5 Packaging inspection. The preservation, packing, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

5.1.1.1 Disassembly. Disassembly shall be the minimum necessary to protect parts subject to damage or loss, and to accomplish reduction in cube. Removed bolts, nuts, pins, screws and washers shall be reinstalled in mating parts and secured to prevent their loss.

5.1.1.2 Matchmarking. Parts removed and mating parts on the equipment and attachments shall be matchmarked to facilitate reassembly. Parts and accessories removed, and mating parts on the equipment, shall be identified with weatherproof tags attached to mating parts and locations. Markings shall be applied to the tags with a waterproof material.

5.1.1.3 Methods of preservation. Cleaning processes, drying procedures, preservatives, and methods of preservation specified in the following paragraphs are listed in MIL-P-116 and shall conform to the requirements of MIL-P-116 and any applicable specifications.

5.1.1.4 Cleaning and drying. Prior to the application of preservative compounds or paint, surfaces shall be cleaned by process C-1 and dried by any applicable procedure of MIL-P-116.

5.1.1.5 Unprotected surfaces. Unprotected exterior metal surfaces requiring the application of a contact preservative in accordance with MIL-P-116 and not specifically provided for herein shall be preserved as follows:

5.1.1.5.1 Unfinished (not machined) surfaces. Unfinished exterior metal surfaces shall be coated with type P-1 preservative.

5.1.1.5.2 Machined surfaces. Exposed machined surfaces shall be coated with type P-6 or P-11 preservative and wrapped or covered, as applicable, with barrier material conforming to MIL-B-121, type I, grade A, class 2. The material shall be secured in place with waterproof tape.

5.1.1.6 Engines. Engines, engine components, and accessories shall be preserved in accordance with the level A requirements of MIL-E-10062, type II, method I.

5.1.1.7 Clutches. All surfaces of clutch assemblies, except composition facings, shall be coated with a thin film of primer conforming to TT-P-664 or MIL-P-46093. The clutches shall be completely disengaged.

5.1.1.8 Enclosed gears. Enclosed gears shall be filled to the operating level with the approved lubricant required for operation. The gear housing shall be identified with a weatherproof tag to indicate "The housing is filled to the operating level with lubricant required for operation. Do not drain until first required lubrication change." Markings shall be applied to the tags with a waterproof material. The tags shall be attached in a conspicuous location.

5.1.1.9 Enclosed chains. Enclosed chains and chain housings shall be preserved and tagged as specified in 5.1.1.8 for enclosed gears.

5.1.1.10 Air motor. Coat interior surfaces of air motors with type P-10 preservative by applying the preservative through the lubricating system or by feeding the preservative into the air inlet. Attach airhose and operate the motors until preservative appears at the exhaust port. Cover all openings into

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

the interior of the motors, such as air inlets and outlets, with caps or plugs conforming to MIL-C-5501 or with waterproof tape. Coat exterior unpainted metal surfaces of the air motor and hose couplings and fittings with type P-1 preservative.

5.1.1.11 Jaw assemblies and rams. The jaw assembly dies and exposed machined surfaces of pneumatic-powered rams shall be coated with type P-6 preservative. The preservative coated surfaces shall be wrapped or covered with barrier material conforming to MIL-B-121, type I, grade A, class II, and secured in place with tape conforming to PPP-T-60, type IV.

5.1.1.12 Lubrication. Lubricate all grease fittings with type P-11 preservative. Bearings should be lubricated with a compound specified by the manufacturer. Lubricate control mechanisms, linkage, hinges, fasteners, and all pivot points with P-10.

5.1.1.13 Maintenance tools. Maintenance tools shall be preserved in accordance with level A preservation and packaging requirements of PPP-P-40.

5.1.1.14 Technical publications. Technical publications for each piece of equipment shall be preserved method IC-1 or IC-3.

5.1.1.15 Repair parts. The preservative application criteria and applicable methods of preservation of MIL-P-116 shall be used to preserve repair parts. When specified (see 6.2), the repair parts shall be preserved in accordance with level A requirements of MIL-R-196, or when parts are not specifically covered in MIL-R-196, an applicable submethod of preservation of MIL-P-116 shall be used.

5.1.1.16 Consolidation. If provided, toolboxes shall be utilized for the consolidation of loose components, tools, and publications. Toolboxes shall be secured to prevent pilferage. The remainder of the components that will not fit in the toolboxes shall be consolidated, along with disassembled components, in boxes conforming to PPP-B-601, overseas type, or PPP-B-621, class 2. The contents shall be cushioned, blocked, and braced to prevent movement in accordance with MIL-STD-1186. Boxes shall be secured to the equipment with appropriate strapping. Arrangement and location on the equipment shall be such so as not to increase cubage or interfere with lifting of the equipment.

5.1.2 Commercial. The tong set shall be preserved in accordance with the contractor's standard practice in a manner to prevent deterioration and damage.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A. Each complete tong set, together with packaged and unpackaged disassembled components, accessories, repair parts, tools, and publications, shall be packed in a crate conforming to MIL-C-104, style a, class optional. Unless otherwise specified (see 6.2), crates shall be type II. The contents shall be anchored, blocked, and braced in accordance with the crate specification.

5.2.2 Level B. Each complete tong set, together with packaged and unpackaged disassembled components, accessories, repair parts, tools, and publications, shall be packed in an open type crate conforming to MIL-C-3774, type I, style A. The contents shall be anchored, blocked, braced, and waterproofed with a shroud in accordance with the crate specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial. The tong set shall be prepared for shipment in a manner which will insure arrival at destination in a satisfactory condition. Preparation for delivery shall comply with applicable carrier rules and regulations.

5.3 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Powered tong sets are intended for use during the launching and retrieving of Advanced Base Functional Components' bottom laid sea loading fuel lines, and may be used with threaded pipe in the assembly of tank farm complexes.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of document required if other than as specified (see 2.1.1).
c. When a first article is required for inspection and approval (see 3.2, 4.2.1 and 6.4).
d. Nominal pipe size(s) that tong set is to be capable of handling (see 3.6).
e. When replacement sets of inserts are required (see 3.7.1.1 and 3.7.1.2).
f. When lubrication is to be other than as specified (see 3.8).
g. Color of the finish coat (see 3.9).
h. Level of preservation and level of packing required (see 5.1 and 5.2).
i. When MIL-R-196 is to be used for preservation of repair parts, in lieu of MIL-P-116 (see 5.1.1.15).
j. When other than type II crates are required (see 5.2.1).

6.3 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423 Contract Data Requirements List (CRDL) and invokes the provisions of paragraph 7-104.9(n) of the Defense Acquisition Regulations (DAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL (DD Form 1423) incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data shall be delivered in accordance with the contract requirements.

6.4 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one complete tong set. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:

Navy - YD

Project No. 3835-0054

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

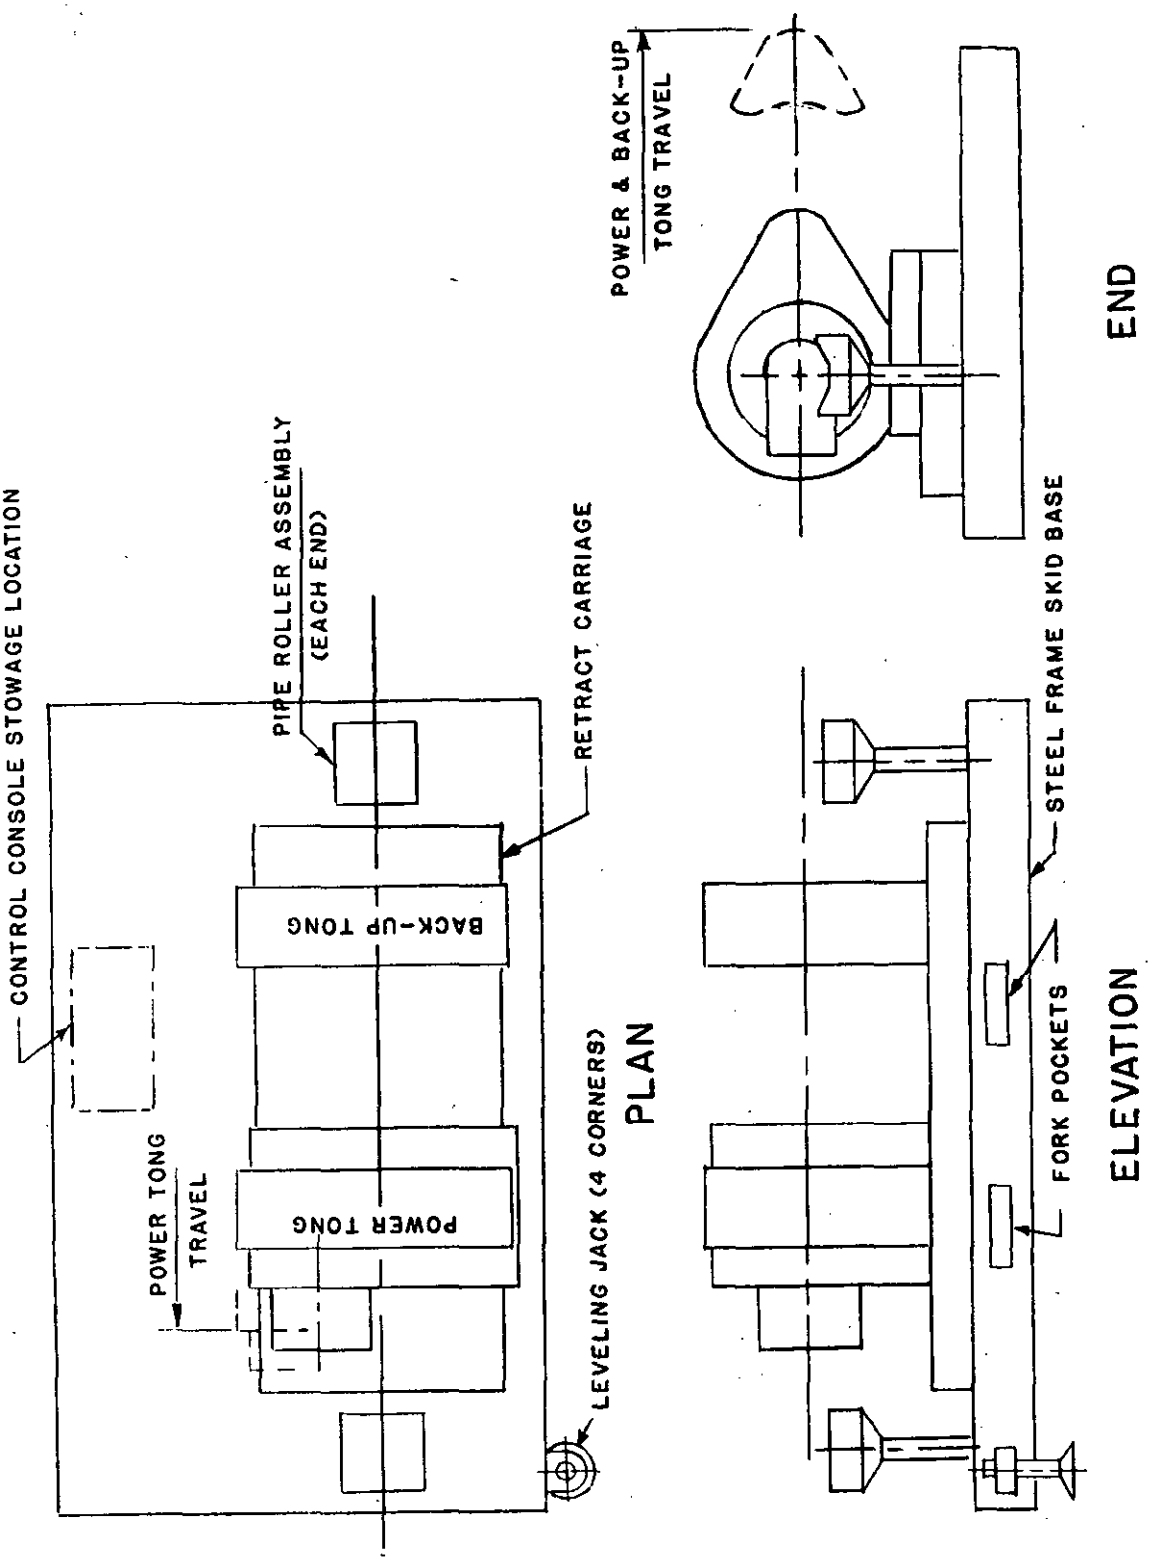


FIGURE 1. TONG GENERAL ARRANGEMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDING OFFICER (156)
NAVAL CONSTRUCTION BATTALION CENTER
PORT HUENEME, CA 93043

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. 3835-0054

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-82097B(YD) - TONG SET, POWERED, SKID-MOUNTED

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:41Z
Check the source to verify that this is the current version before use.