INCH-POUND

MIL-PRF-83446/31
1 June 2000

PERFORMANCE SPECIFICATION SHEET

COILS, RADIO FREQUENCY, CHIP, FIXED, PHENOLIC CORE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-83446.

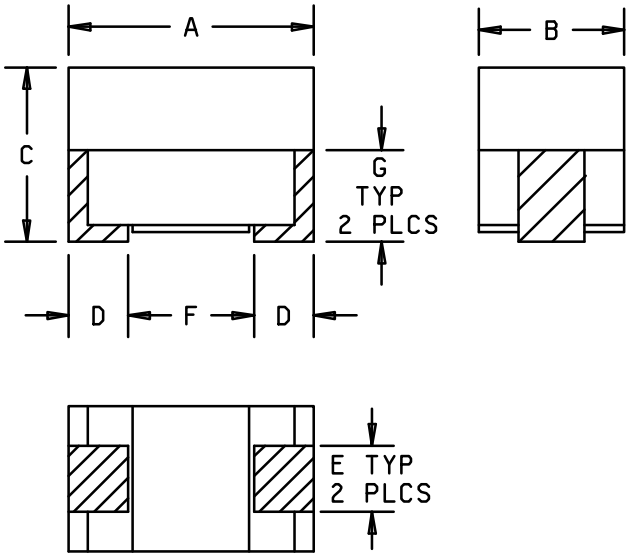


| | Inches | Millimeters |
|---|---|---|
| A | .300 to .325 | 7.62 to 8.26 |
| B | .105 to .125 | 2.67 to 3.18 |
| C | .125 to .145 | 3.18 to 3.68 |
| D | .020 Min. | .508 Min. |
| E | .040 to .060 | 1.02 to 1.52 |
| F | .190 Ref. | 4.83 Ref. |
| G | .070 Ref. | 1.78 Ref. |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial).

| Dash Number | Inductance µH ±10% | Q (min) | Test Frequency (L and Q) MHz | Self Resonant Frequency MHz (min) | DC Resistance Ohms (max) | Current Rating mA (max) |
|---|---|---|---|---|---|---|
| -01 | .10 | 40 | 25 | 680 | .08 | 1380 |
| -02 | .12 | 40 | 25 | 640 | .09 | 1300 |
| -03 | .15 | 38 | 25 | 600 | .10 | 1230 |
| -04 | .18 | 35 | 25 | 550 | .12 | 1120 |
| -05 | .22 | 33 | 25 | 510 | .14 | 1040 |
| -06 | .27 | 33 | 25 | 430 | .16 | 975 |
| -07 | .33 | 30 | 25 | 410 | .22 | 830 |
| -08 | .39 | 30 | 25 | 365 | .30 | 710 |
| -09 | .47 | 30 | 25 | 330 | .35 | 660 |
| -10 | .56 | 30 | 25 | 300 | .50 | 550 |
| -11 | .68 | 28 | 25 | 275 | .60 | 500 |
| -12 | .82 | 28 | 25 | 250 | .85 | 420 |
| -13 | 1.00 | 25 | 25 | 230 | 1.00 | 390 |

TABLE II. Electrical characteristics (final).

| Inspection group | Allowable percent variation from the initial measurement | | | |
|---|---|---|---|---|
| Qualification Inspection: | Inductance | Q | Self-resonant Frequency | DC resistance |
| Group II | ±5 | -10 | -8 | ±3 (+.001 ohm) |
| Group IV | ±5 | -10 | -10 | ±3 (+.001 ohm) |
| Group V | ±5 | -15 | ----- | ----- |
| Quality Conformance Inspection: | | | | |
| Group C | | | | |
| Subgroup II | ±5 | -15 | -10 | ±2 (+.001 ohm) |
| Subgroup IV | ±5 | -10 | -8 | ±3 (+.001 ohm) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

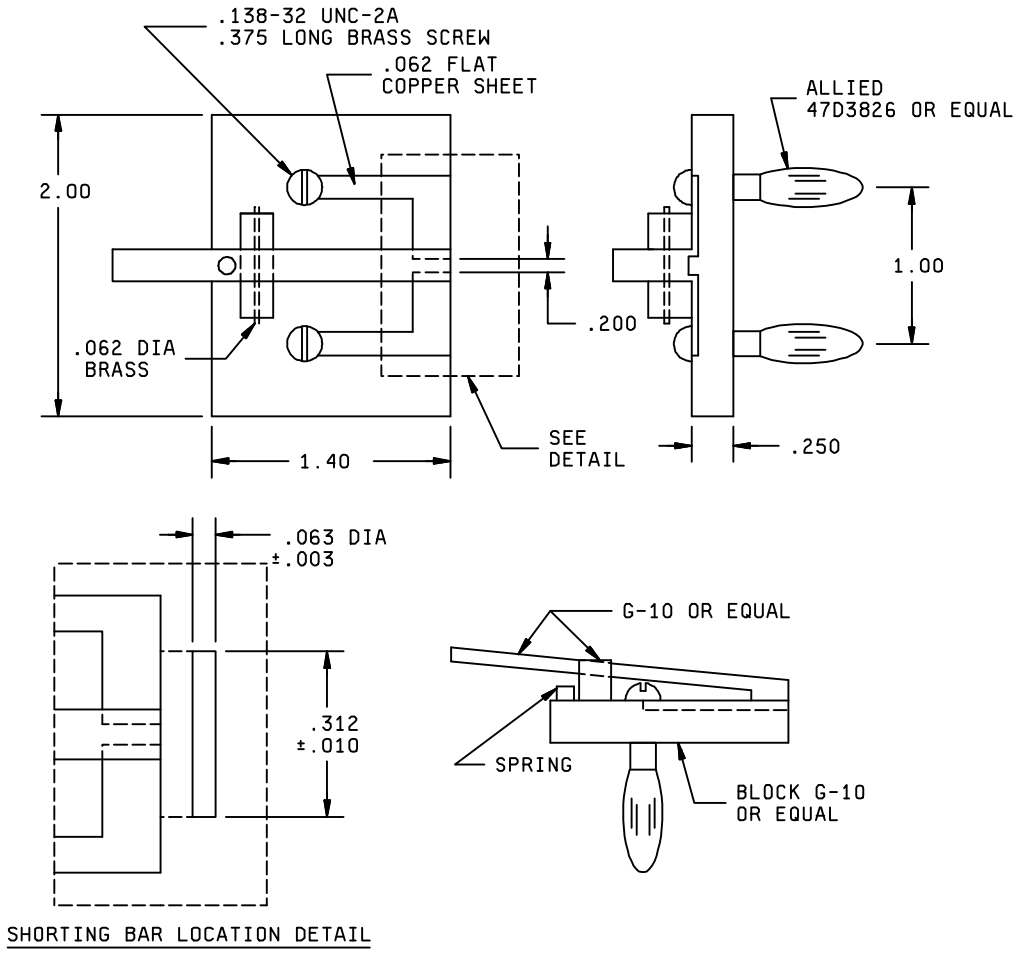


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Shorting bar material is brass.
4. The total fixture and residual inductance is approximately .049µH (for references only).

FIGURE 2. General test fixture, (TF - 388).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

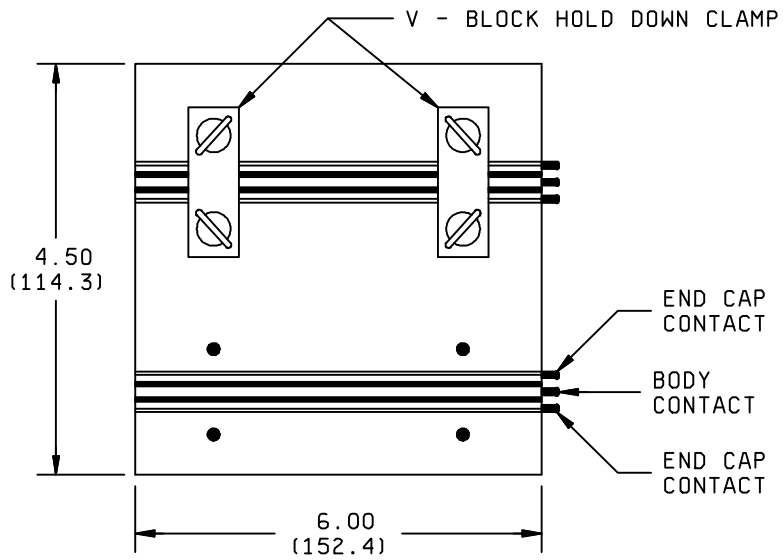


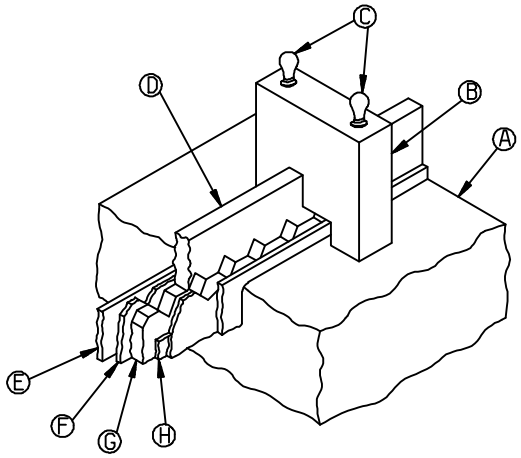


ENLARGED CUT-AWAY OF CLAMP

| Legend | |
|---|---|
| LTR | Description |
| A | G-10 base |
| B | Upper V-block hold-down clamp |
| C | Clamp screws |
| D | Upper V-block (body contact) |
| E | End cap contact retaining wall |
| F | End cap contact V-block (in contact with E) |
| G | Lower V-block (body contact) |
| H | G-10 insulators (separating G from F/E) |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 3. Test fixture for insulation resistance, dielectric withstanding voltage and barometric pressure.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Bond strength: Force 2 pounds.

Weight: 0.30 gram maximum.

Operating temperature range: -55°C to +125°C.

Temperature rise (at +90°C): +35°C.

Maximum operating temperature: +125°C.

Altitude: 70,000 feet.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 500 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202, (70,000 feet), test voltage 200 volts rms.

Electrical characteristics (initial): See table I.

Electrical characteristics (final): See table II.

Test fixture: Tests shall be performed using test fixtures shown on figure 2 and 3, or equivalent.

Part or Identifying Number (PIN): The PIN shall be in the following form:

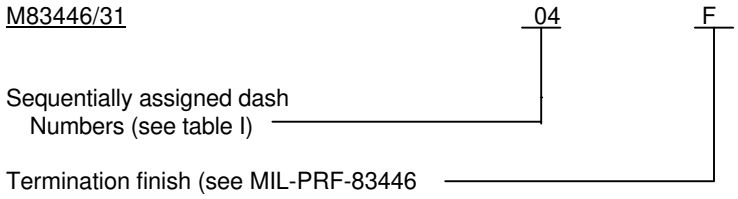


Custodians:
Army - CR
Navy - EC
Air Force - 11

Review activities:
Army - MI
Navy - AS, OS
Air Force - 19

Preparing activity:
DLA - CC

(Project 5950-1047)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:12Z
Check the source to verify that this is the current version before use.